Ŋ




Max. Lifting Capacity: 55 t x 3.7 m Max. Crane Boom Length: 51.8 m Max. Fixed Jib Combination: 42.7 + 12.2 m, 39.6 + 18.3 m Max. Tower Jib Combination: 42.4 + 29.0 m


(909) 222-0202

260 North Smith Ave. Corona, CA 92880

L,

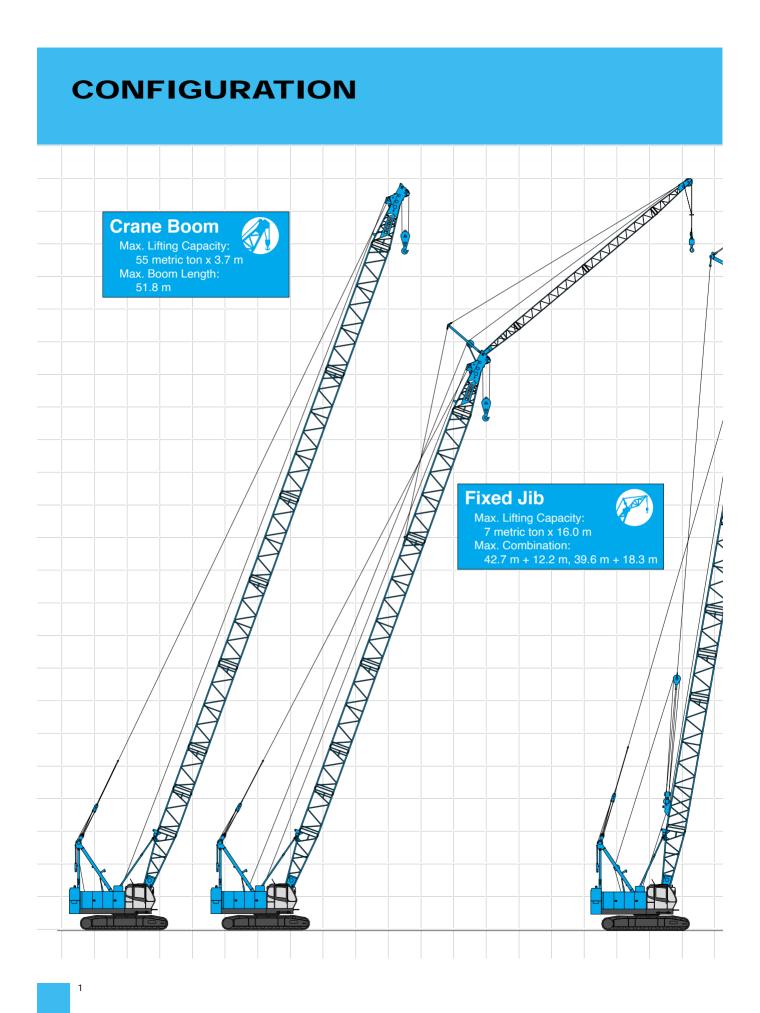

(909) 222-0202

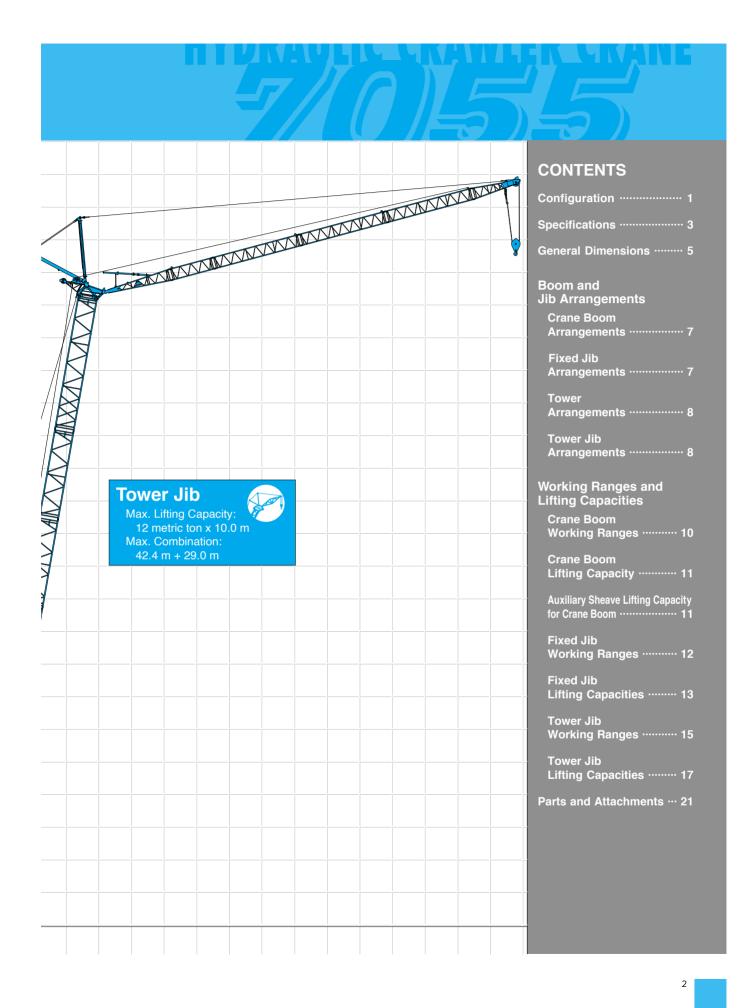

## SPECIFICATIONS



#### **Power Plant**

Model:Hino diesel engine J08E-TM Type:Water-cooled, direct fuel injection, with turbocharger Compiles with NRMM (Europe) Stage IIIA and US EPA Tier III.

Displacement: 7.684 liters

Rated Power: 159 kW at 2,000 min<sup>-1</sup> {rpm} (ISO)

Max. torque: 797 N·m/1,600 min-1

Cooling system: Liquid, recirculating bypass

Starter: 24 V/5.0 kW

Radiator: Corrugated type core, thermostatically controlled Air cleaner: Dry type with replaceable paper element

Throttle: Electric throttle control, twist grip type

Fuel filter: Replaceable paper element

Batteries: Two 12 V,136Ah/5HR capacity batteries, series connected.

Fuel tank capacity: 400 liters

#### Hydraulic System

Three variable displacement piston pumps are driven by heavyduty pump drive. Two of variable displacement pumps are used in the main hook hoist circuit, boom hoist circuit, auxiliary hook hoist circuit, third hoist circuit and each propel circuit. The other is used in the swing circuit.

**Control:** Full-flow hydraulic control system for infinitely variable pressure to front and rear drums, boom hoist brakes and clutches. Controls respond instantly to the touch, delivering smooth function operation.

Cooling: Oil-to-air heat exchanger (plate-fin type)

Filtration: Full-flow and bypass type with replaceable element **Electrical system:** All wiring corded for easy servicing, individual fused branch circuits.

#### Max. relief valve pressure:

Load hoist, boom hoist and propel system: 31.9 MPa {325 kgf/cm<sup>2</sup>} Swing system: 27.5 MPa {280 kgf/cm<sup>2</sup>} Control system: 7.0 MPa {71 kgf/cm<sup>2</sup>}

Reservoir capacity: 440 liters



#### **Boom Hoisting System**

Powered by a hydraulic motor through a planetary reducer. **Brake:** A spring-set, hydraulically released multiple-disc brake is mounted on the boom hoist motor and operated through a counter-balance valve.

Drum lock: External ratchet for locking drum.

Drum: Single drum, grooved for 16 mm dia. wire rope.

Line speed: Single line on first drum layer

Hoisting/Lowering: 70 to 2 m/min

#### Diameter of wire ropes

Boom guy line: 30 mm

**Boom hoist reeving:** 12 parts of 16 mm dia.high strength wire rope

Boom backstops: Telescopic type with spring bumper Required for all boom lengths



#### Load Hoist System

Front and rear drums for load hoist powered by a hydraulic variable plunger motors, driven through planetary reducers. **Brake:** A spring-set, hydraulically released multiple-disc brake is mounted on the hoist motor and operated through a counterbalance valve. Both positive and negative brake systems are available.

Drum lock: External ratchet for locking drum.

#### Drums:

#### Front drum:

550 mm P.C.D. x 545 mm Lg. wide drum, grooved for 22 mm wire rope. Rope capacity is 175 m working length and 335 m storage length.

#### Rear drum:

550 mm P.C.D. x 545 mm Lg. wide drum, grooved for 22 mm wire rope. Rope capacity is 125 m working length and 335 m storage length.

Note: Rope lengths listed above denote drum capacity and may differ from actual rope lengths supplied when machinery is shipped.

Line speed: Single line on the first drum layer

Hoisting/Lowering: 120 to 3 m/min

Tower Jib Hoisting/Lowering: 90 to 3 m/min(Rear drum) Line Pull:

Rated line pull (Single-line): 68.6 kN {7.0 tf}



### Swing System

Swing unit is powered by hydraulic motor driving spur gear through planetary reducer, the swing system provides 360° rotation.

Swing parking brakes: A spring-set, hydraulically released multiple-disc brake is mounted on swing motor.

**Swing circle:** Single-row ball bearing with an integral internally cut swing gear.

Swing lock: Manually, two position lock for transportation Swing speed: 4.0 min<sup>-1</sup> {rpm}

Upper Structure

## Torsion-free precision machined upper frame. All components are located clearly and service friendly. Engine with low noise level.

Counterweight: 15.2 ton

Additional counterweight: 3.3 ton

Note: Additional counterweight is required when raising or lowering the tower length of 42.4  $\ensuremath{\mathsf{m}}$ 





#### Cab & Control

Totally enclosed, full vision cab with safety glass, fully adjustable, high backed seat with a head-rest and armrests, and intermittent wiper and window washer (skylight and front window).

#### Cab fittings:

Air conditioner, convenient compartment (for tool), cup holder, ashtray, cigarette lighter, sun visor, roof blind, tinted glass, floor mat, foot-rest, shoe tray

#### Controls:

Four adjustable levers for front drum, rear drum, boom drum and swing controls



#### Lower Structure

Steel-welded carbody with axles. Crawler assemblies can be hydraulically extended for wide-track operation or retracted for transportation. Crawler belt tension is maintained by hydraulic jack force on the track-adjusting bearing block.

**Crawler drive:** Independent hydraulic propel drive is built into each crawler side frame. Each drive consists of a hydraulic motor propelling a driving tumbler through a planetary gear box. Hydraulic motor and gear box are built into the crawler side frame within the shoe width.

**Crawler brakes:** Spring-set, hydraulically released parking brakes are built into each propel drive.

**Steering mechanism:** A hydraulic propel system provides both skid steering (driving one track only) and counter-rotating steering (driving each track in opposite directions).

Track rollers: Sealed track rollers for maintenance-free operation.

Main Specifications	(Mode	el: 7055-3F)	
Crane Boom			
Max. Lifting Capacity		55 t/3.7 m	
Max. Length		51.8 m	
Fixed Jib			
Max. Lifting Capacity		7 t/16.0 m	
Max. Combination	42.7 m	+ 12.2 m, 39.6 m + 18.3 m	
Tower Jib			
Max. Lifting Capacity		12 t/10.0 m	
Max. Combination		42.4 m + 29.0 m	
Tower Angle	60° ~ 90°		
Main & Aux. Winch			
Max. Line Speed		120 m/min (1st layer)	
Rated Line Pull (Single Line)		68.6 kN {7.0 tf}	
Wire Rope Diameter	22 mm		
Wire Rope Length	Crane	175 m (Main) 125 m (Aux.)	
Whe hope Length	Tower	220 m (Main) 120 m (Aux.)	
Brake Type	Spring-set hydraulically released		
Working Speed			
Swing Speed	4.0 min <sup>-1</sup> {rpm}		
Travel Speed	2.4/1.5 km/h		

Shoes (flat): 59 shoes, 760 mm wide each crawler Max. travel speed: 2.4/1.5 km/h Max. gradeability: 40%



## Including upper and lower machine, 15.2 ton counterweight,

basic boom (or basic tower + basic tower jib), hook, and other

accessories. Specification Crane boom

WeightGround pressureApprox. 56.7 ton,72.3 kPa {0.74 kgf/cm²}

Approx. 60.6 ton, 77.3 kPa {0.79 kgf/cm<sup>2</sup>}



Tower jib

### Attachment

#### Boom and Jib:

Welded lattice construction using tubular, high-tensile steel chords with pin connections between sections.

Boom and Jib Length

	Min. Length	Max. Length		
	(Min. Combination)	(Max. Combination)		
Crane Boom	9.1 m	51.8 m		
Fixed Jib	30.5 m + 6.1 m	42.7 m + 12.2 m 39.6 m + 18.3 m		
Tower Jib	21.0 m + 16.8 m	42.4 m + 29.0 m		

Power Plant	
Model	Hino J08E-TM
Engine Output	159 kW/2,000 min <sup>-1</sup> {rpm}
Fuel Tank Capacity	400 liters
Hydraulic System	
Main Pumps	3 variable displacement
Max. Pressure	31.9 MPa {325 kgf/cm <sup>2</sup> }
Hydraulic Tank Capacity 440 liters	
Weight	
Operating Weight*	Approx. 56.7 t
Ground Pressure*	72.3 kPa {0.74 kgf/cm <sup>2</sup> }
Counterweight	15.2 t
Transport Weight**	40.2 t

\* Including upper and lower machine, 15.2 ton counterweight, basic boom, hook, and other accessories.


\*\* Base machine with boom base, crawlers, gantry, lower spreader, upper spreader, wire ropes for main and boom hoist winches.

Units are SI units. {} indicates conventional units.


## **GENERAL DIMENSIONS**

## **Crane Boom**

ļ

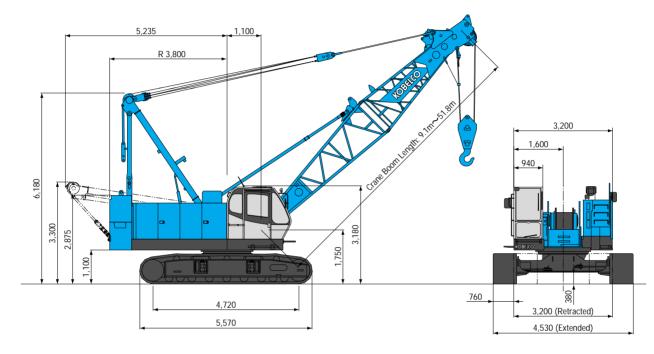

**Limit of Hook Lifting** 

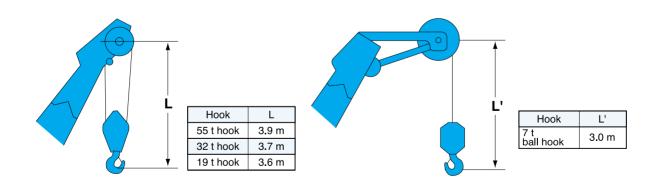

5


(Unit: mm)



## **Tower Jib**

Ŋ

(Unit: mm)

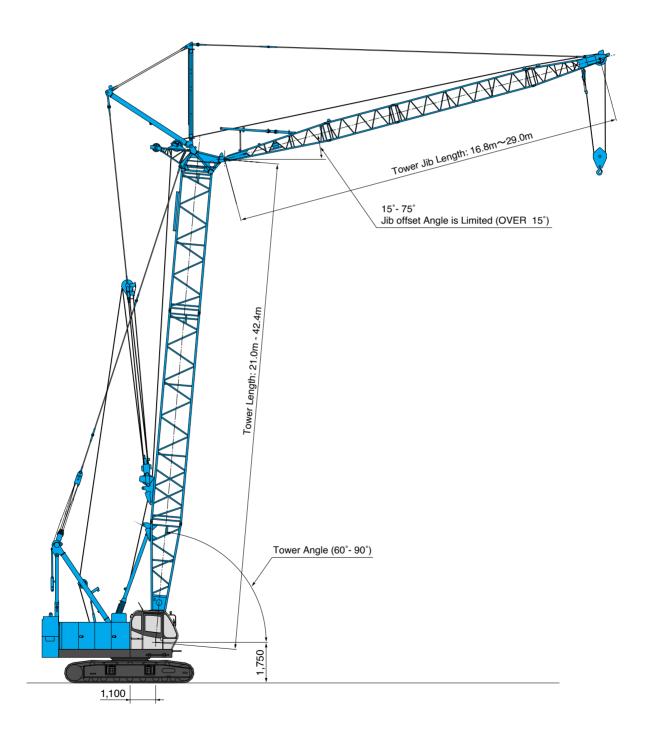

## **BOOM AND JIB ARRANGEMENTS**

## **Crane Boom Arrangements**

Boom length m (ft)	Boom arrangement
9.1 (30)	
12.2 (40)	× <u>B  10  </u> T → →
15.2 (50)	※ B  10  10 IT   B  20 IT
18.3 (60)	
21.3 (70)	B 10 10 20 F   B 10 30 F   B 20 20 F
24.4 (80)	B 10 20 17   B 20 30 17   B 10 10 30
27.4 (90)	% B 10 20 30 T   B 30 30 T   B 10 10 20 20
30.5 (100)	B     10     10     20A     30     T       B     20     20A     30     T     T       B     10     30A     30     T     T

Boom length m (ft)	Boom arrangement
33.5 (110)	# B 10 20 20A 30 T   B 20 30A 30 T
36.6 (120)	* E[10] 20 30A 30 F   • • • 30A 1 30 F   • • • • • • •   • • • • • • •   • • • • • • •   • • • • • • •   • • • • • • •   • • • • • • •   • • • • • • •   • • • • • • •   • • • • • • •   • • • • • • •
39.6 (130)	* •
42.7 (140)	% <u>B 10 20 20 30A</u> 30 T→ B 10 10 20 20 20A 30 T→
45.7 (150)	× ■ 10 10 20 20 30A 30 IT ■ 20 20 20 30A 30 IT T →
48.8 (160)	* B 10 20 20 20 30A 30 T
51.8 (170)	% ← B 10 10 20 20 20 30A 30 T

Symbol	Boom Length	Remarks	
В	5.2 m	Boom Base	
IJ	3.9 m	Boom Top	
10	3.0 m	Insert Boom	
20	6.1 m	Insert Boom	
20A	6.1 m	Insert Boom with Lug	
30	9.1 m	Insert Boom	
30A	9.1 m	Insert Boom with Lug	

- mark shows the guy line installing position when the fixed jib is used.

# mark shows the standard boom arrangement which enables each boom length of less than that boom length to be configured.

Note:In the following cases a 6.1 m or 9.1 m insert boom with lug is required: 1. With a fixed jib fitted

2. When assembling a boom length of 39.6 m or over without using an auxiliary crane

# Jib Guy Line: Ø20 mm Fixed Jib Boom Insert Boom with Lug

**Fixed Jib Arrangements** 

Crane boom length	Jib length m (ft)	Jib arrangement
30.5 m	6.1(20)	
42.7 m	12.2 (40)	B 20 T
30.5 m 2 39.6 m	18.3 (60)	B 20 20 T

Symbol	Jib Length	Remarks
B	3.0 m	Jib Base
	3.0 m	Jib Top
20	6.1 m	Insert Jib

(909) 222-0202



## **Tower Arrangements**

Tower length m (ft)	Tower arrangement
21.0 (69)	B 30B 20 T 52 0.6
24.1 (79)	% <u>B</u> 30B 10 20 T
27.1 (89)	B     30B     10     10     20     T       B     30B     20     20     T
30.2 (99)	B     30B     10     20     20     T       B     30B     20     30     T
33.2 (109)	B     30B     10     10     20     20     T       B     30B     10     20     30     T
36.3 (119)	B 30B 10 10 20 30   T B 30B 20 20 30
39.3 (129)	Ж <u>В 308 10 20 20 30</u> Т
42.4 (139)	Ж В 30В 10 10 20 20 30 Т

Symbol	Tower Length	Remarks	
В	5.2 m	Boom Base	
Т	0.6 m	Tower Cap	
10	3.0 m	Insert Boom	
20	6.1 m	Insert Boom	
30	9.1 m	Insert Boom	
	9.1 m	Special Insert Boom for Tower	

# mark shows the standard tower arrangement which enables each tower length of less than that tower length to be configured.

### Tower and Jib Combinations and Allowable Tower Angle

Jib length Tower length	16.8 m	19.8 m	22.9 m	25.9 m	29.0 m	Pillow plate	Add. weight*
21.0 m	90°-60°	90°-60°	-	-	-	—	×
24.1 m	90°-60°	90°-60°	90°-60°	-	-	-	×
27.1 m	90°-60°	90°-60°	90°-60°	90°-60°	-	-	×
30.2 m	90°-60°	90°-60°	90°-60°	90°-60°	90°-70°	-	×
33.2 m	90°-60°	90°-60°	90°-70°	90°-70°	90°-70°	-	×
36.3 m	90°-60°	90°-70°	90°-70°	90°-70°	90°-70°	-	×
39.3 m	90°-70°	90°-70°	90°-70°	90°-70°	90°-70°	Need	×
42.4 m	90°-70°	90°-70°	90°-70°	90°-70°	90°-75°	Need	Need
	0	0	0	0	0	$\geq$	
Dail HOUK	×	0	0	0	0		
ਤੁੱਤ 19 ton hook	Need	×	×	×	Х		
a <sup>®</sup> Ball hook	Х	Need	Х	Х	×		$\sim$
ta ton hook ± Ball hook 19 ton hook 19 ton hook	Need	0 0 ×	0 0 ×	00 ×	0 0 ×		

\*Add. weight: Additional weight for self-erection

## **Tower Jib Arrangements**

Jib length m (ft)	Jib arrangement
16.8 (55)	B 10 20 T 4.6 3.1
19.8 (65)	
22.9 (75)	* B 10 20 20 T
25.9 (85)	* <u>B<sup>1</sup>10</u> 10 <sup>1</sup> 20 <sup>1</sup> 20 <sup>1</sup> 7 B <sup>1</sup> 20 <sup>1</sup> 20 <sup>1</sup> 20 <sup>1</sup> 7
29.0 (95)	* B 10 20 20 T

Symbol	Tower Jib Length	Remarks
В	4.6 m	Tower Jib Base
T	3.1 m	Tower Jib Top
10	3.0 m	Tower Insert Jib
20	6.1 m	Tower Insert Jib

# mark shows the standard tower jib arrangement which enables each tower jib length of less than that jib length to be configured.

o mark indicates the cable roller install position.

○ : Available× : Not available



N N

#### Hook Blocks

A range of hook blocks can be specified, each with a safety latch.


Hooks	Maight (kg)	No. of			No. of li	nes and ma	x. rated loa	ds (tons)		
HOOKS	Weight (kg)	sheaves	1	2	3	4	5	6	7	8
55-ton	650	5	-	-	21.0	28.0	35.0	42.0	49.0	55.0
32-ton	500	2	-	-	21.0	28.0	32.0	-	-	-
19-ton	400	1	-	14.0	19.0	-	-	-	-	-
7-ton ball hook	160	0	7.0	-	-	-	-	-	-	-

#### Symbols for Attachments:



## WORKING RANGES AND LIFTING CAPACITIES

## **Crane Boom Working Ranges**

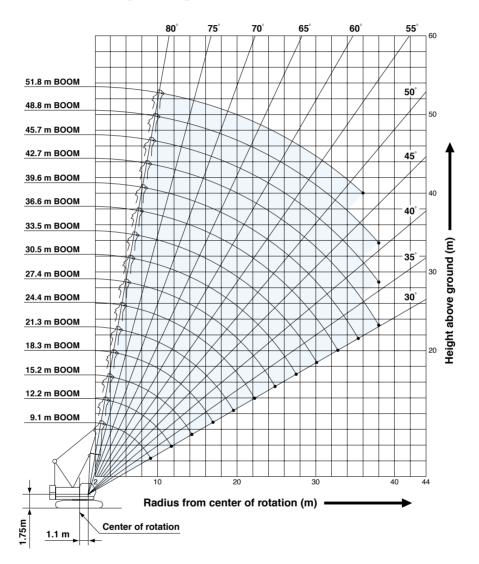

#### NOTES:

- 1. Ratings according to Japanese Construction Codes for Mobile Cranes and Japanese Safety Ordinance on Cranes, etc.
- 2. Ratings in metric tons for 360° working area.
- Operating radius is the horizontal distance from center of rotation to a vertical line through the center of gravity of the load.
- 4. Weight of hook block(s), slings and other load handling accessories is included in rated load. Their total weight must be subtracted from rated load to obtain weight that can be lifted.
- 5. Ratings shown are based on freely suspended loads and make no allowance for such factors as wind effect on lifted load, ground conditions out-of-level, operating speeds or any other condition that could be detrimental to the safe operation of this equipment. Operator, therefore, has the responsibility to judge the existing conditions and reduce lifted loads and operating speeds accordingly.
- 6. Ratings are for operation on a firm and level surface.
- 7. At radii and boom lengths where no ratings are shown on chart, operation is not intended nor approved.

- Boom inserts and guy lines must be arranged as shown in the "Operator's Manual".
- 9. Boom hoist reeving is 12 part line.
- 10. Gantry must be in raised position for all conditions.
- 11. Boom backstops are required for all boom lengths.
- 12. Crawler frames must be fully extended for all crane operations.
- Ratings shown in are determined by the strength of the boom or other structural component.
- 14. Instruction in the "Operator's Manual" must be strictly observed when operating the machine.
- 15. Crane boom ratings: Deduct weight of main hook block, slings, and all other load handling accessories from crane boom ratings shown.
- 16. Auxiliary sheave ratings for crane boom: Deduct weight of ball hook, slings, and all other load handling accessories from auxiliary sheave ratings for crane boom shown.
- 17. Crane boom lengths for auxiliary sheave mounting are 9.1 m to 48.8 m.
- Crane boom ratings with auxiliary sheave: Deduct 0.5 ton from crane boom ratings shown. Minimum rated loads must exceed 1.1 ton.



## **Crane Boom Lifting Capacity**

Unit: metric ton

Unit: metric ton

														Coun	terweig	pht: 15.2 t
Boom length Working (m) radius (m)	9.1	12.2	15.2	18.3	21.3	24.4	27.4	30.5	33.5	36.6	39.6	42.7	45.7	48.8	51.8	Boom length (m) Working radius (m)
3.0	55.0	3.5 m/55.0														3.0
3.7	55.0	55.0														3.7
4.0	50.7	50.7	50.7	4.5 m/44.3												4.0
5.0	38.5	38.4	38.3	38.3	37.7	5.6 m/31.6										5.0
6.0	28.7	28.6	28.5	28.5	28.4	28.4	6.1 m/27.6	6.6 m/24.2								6.0
7.0	22.8	22.7	22.6	22.6	22.5	22.4	22.4	22.3	7.2 m/21.3	7.7 m/19.2						7.0
8.0	18.9	18.8	18.6	18.6	18.5	18.5	18.4	18.4	18.3	18.2	8.2 m/17.4	8.7 m/15.8				8.0
9.0	16.1	15.9	15.8	15.8	15.7	15.6	15.6	15.5	15.4	15.4	15.3	15.2	9.3 m/13.2	9.8 m/13.2		9.0
10.0	9.1 m/15.9	13.8	13.7	13.6	13.5	13.5	13.4	13.4	13.3	13.2	13.1	13.1	13.0	12.9	10.3 m/11.8	10.0
12.0		11.7 m/11.2	10.7	10.7	10.6	10.5	10.4	10.4	10.3	10.2	10.1	10.0	10.0	9.9	9.8	12.0
14.0			8.8	8.7	8.6	8.5	8.4	8.4	8.3	8.2	8.1	8.0	8.0	7.9	7.8	14.0
16.0			14.4 m/8.5	7.3	7.2	7.1	7.0	7.0	6.9	6.8	6.7	6.6	6.5	6.5	6.3	16.0
18.0				17.0 m/6.8	6.2	6.1	6.0	5.9	5.8	5.7	5.6	5.5	5.5	5.4	5.3	18.0
20.0					19.7 m/5.4	5.3	5.2	5.1	5.0	4.9	4.8	4.7	4.6	4.5	4.4	20.0
22.0						4.6	4.5	4.4	4.3	4.2	4.1	4.0	3.9	3.9	3.7	22.0
24.0						22.3 m/4.5	4.0	3.9	3.8	3.7	3.6	3.5	3.4	3.3	3.2	24.0
26.0							24.9 m/3.8	3.4	3.3	3.2	3.1	3.0	2.9	2.8	2.7	26.0
28.0								27.6 m/3.1	3.0	2.9	2.8	2.7	2.6	2.5	2.4	28.0
30.0									2.6	2.5	2.4	2.3	2.2	2.1	2.0	30.0
32.0									30.2 m/2.5	2.3	2.2	2.1	2.0	1.9	1.8	32.0
34.0										32.9 m/2.1	1.9	1.8	1.7	1.6	1.5	34.0
36.0											35.5 m/1.7	1.5	1.4	1.3	1.1	36.0
38.0												1.3	1.2	1.1		38.0
Reeves	8	8	8	7	6	5	4	4	4	3	3	3	2	2	2	Reeves

Note:

Ratings according to Japanese Construction Codes for Mobile Cranes and Japanese Safety Ordinance on Cranes, etc. Ratings shown in \_\_\_\_\_\_are determined by the strength of the boom or other structural components. Refer to notes P10.

## Auxiliary Sheave Lifting Capacity for Crane Boom (With 19 t Main Hook)

(With	n 19	t M	lain	Hoo	ok)		-						Cour	iterweig	ht: 15.2 t
Boom length Working (m) radius (m)	9.1	12.2	15.2	18.3	21.3	24.4	27.4	30.5	33.5	36.6	39.6	42.7	45.7		Boom length (m) Working radius (m)
3.0	3.8 m/7.0														3.8
4.0	7.0	4.3 m/7.0	4.8 m/7.0												4.0
5.0	7.0	7.0	7.0	5.4 m/7.0	5.9 m/7.0										5.0
6.0	7.0	7.0	7.0	7.0	7.0	6.4 m/7.0	6.9 m/7.0								6.0
7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.5 m/7.0							7.0
8.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	8.5 m/7.0					8.0
9.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	9.1 m/7.0	9.6 m/7.0			9.0
10.0	9.1 m/7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	10.1 m/7.0	10.6 m/7.0	10.0
12.0		11.7 m/7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	12.0
14.0			7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	14.0
16.0			14.4 m/7.0	6.6	6.5	6.4	6.3	6.3	6.2	6.1	6.0	5.9	5.8	5.8	16.0
18.0				17.0 m/6.1	5.5	5.4	5.3	5.2	5.1	5.0	4.9	4.8	4.8	4.7	18.0
20.0					19.7 m/4.7	4.6	4.5	4.4	4.3	4.2	4.1	4.0	3.9	3.8	20.0
22.0						3.9	3.8	3.7	3.6	3.5	3.4	3.3	3.2	3.2	22.0
24.0						22.3 m/3.8	3.3	3.2	3.1	3.0	2.9	2.8	2.7	2.6	24.0
26.0							24.9 m/3.1	2.7	2.6	2.5	2.4	2.3	2.2	2.1	26.0
28.0								27.6 m/2.4	2.3	2.2	2.1	2.0	1.9	1.8	28.0
30.0									1.9	1.8	1.7	1.6	1.5	1.4	30.0
32.0									30.2 m/1.8	1.6	1.5	1.4	1.3	1.2	32.0
34.0										32.9 m/1.4	1.2	1.1			34.0
Reeves	1	1	1	1	1	1	1	1	1	1	1	1	1	1	Reeves

Note:


Ratings according to Japanese Construction Codes for Mobile Cranes and Japanese Safety Ordinance on Cranes, etc.

Ratings shown in \_\_\_\_\_\_ are determined by the strength of the boom or other structural components. Refer to notes P10.



## **Fixed Jib Working Ranges**

Jib Offset Angle: 10°, 30°

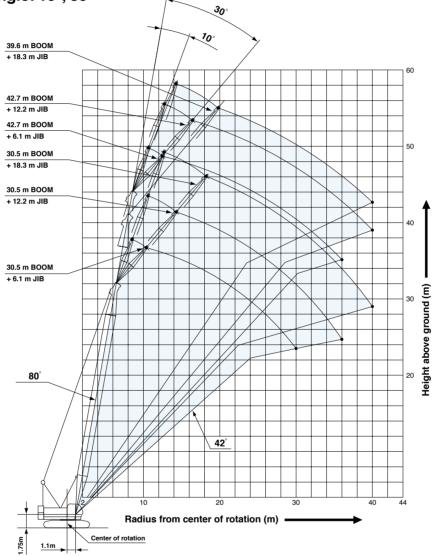

#### NOTES:

- 1. Ratings according to Japanese Construction Codes for Mobile Cranes and Japanese Safety Ordinance on Cranes, etc.
- 2. Ratings in metric tons for 360° working area.
- Operating radius is the horizontal distance from center of rotation to a vertical line through the center of gravity of the load.
- Weight of hook block(s), slings and other load handling accessories is included in rated load. Their total weight must be subtracted from rated load to obtain weight that can be lifted.
- 5. Ratings shown are based on freely suspended loads and make no allowance for such factors as wind effect on lifted load, ground conditions out-of-level, operating speeds or any other condition that could be detrimental to the safe operation of this equipment. Operator, therefore, has the responsibility to judge the existing conditions and reduce lifted loads and operating speeds accordingly.
- 6. Ratings are for operation on a firm and level surface.

- 7. At radii and boom lengths where no ratings are shown on chart, operation is not intended nor approved.
- 8. Boom/ jib inserts and guy lines must be arranged as shown in the "Operator's Manual".
- 9. Gantry must be in raised position for all conditions.
- 10. Boom backstops are required for all boom lengths.
- 11. Crawler frames must be fully extended for all crane operations.
- 12. The boom should be erected over the front of crawlers, not laterally.
- Ratings shown in \_\_\_\_\_ are determined by the strength of the boom or other structural component.
- 14. Instruction in the "Operator's Manual" must be strictly observed when operating the machine.
- 15. Fixed jib ratings: Deduct weight of jib hook block, slings, and all other load handling accessories from fixed jib ratings shown.
- 16. Crane boom lengths for fixed jib mounting are 30.5 m to 42.7 m.



### Fixed Jib Lifting Capacities (Without Main Hook) Jib Offset Angle: 10°

Unit: metric ton

JI	D UI	TSET	Angi	e: 10°										Counte	erweigh	t: 15.2 t
Boor	m length (m)		30.5			33.5			36.6			39.6		4:	2.7	Boom length (m
Jib	length (m)	6.1	12.2	18.3	6.1	12.2	18.3	6.1	12.2	18.3	6.1	12.2	18.3	6.1	12.2	Jib length (m)
	9.0	7.0			7.0											9.0
	10.0	7.0			7.0			7.0			7.0					10.0
	12.0	7.0	7.0	4.5	7.0	7.0		7.0	7.0		7.0			7.0		12.0
	14.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0	4.5	7.0	6.9	14.0
	16.0	6.9	7.0	4.5	6.8	7.0	4.5	6.7	7.0	4.5	6.6	6.9	4.5	6.6	6.5	16.0
_	18.0	6.0	6.2	4.5	5.9	6.1	4.5	5.8	6.1	4.5	5.7	6.0	4.5	5.6	5.9	18.0
Ē	20.0	5.1	5.3	4.5	5.0	5.2	4.5	4.9	5.2	4.5	4.8	5.1	4.5	4.7	5.0	20.0 Working
radius	22.0	4.4	4.6	4.5	4.3	4.5	4.5	4.2	4.4	4.5	4.1	4.3	4.4	4.0	4.3	22.0 g
5	24.0	3.8	4.0	4.1	3.7	3.9	4.0	3.7	3.9	3.9	3.5	3.8	3.8	3.5	3.7	24.0 adius
Workin	26.0	3.4	3.6	3.6	3.2	3.4	3.5	3.2	3.4	3.4	3.1	3.3	3.3	3.0	3.2	26.0
ž	28.0	3.0	3.1	3.2	2.8	3.0	3.1	2.8	3.0	3.0	2.7	2.8	2.9	2.5	2.8	28.0 E
	30.0	2.6	2.8	2.9	2.5	2.7	2.8	2.4	2.6	2.7	2.3	2.5	2.6	2.1	2.4	30.0
	32.0	2.3	2.5	2.6	2.2	2.4	2.5	2.1	2.3	2.4	1.9	2.2	2.3	1.8	2.0	32.0
	34.0		2.2	2.3	1.9	2.1	2.2	1.8	2.0	2.1	1.6	1.8	1.9	1.5	1.7	34.0
	36.0		2.0	2.1	1.6	1.8	1.9	1.5	1.7	1.8	1.3	1.6	1.7	1.2	1.4	36.0
	38.0		1.7	1.8		1.6	1.7	1.2	1.5	1.6	1.1	1.3	1.4		1.2	38.0
	40.0			1.6		1.4	1.5		1.2	1.4		1.1	1.2			40.0
R	eeves	1	1	1	1	1	1	1	1	1	1	1	1	1	1	Reeves

Note:

Ratings according to Japanese Construction Codes for Mobile Cranes and Japanese Safety Ordinance on Cranes, etc. Ratings shown in \_\_\_\_\_\_are determined by the strength of the boom or other structural components.

Refer to notes P12.

### Jib Offset Angle: 30°

Unit: metric ton

		1901	Aligi	0.00										Counte	erweigh	it: 15.2 t
Boor	n length (m)		30.5			33.5			36.6			39.6		42	2.7	Boom length (m
Jib	length (m)	6.1	12.2	18.3	6.1	12.2	18.3	6.1	12.2	18.3	6.1	12.2	18.3	6.1	12.2	Jib length (m)
	12.0	7.0			7.0			7.0			7.0					12.0
	14.0	7.0			7.0			7.0			7.0			6.8		14.0
	16.0	7.0	5.0		7.0	5.0		7.0	5.0		6.9	5.0		6.6		16.0
	18.0	6.2	5.0	3.2	6.1	5.0	3.2	6.0	5.0		5.9	5.0		5.9	4.6	18.0
	20.0	5.3	5.0	3.2	5.2	5.0	3.2	5.1	5.0	3.2	5.0	5.0	3.2	4.9	4.4	20.0
(m)	22.0	4.5	4.9	3.2	4.4	4.8	3.2	4.4	4.7	3.2	4.3	4.7	3.2	4.2	4.3	22.0 Vorking
radius	24.0	3.9	4.2	3.2	3.8	4.2	3.2	3.8	4.1	3.2	3.7	4.0	3.2	3.6	4.0	24.0
g ra	26.0	3.4	3.7	3.2	3.3	3.6	3.2	3.3	3.6	3.2	3.2	3.5	3.2	3.1	3.4	26.0 radius
Working	28.0	3.0	3.3	3.2	2.9	3.2	3.2	2.9	3.1	3.2	2.7	3.1	3.2	2.7	3.0	28.0 5
Wo	30.0	2.7	2.9	3.1	2.6	2.8	3.0	2.5	2.8	3.0	2.4	2.7	2.9	2.3	2.6	30.0 3
	32.0		2.6	2.8	2.2	2.5	2.7	2.2	2.4	2.6	2.0	2.3	2.5	1.9	2.3	32.0
	34.0		2.3	2.5		2.2	2.4	1.8	2.1	2.3	1.7	2.0	2.2	1.6	1.9	34.0
	36.0		2.0	2.2		1.9	2.1		1.9	2.1	1.4	1.7	2.0	1.3	1.6	36.0
	38.0			2.0		1.7	1.9		1.6	1.8	1.1	1.5	1.7		1.3	38.0
	40.0			1.8			1.7		1.3	1.6		1.2	1.4		1.1	40.0
R	eeves	1	1	1	1	1	1	1	1	1	1	1	1	1	1	Reeves

Note:


Ratings according to Japanese Construction Codes for Mobile Cranes and Japanese Safety Ordinance on Cranes, etc. Ratings shown in \_\_\_\_\_\_are determined by the strength of the boom or other structural components. Refer to notes P12.

R




## **Tower Jib Working Ranges**

Tower Length: 36.3 m

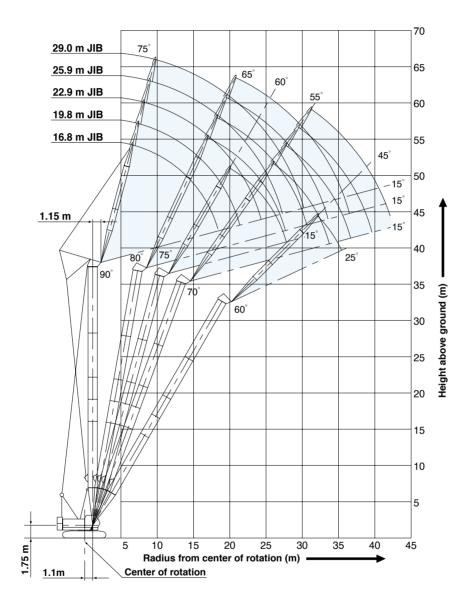

#### NOTES:


- 1. Ratings according to Japanese Construction Codes for Mobile Cranes and Japanese Safety Ordinance on Cranes, etc.
- 2. Ratings in metric tons for 360° working area.
- 3. Operating radius is the horizontal distance from center of rotation to a vertical line through the center of gravity of the load.
- 4. Weight of hook block(s), slings and other load handling accessories is included in rated load. Their total weight must be subtracted from rated load to obtain weight that can be lifted.
- Ratings shown are based on freely suspended loads and make no allowance for such factors as wind effect on lifted load, ground conditions
- out-of-level, operating speeds or any other condition that could be detri-

mental to the safe operation of this equipment. Operator, therefore, has the responsibility to judge the existing conditions and reduce lifted loads and operating speeds accordingly.

- 6. Ratings are for operation on a firm and level surface.
- 7. At radii and boom lengths where no ratings are shown on chart, operation is not intended nor approved.
- 8. Tower/tower jib inserts and guy lines must be arranged as shown in the "Operator's Manual".
- 9. Tower jib hoist reeving is 8 part line.
- 10. Gantry must be in raised position for all conditions.
- 11. Crawlers must be fully extended for all crane operations.



### Tower Length: 42.4 m

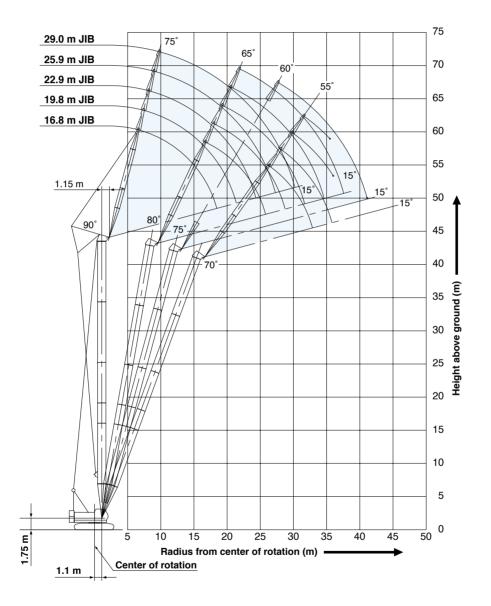

- 12. Tower and tower jib backstops are required for all tower and tower jib combinations.
- 13. Ratings shown in \_\_\_\_\_ are determined by the strength of the tower or other structural component.
- 14. With a 16.8 m tower jib, a 7-ton ball hook cannot be used.
- 15. When erecting and lowering the tower length of 39.3 m or over, the pillow plate for erection must be placed at the end of crawlers.
- 16. For the erection and dismantling of a 42.4 m tower, an additional weight for erection use (3.3 ton) must be used. Additional weight for self-erection should be removed during crane operation.
- 17. When using a 19-ton hook with a 16.8 m tower jib, or a 7-ton ball hook with a 19.8 m tower jib, attach a tower jib point weight (300 kg).
- 18. Instruction in the "Operator's Manual" must be strictly observed when operating the machine.
- Tower jib ratings: Deduct weight of hook block, slings, and all other load handling accessories from tower jib ratings shown.



## **Tower Jib Lifting Capacities**

Ν	Тои	er length (m)			21	.0			Tower length	(m)
21.0	Ji	b length (m)		16.8			19.8		Jib length (r	n)
m Tower Length	Т	ower angle	90°	<b>75</b> °	<b>60</b> °	90°	<b>75</b> °	<b>60</b> °	Tower angl	е
ſo		6.0	6.5 m/12.0						6.0	
/er		7.0	12.0			7.3 m/12.0			7.0	
Lei		8.0	12.0			12.0			8.0	
ngt		9.0	12.0			12.0			9.0	
μ	-	10.0	12.0			11.8			10.0	<
	Radius (m)	12.0	10.7			10.5			12.0	Working
	diu	14.0	9.6	15.9 m/7.4		9.4			14.0	ing
	Ва	16.0	8.2	7.3		8.1	17.5 m/6.5		16.0	Rad
	Working	18.0	6.2	6.4		7.1	6.3		18.0	Radius
	Vor	20.0	18.3 m/5.5	5.6		5.9	5.5		20.0	Ē
	-	22.0		5.0		21.3 m/4.6	4.9		22.0	
		24.0		23.7 m/4.5	24.4 m/3.8		4.4		24.0	
		26.0			3.5		4.0	26.5 m/3.3	26.0	
		28.0			3.2		26.7 m/3.8	3.1	28.0	
		30.0			28.7 m/3.1			2.8	30.0	
		32.0						31.6 m/2.6	32.0	
		Reeves		2			2		Reeves	

N	Tow	/er length (m)					24.1					Tower length	(m)
24.1	Ji	b length (m)		16.8			19.8			22.9		Jib length (r	m)
m Tower Length	Т	ower angle	90°	75°	60°	90°	75°	60°	90°	75°	60°	Tower angl	е
ſø		6.0	6.5 m/12.0									6.0	
/er		7.0	12.0			7.3 m/12.0						7.0	
Lei		8.0	12.0			12.0			8.1 m/11.5			8.0	
ŋgt		9.0	12.0			12.0			11.2			9.0	
5		10.0	12.0			11.8			11.0			10.0	
		12.0	10.7			10.5			10.3			12.0	
	(r	14.0	9.6			9.4			9.2			14.0	5
	s (n	16.0	8.2	16.7 m/6.7		8.1			8.1			16.0	ork
	Working Radius (m)	18.0	6.2	6.2		7.2	18.3 m/6.0		7.2	19.8 m/5.3		18.0	Working Radius (m)
	g Re	20.0	18.3 m/5.5	5.4		5.9	5.3		6.3	5.3		20.0	Rac
	king	22.0		4.8		21.3 m/4.6	4.7		5.3	4.7		22.0	lius
	Wor	24.0		4.3	25.9 m/3.3		4.3		4.1	4.2		24.0	Ē
		26.0		24.6 m/4.2	3.2		3.8		24.2 m/3.9	3.8		26.0	
		28.0			2.9		27.5 m/3.6	28.1 m/2.8		3.5		28.0	
		30.0			2.7			2.6		3.2	30.2 m/2.5	30.0	
		32.0			30.3 m/2.7			2.4		30.4 m/3.1	2.3	32.0	
		34.0						33.2 m/2.3			2.1	34.0	
		36.0									2.0	36.0	
		38.0									36.2 m/2.0	38.0	
		Reeves		2			2			2		Reeves	

Note:

Ratings according to Japanese Construction Codes for Mobile Cranes and Japanese Safety Ordinance on Cranes, etc. Ratings shown in \_\_\_\_\_\_ are determined by the strength of the tower or other structural components. Refer to notes P15 and P16.





#### Unit: metric ton Counterweight: 15.2 t

То	wer length (m)						27	7.1						Tower length	(m)
J	lib length (m)		16.8			19.8			22.9			25.9		Jib length (r	m)
	Tower angle	90°	<b>75</b> °	60°	90°	75°	60°	90°	75°	<b>60</b> °	90°	<b>75</b> °	<b>60</b> °	Tower angl	le
	6.0	6.5 m/12.0												6.0	
	7.0	12.0			7.3 m/12.0									7.0	]
	8.0	12.0			12.0			8.1 m/11.5			8.9 m/8.6			8.0	]
	9.0	12.0			12.0			11.2			8.6			9.0	]
	10.0	12.0			11.8			11.0			8.4			10.0	]
	12.0	10.7			10.4			10.3			8.2			12.0	1
	14.0	9.5			9.3			9.2			7.7			14.0	1
Ê	16.0	8.2	17.5 m/6.2		8.1			8.1			7.1			16.0	1
) sn	18.0	6.2	6.0		7.2	19.0 m/5.5		7.2			6.5			18.0	1
Working Radius (m)	20.0	18.3 m/5.5	5.3		5.9	5.2		6.3	20.6 m/4.9		5.9			20.0	WORKING HADIUS (III)
E BC	22.0		4.7		21.3 m/4.6	4.6		5.3	4.5		5.3	22.1 m/4.4		22.0	
ŗ,	24.0		4.2			4.1		4.1	4.0		4.7	4.0		24.0	5
×	26.0		25.3 m/3.9	27.4 m/2.8		3.7		24.2 m/3.9	3.7		4.0	3.6		26.0	]3
	28.0			2.7		3.4	29.6 m/2.4		3.3		27.2 m/3.3	3.2		28.0	1
	30.0			2.5		28.3 m/3.3	2.3		3.0	31.7 m/2.1		3.0		30.0	1
	32.0			31.8 m/2.3			2.1		31.2 m/2.9	2.0		2.7	33.9 m/1.7	32.0	1
	34.0						1.9			1.9		2.5	1.7	34.0	1
	36.0						34.7 m/1.9			1.7		34.2 m/2.5	1.6	36.0	1
	38.0									37.6 m/1.6			1.4	38.0	1
	40.0												1.3	40.0	1
	42.0												40.6 m/1.3	42.0	1
	Reeves		2			2			2			2		Reeves	1

ω	Tow	ver length (m)								30.2								Tower length	(m)
30.2	Ji	b length (m)		16.8			19.8			22.9			25.9			29.0		Jib length (	m)
m Tower Length	Т	ower angle	90°	75°	60°	90°	75°	60°	90°	75°	60°	90°	75°	60°	90°	80°	<b>70</b> °	Tower ang	le
<b>O</b> W		6.0	6.5 m/12.0															6.0	
/er		7.0	12.0			7.3 m/12.0												7.0	
Lei		8.0	12.0			12.0			8.1 m/11.5			8.9 m/8.6						8.0	
ngt		9.0	12.0			12.0			11.2			8.6			9.7 m/6.2			9.0	
5		10.0	12.0			11.8			11.0			8.4			6.2			10.0	
		12.0	10.6			10.4			10.3			8.2			6.2			12.0	
		14.0	9.5			9.3			9.2			7.7			6.0			14.0	
	Ê	16.0	8.2			8.1			8.1			7.1			5.6			16.0	×
	Working Radius (m)	18.0	6.2	18.3 m/5.7		7.2	19.8 m/5.0		7.2			6.4			5.1	19.6 m/5.4		18.0	Working Radius (m)
	adi	20.0	18.3 m/5.5	5.1		5.9	5.0		6.3	21.4 m/4.5		5.9			4.6	5.2		20.0	Ъ
	Ē	22.0		4.5		21.3 m/4.6	4.4		5.3	4.4		5.3	22.9 m/4.0		4.2	4.6		22.0	ladi
	rki	24.0		4.0			4.0		4.1	3.9		4.7	3.8		3.8	4.1		24.0	) su
	š	26.0		3.7			3.6		24.2 m/3.9	3.5		4.0	3.4		3.5	3.7		26.0	3
		28.0		26.1 m/3.6	28.9 m/2.3		3.2			3.2		27.2 m/3.3	3.1		3.2	3.4	29.0 m/2.6	28.0	
		30.0			2.2		29.1 m/3.1	31.1 m/1.9		2.9			2.8		2.8	3.1	2.5	30.0	
		32.0			2.0			1.8		2.7	33.3 m/1.6		2.6		30.1 m/2.8	2.8	2.3	32.0	
		34.0			33.3 m/1.8			1.7			1.6		2.4	35.4 m/1.3		2.6	2.0	34.0	
		36.0						1.5			1.4		34.9 m/2.3	1.3		35.3 m/2.5	1.9	36.0	
		38.0						36.2 m/1.5			1.3			1.2			1.7	38.0	
		40.0									39.2 m/1.2			1.1			1.6	40.0	
		42.0															40.4 m/1.5	42.0	
		Reeves		2			2			2			2			1		Reeves	

Note:

Ratings according to Japanese Construction Codes for Mobile Cranes and Japanese Safety Ordinance on Cranes, etc. Ratings shown in \_\_\_\_\_\_ are determined by the strength of the tower or other structural components. Refer to notes P15 and P16.

Unit: metric ton Counterweight: 15.2 t

To	wer length (m)								33.2								Tower lengt	h (m
6.5	ib length (m)		16.8		1	19.8		1	22.9			25.9			29.0		Jib length	
		90°	75°	60°	90°	75°	60°	90°	22.9 80°	<b>70</b> °	90°	25.9 80°	<b>70</b> °	90°	29.0 80°	700	-	
m Tower Length	Tower angle		75⁺	6U-	90*	75*	6U-	90-	80*	70*	90*	80-	70⁼	90°	80°	<b>70</b> °	Tower an	gie
DWe	6.0	6.5 m/12.0															6.0	_
9r L	7.0	12.0			7.3 m/12.0												7.0	
en	8.0	12.0			12.0			8.1 m/11.5			8.9 m/8.6						8.0	_
lgt	9.0	12.0			12.0			11.2			8.6			9.7 m/6.2			9.0	
_	10.0	12.0			11.8			11.0			8.3			6.2			10.0	
	12.0	10.6			10.4			10.3			8.0			6.2			12.0	
	14.0	9.5			9.3			9.2			7.7			6.0			14.0	
Ê	16.0	8.2			8.1			8.1	17.6 m/6.2		7.1			5.6			16.0	1
I) ST	18.0	6.2	19.1 m/5.2		7.2			7.2	6.0		6.4	18.9 m/5.5		5.1			18.0	- F
Working Radius (m)	20.0	18.3 m/5.5	4.9		5.9	20.6 m/4.6		6.3	5.2		5.8	5.1		4.6	20.1 m/5.0		20.0	Working Radius (m)
g B	22.0		4.3		21.3 m/4.6	4.2		5.3	4.7		5.3	4.6		4.2	4.5		22.0	Rad
kin	24.0		3.9			3.8		4.1	4.2		4.7	4.1		3.8	4.0		24.0	s I
Wo	26.0		3.5			3.4		24.2 m/3.9	3.8	26.6 m/2.9	4.0	3.7		3.5	3.6		26.0	Ē
	28.0		26.9 m/3.3			3.1			3.4	2.7	27.2 m/3.3	3.3	28.3 m/2.5	3.1	3.3		28.0	
	30.0			30.5 m/1.8		29.8 m/2.8			3.1	2.4		3.1	2.3	2.8	3.0	30.1 m/2.2	30.0	
	32.0			1.6			32.6 m/1.4			2.2		2.8	2.1	30.1 m/2.8	2.7	2.0	32.0	
	34.0			1.5			1.3			2.0		32.9 m/2.7	1.9		2.5	1.8	34.0	
	36.0			34.8 m/1.4			1.2			35.5 m/1.9			1.7		35.9 m/2.3	1.6	36.0	
	38.0						37.7 m/1.1						1.6			1.5	38.0	
	40.0												38.5 m/1.5			1.4	40.0	
	42.0															41.4 m/1.3	42.0	
	Reeves		2			2			2			2			1		Reeves	

Tov	ver length (m)								36.3								Tower length	(m)
J	ib length (m)		16.8			19.8			22.9			25.9			29.0		Jib length (	(m)
1	Fower angle	90°	75°	<b>60</b> °	90°	<b>80</b> °	<b>70</b> °	90°	<b>80</b> °	<b>70</b> °	90°	80°	<b>70</b> °	90°	<b>80</b> °	<b>70</b> °	Tower ang	le
	6.0	6.5 m/12.0															6.0	
	7.0	12.0			7.3 m/11.4												7.0	
	8.0	12.0			11.4			8.1 m/10.1			8.9 m/8.6						8.0	
	9.0	12.0			11.4			10.1			8.5			9.7 m/6.2			9.0	
	10.0	12.0			11.4			10.1			8.3			6.2			10.0	
	12.0	10.6			10.4			10.1			8.0			6.2			12.0	
	14.0	9.5			9.3			9.2			7.7			6.0			14.0	
Ê	16.0	8.2			8.1	16.8 m/6.4		8.1			7.1			5.6			16.0	ş
Working Radius (m)	18.0	6.2	19.9 m/4.7		7.2	5.9		7.2	18.1 m/5.8		6.4	19.4 m/5.2		5.1			18.0	Working Radius (m)
adi	20.0	18.3 m/5.5	4.7		5.9	5.2		6.3	5.1		5.8	5.0		4.6	20.7 m/4.4		20.0	ng F
E B	22.0		4.1		21.3 m/4.6	4.6		5.3	4.5		5.3	4.4		4.2	4.4		22.0	adi
rki –	24.0		3.7			4.1	25.9 m/2.8	4.1	4.1		4.7	4.0		3.8	3.9		24.0	su
Ň	26.0		3.4			3.7	2.8	24.2 m/3.9	3.7	27.6 m/2.5	3.9	3.6		3.5	3.5		26.0	Ξ
	28.0		27.7 m/3.1			27.6 m/3.4	2.5		3.3	2.4	27.2 m/3.3	3.2	29.4 m/2.1	3.1	3.2		28.0	
	30.0						2.3		3.0	2.2		3.0	2.1	2.8	2.9	31.1 m/1.9	30.0	
	32.0			1.3			2.1		30.5 m/3.0	2.0		2.7	1.9	30.1 m/2.8	2.7	1.8	32.0	
	34.0			1.2			33.6 m/1.9			1.8		33.5 m/2.5	1.7		2.4	1.6	34.0	
	36.0			35.3 m/1.1						1.6			1.5		2.3	1.4	36.0	1
	38.0									36.6 m/1.6			1.4		36.4 m/2.2	1.3	38.0	1
	40.0												39.5 m/1.3			1.2	40.0	1
	42.0															1.1	42.0	1
	Reeves		2			2			2	-		2			1	•	Reeves	

Note:

Ratings according to Japanese Construction Codes for Mobile Cranes and Japanese Safety Ordinance on Cranes, etc. Ratings shown in \_\_\_\_\_\_ are determined by the strength of the tower or other structural components. Refer to notes P15 and P16.



#### Unit: metric ton Counterweight: 15.2 t

ωT	ower length (m)								39.3								Tower length	n (m)
39.3	Jib length (m)		16.8			19.8			22.9			25.9			29.0		Jib length	(m)
3	Tower angle	90°	<b>80</b> °	<b>70</b> °	90°	<b>80</b> °	<b>70</b> °	90°	<b>80</b> °	<b>70</b> °	90°	<b>80</b> °	<b>70</b> °	90°	80°	<b>70</b> °	Tower ang	gle
Ō	6.0	6.5 m/11.4															6.0	
/er	7.0	11.4			7.3 m/9.5												7.0	
m Tower Length	8.0	11.4			9.5			8.1 m/8.1			8.9 m/6.7						8.0	
ngt	9.0	11.4			9.5			8.1			6.7			9.7 m/6.2			9.0	
h	10.0	11.0			9.5			8.1			6.7			6.2			10.0	
	12.0	10.4			9.5			8.1			6.7			6.2			12.0	
	14.0	9.5			9.2			8.1			6.7			6.0			14.0	
3	16.0	8.2	6.7		8.1	17.3 m/6.0		8.1			6.7			5.6			16.0	٧
	16.0 18.0 20.0	6.2	5.8		7.2	5.7		7.2	18.6 m/5.4		6.4	19.9 m/4.9		5.0			18.0	Working Radius (m)
	20.0	18.3 m/5.5	5.1		5.9	5.0		6.3	4.9		5.8	4.8		4.6	21.2 m/4.4		20.0	g R
	P 22.0		4.5		21.3 m/4.6	4.4		5.3	4.4		5.3	4.3		4.2	4.2		22.0	adiu
	22.0 24.0 26.0		4.1	25.1 m/2.8		4.0		4.1	3.9		4.7	3.8		3.8	3.8		24.0	I) SI
	≥ 26.0		25.1 m/3.8	2.6		3.6	26.9 m/2.4	242 m/3.9	3.5		3.9	3.5		3.4	3.4		26.0	Ę
	28.0			2.4		3.3	2.2		3.2	28.6 m/2.1	27.2 m/3.3	3.1		3.1	3.1		28.0	
	30.0			2.1		28.1 m/3.2	2.0		2.9	1.9		2.9	30.4 m/1.7	2.8	2.8		30.0	
	32.0			31.7 m/1.9			1.8		31.0 m/2.8	1.7		2.6	1.6	30.1 m/2.8	2.6	32.1 m/1.5	32.0	
	34.0						1.6			1.6		2.4	1.4		2.3	1.3	34.0	
	36.0						34.7 m/1.6			1.4			1.3		2.2	1.2	36.0	
	38.0									37.6 m/1.3			1.1		36.9 m/2.1	1.1	38.0	
	40.0												39.0 m/1.1				40.0	
	Reeves		2			2			2			1			1		Reeves	

4	Tow	ver length (m)								42.4								Tower length	(m)
42.4	Ji	b length (m)		16.8			19.8			22.9			25.9			29.0		Jib length (	(m)
m Tower Length	Т	ower angle	<b>90</b> °	<b>80</b> °	<b>70</b> °	90°	80°	<b>70</b> °	90°	<b>80</b> °	<b>70</b> °	90°	80°	<b>70</b> °	90°	<b>80</b> °	75°	Tower ang	le
ſ		6.0	6.5 m/9.9															6.0	
er		7.0	9.9			7.3 m/8.2												7.0	
Ler	[	8.0	9.9			8.2			8.1 m/7.7			8.9 m/6.5						8.0	
ŋgt		9.0	9.9			8.2			7.7			6.5			9.7 m/6.0			9.0	
3		10.0	9.9			8.2			7.7			6.5			6.0			10.0	
		12.0	9.0			8.2			7.7			6.5			6.0			12.0	
		14.0	8.2			7.9			7.7			6.4			6.0			14.0	
	Ê	16.0	7.3	16.6 m/6.2		7.5	17.9 m/5.6		7.4			6.3			5.6			16.0	ş
	Working Radius (m)	18.0	6.2	5.7		6.8	5.5		7.2	19.2 m/5.1		6.2			5.0			18.0	Working Radius
	adi	20.0	18.3 m/5.5	5.0		5.8	4.9		6.3	4.8		5.8	20.4 m/4.6		4.6	21.7 m/4.1		20.0	lg F
	ē	22.0		4.4		21.3 m/4.6	4.3		5.2	4.2		5.3	4.1		4.1	4.1		22.0	adi
	ž	24.0		3.9			3.9		4.1	3.8		4.7	3.7		3.8	3.6		24.0	us (
	š	26.0		25.7 m/3.6	26.2 m/2.3		3.5	27.9 m/1.9	24.2 m/3.9	3.4		3.9	3.3		3.4	3.3	27.6 m/2.4	26.0	Ē
		28.0			2.1		3.2	1.9		3.1	29.7 m/1.7	27.2 m/3.3	3.0		3.1	3.0	2.3	28.0	
		30.0			1.9		28.6 m/3.1	1.7		2.8	1.6		2.8	31.4 m/1.4	2.8	2.7	2.1	30.0	
		32.0			1.7			1.6		31.6 m/2.6	1.5		2.5	1.3	30.1 m/2.8	2.5	1.9	32.0	
		34.0			32.8 m/1.6			1.4			1.3		2.3	1.2		2.3	1.7	34.0	
		36.0						35.7 m/1.3			1.2		34.5 m/2.3	35.5 m/1.1		2.1	1.5	36.0	
		38.0									1.1					37.5 m/2.0	1.4	38.0	
		40.0															1.2	40.0	
		42.0															41.1 m/1.2	42.0	
		Reeves		2			2			2			1			1		Reeves	

#### Note:


Ratings according to Japanese Construction Codes for Mobile Cranes and Japanese Safety Ordinance on Cranes, etc. Ratings shown in \_\_\_\_\_\_ are determined by the strength of the tower or other structural components.

Refer to notes P15 and P16.


## PARTS AND ATTACHMENTS

#### Base Machine

With boom base, crawlers, gantry, lower spreader, upper spreader, and wire rope for main & boom hoist winches Weight: 40,200 kg Width: 3,200 mm




Crawler Weight: 6,500 kg




Counterweight A Weight: 7,510 kg





Counterweight B Weight: 7,730 kg

985



## Insert Boom


L



32	20
52	20
73	30
	7:


#### Boom Base

Weight: 980 kg




#### Boom Top

Weight: 1,070 kg (with boom guy cables)




#### 9.1 m Special Insert Boom for Tower

Weight: 1,190 kg (with boom guy cables)



Tower Cap Weight: 600 kg







Jib Base (For Crane) Weight: 125 kg




**Tower Jib Base** Weight: 400 kg



Jib Top (For Crane) Weight: 145 kg



Insert Tower Jib




	L (mm)	Weight (kg)
3.0 m	3,120	115
6.1 m	6,170	195

**Tower Jib Top** Weight: 245 kg



Tower Jib strut Weight: 760 kg



### **Other Attachments**

Attachments	Weight	Dimensions (L x W x H)				
6.1 m insert boom with lug	540 kg (with guy cables)	6,190 mm x 1,350 mm x 1,500 mm				
9.1 m insert boom with lug	750 kg (with guy cables)	9,240 mm x 1,350 mm x 1,500 mm				
6.1 m insert jib (for crane)	140 kg	6,160 mm x 675 mm x 625 mm				
Jib strut (for crane)	190 kg	3,700 mm x 670 mm x 500 mm				
Auxiliary sheave	140 kg	1,325 mm x 540 mm x 1,285 mm				
Upper spreader for boom hoist	280 kg	1,460 mm x 300 mm x 630 mm				
Upper spreader for tower jib	225 kg	640 mm x 610 mm x 775 mm				
Lower spreader for tower jib	335 kg	1,350 mm x 450 mm x 930 mm				
55-ton hook	650 kg	590 mm x 435 mm x 1,470 mm				
32-ton hook	500 kg	590 mm x 330 mm x 1,530 mm				
19-ton hook	400 kg	590 mm x 385 mm x 1,270 mm				
7-ton ball hook	160 kg	ø 300 mm x 815 mm				

Note: Estimated weights may vary ± 2%.



#### Standard Equipment

		tructure

Counterweight: 15.2 ton (total weight) 760 mm shoe crawlers Batteries (2-12V, 136 Ah/5 HR) Gantry raising/lowering cylinder Electric hand throttle grip Variable boom hoist speed controller Variable main/aux. hoist speed controller Swing neutral-free/brake select switch Side deck for cab Steps (crawlers) Two front working lights Two rear view mirrors Tools (for routine maintenance) Cable roller (for boom) Upper spreader storage guide

#### Safety Device

Load Moment Indicator (with boom lowering slow stop function) LMI release key (for hook over-hoist prevention device and boom over-hoist prevention device) LCD multi display Ultimate stop function for boom over-hoist Function lock lever Propel lever lock Mechanical drum lock pawl (main, aux. and boom hoist) Signal horn Swing parking brake Mechanical swing lock pin (two positions) Swing flashers/warning buzzer

#### **Cab Control**

Air conditioner Luggage box Cup holder Ashtray Cigar lighter Intermittent wiper & window washer (skylight and front window) Sun visor Roof blind Floor mat (cloth) Foot rest Shoe tray

#### Bigge Crane and Rigging Co.

10700 Bigge Avenue San Leandro, CA 94577 Phone: (888) 337-BIGGE or (510) 638-8100 Fax: (510) 639-4053 Email: info@bigge.com Web site: www.bigge.com

**Note:** Due to our policy of continual product improvements all designs and specifications are subject to change without advance notice. Copyright by KOBELCO CRANES CO., LTD. No part of this catalog may be reproduced in any manner without notice.

#### KOBELCO CRANES CO., LTD.

17-1, Higashigotanda 2-chome, Shinagawa-ku, Tokyo 141-8626 JAPAN Tel: +81-3-5789-2130 Fax: +81-3-5789-3372 Inquiries To:

**KOBELCO** is the corporate mark used by Kobe Steel on a variety of products and in the names of a number of Kobe Steel Group companies.

Bulletin No. 7055-3FSPEC-AO1 060901IF Printed in Japan

260 North Smith Ave. Corona, CA 92880