


# LINDEN COMANSA

**LINDEN 1100**

**11 LC 132**


**11,020 lbs.**

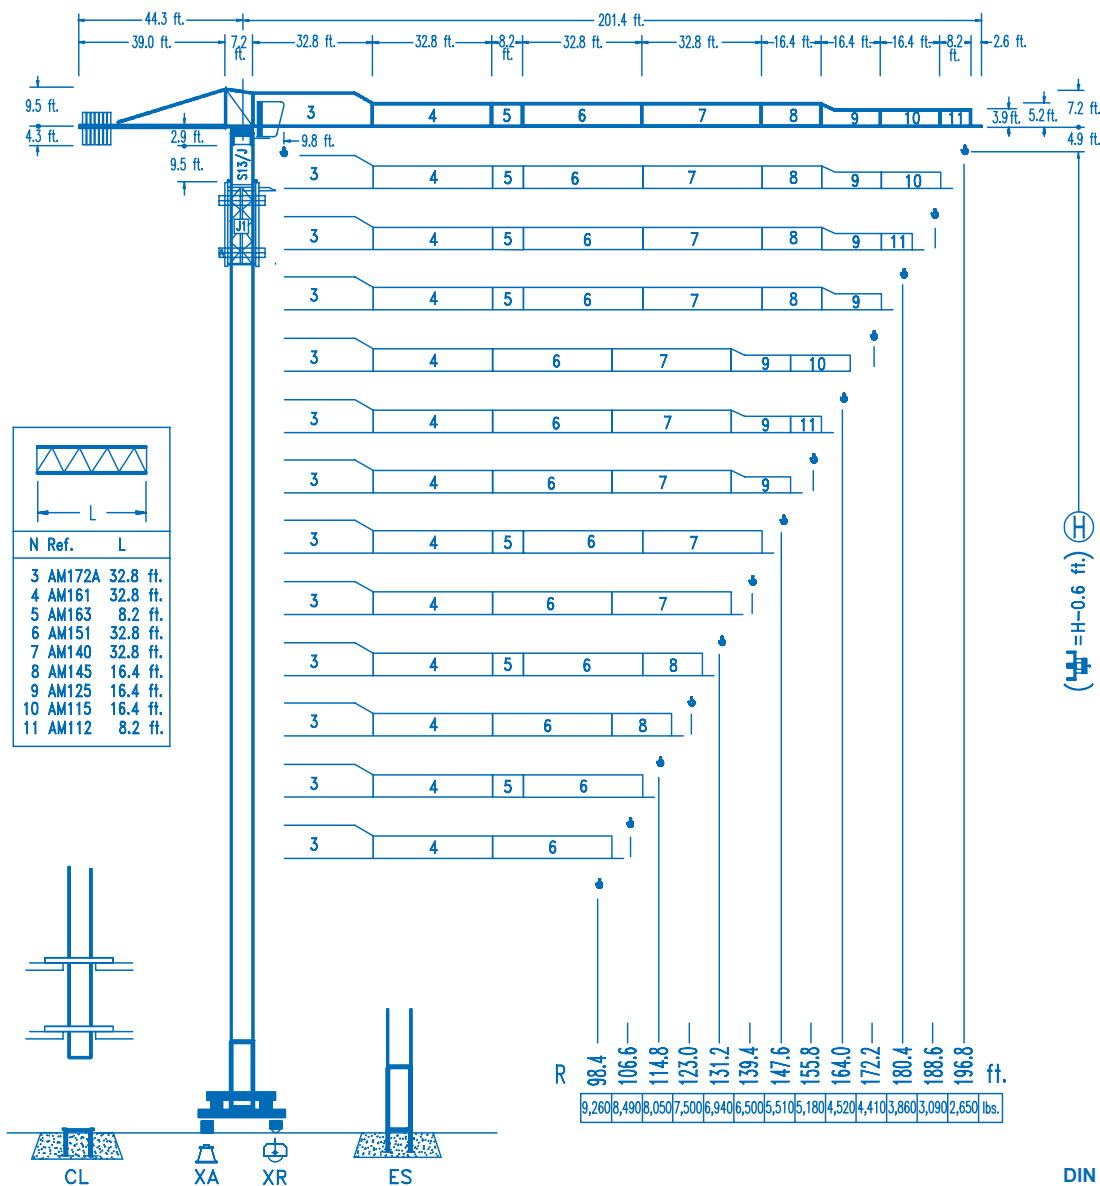

(H) = H - 0.6 ft.

**CE**  
DIN 15018 H1 B3


| R     | CL     |        |       |       |       |       |       |       |       |       |       | ES    |       |       |       |       |       |       |      |  |  |  |
|-------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|--|--|--|
| 196.8 | 55.8   | 65.6   | 72.2  | 85.3  | 91.9  | 96.1  | 108.9 | 114.8 | 123.0 | 131.2 | 139.4 | 147.6 | 155.8 | 164.0 | 172.2 | 180.4 | 188.6 | 196.8 | ft.  |  |  |  |
|       | 11,020 | 9,020  | 8,000 | 6,460 | 5,840 | 5,510 | 5,510 | 5,180 | 4,760 | 4,410 | 4,100 | 3,810 | 3,570 | 3,350 | 3,150 | 2,950 | 2,800 | 2,650 | lbs. |  |  |  |
| 188.6 | 59.7   | 65.6   | 72.2  | 85.3  | 91.9  | 98.4  | 103.3 | 117.5 | 123.0 | 131.2 | 139.4 | 147.6 | 155.8 | 164.0 | 172.2 | 180.4 | 188.6 | ft.   |      |  |  |  |
|       | 11,020 | 9,830  | 8,750 | 7,080 | 6,440 | 5,890 | 5,510 | 5,510 | 5,200 | 4,830 | 4,500 | 4,190 | 3,920 | 3,680 | 3,460 | 3,260 | 3,090 | lbs.  |      |  |  |  |
| 180.4 | 67.9   | 72.2   | 85.3  | 91.9  | 98.4  | 105.0 | 114.8 | 117.5 | 133.9 | 139.4 | 147.6 | 155.8 | 164.0 | 172.2 | 180.4 | ft.   |       |       |      |  |  |  |
|       | 11,020 | 10,230 | 8,330 | 7,610 | 6,970 | 6,390 | 5,690 | 5,510 | 5,510 | 5,270 | 4,920 | 4,610 | 4,340 | 4,080 | 3,860 | lbs.  |       |       |      |  |  |  |
| 172.2 | 70.2   | 85.3   | 91.9  | 98.4  | 105.0 | 114.8 | 121.4 | 125.0 | 142.7 | 147.6 | 155.8 | 164.0 | 172.2 | ft.   |       |       |       |       |      |  |  |  |
|       | 11,020 | 8,990  | 8,200 | 7,520 | 6,920 | 6,170 | 5,730 | 5,510 | 5,510 | 5,290 | 4,960 | 4,670 | 4,410 | lbs.  |       |       |       |       |      |  |  |  |
| 164.0 | 74.5   | 85.3   | 91.9  | 98.4  | 105.0 | 114.8 | 121.4 | 128.0 | 138.8 | 139.4 | 147.6 | 155.8 | 164.0 | ft.   |       |       |       |       |      |  |  |  |
|       | 11,020 | 8,690  | 7,910 | 7,250 | 6,680 | 5,930 | 5,510 | 5,510 | 5,470 | 5,110 | 4,810 | 4,520 | lbs.  |       |       |       |       |       |      |  |  |  |
| 155.8 | 74.1   | 85.3   | 91.9  | 98.4  | 105.0 | 114.8 | 121.4 | 128.0 | 129.3 | 148.0 | 155.8 | ft.   |       |       |       |       |       |       |      |  |  |  |
|       | 11,020 | 9,350  | 8,530 | 7,830 | 7,230 | 6,440 | 5,970 | 5,580 | 5,510 | 5,510 | 5,180 | lbs.  |       |       |       |       |       |       |      |  |  |  |
| 147.6 | 74.1   | 85.3   | 91.9  | 98.4  | 105.0 | 114.8 | 121.4 | 128.0 | 128.9 | 147.6 | ft.   |       |       |       |       |       |       |       |      |  |  |  |
|       | 11,020 | 9,330  | 8,510 | 7,800 | 7,210 | 6,420 | 5,970 | 5,560 | 5,510 | 5,510 | lbs.  |       |       |       |       |       |       |       |      |  |  |  |
| 139.4 | 89.2   | 98.4   | 105.0 | 114.8 | 121.4 | 128.0 | 131.2 | 139.4 | ft.   |       |       |       |       |       |       |       |       |       |      |  |  |  |
|       | 11,020 | 9,920  | 9,170 | 8,200 | 7,650 | 6,940 | 6,500 | lbs.  |       |       |       |       |       |       |       |       |       |       |      |  |  |  |
| 131.2 | 88.6   | 91.9   | 98.4  | 105.0 | 114.8 | 123.0 | ft.   |       |       |       |       |       |       |       |       |       |       |       |      |  |  |  |
|       | 11,020 | 10,580 | 9,720 | 8,990 | 8,050 | 7,500 | lbs.  |       |       |       |       |       |       |       |       |       |       |       |      |  |  |  |
| 123.0 |        |        |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       | ft.  |  |  |  |
|       |        |        |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       | lbs. |  |  |  |




**DS.0840.03** 10/08 Reserva de modificaciones.- Subject to modifications.- Modifications réservées.- Konstruktionsänderungen vorbehalten.

139.1 ft.    157.1 ft.    194.2 ft.    134.2 ft.    170.3 ft.    188.3 ft.

(H)    (H)    (H)    (H)    (H)    (H)

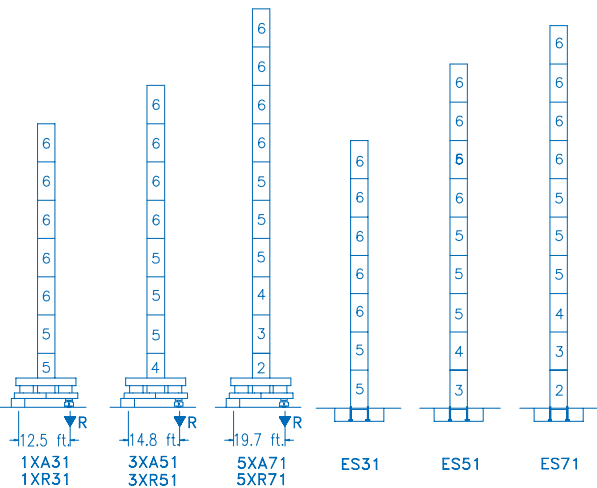

|        |                |
|--------|----------------|
| N Ref. | h              |
| 2      | TS15 18.0 ft.  |
| 3      | S14 18.0 ft.   |
| 4      | TS14 18.0 ft.  |
| 5      | S13 18.0 ft.   |
| 6      | S12 18.0 ft.   |
| 9      | CLS15 10.2 ft. |

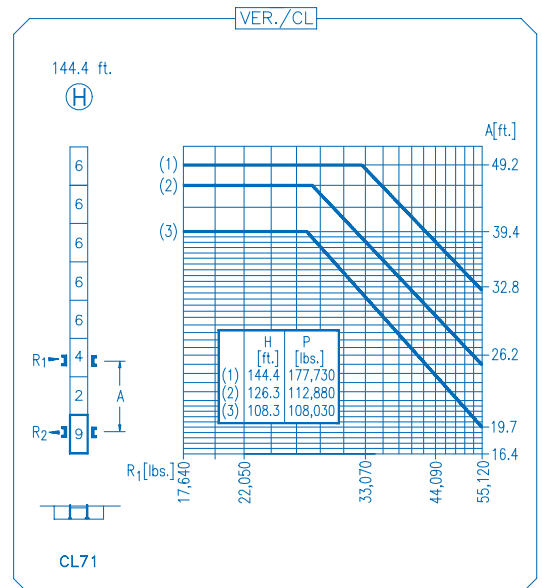

|                |              |                               |
|----------------|--------------|-------------------------------|
| <b>R. máx.</b> | En servicio  | <b>1XR31 ... 155,860 lbs.</b> |
|                | In operation | <b>3XR51 ... 149,910 lbs.</b> |
|                | En service   | <b>5XR71 ... 159,170 lbs.</b> |
|                | In Betrieb   |                               |

|                |                   |                               |
|----------------|-------------------|-------------------------------|
| <b>R. máx.</b> | Fuera de servicio | <b>1XR31 ... 198,850 lbs.</b> |
|                | Out of service    | <b>3XR51 ... 215,170 lbs.</b> |
|                | Hors service      | <b>5XR71 ... 251,100 lbs.</b> |
|                | Ausser Betrieb    |                               |

**CS2-1.9**

**2.5 hp.**

55 ft./min  
157 ft./min

**CFU-2.2**

**2.9 hp.**

0 ⇄ 262 ft./min

**GR-5.5**

**2x40 ft.lbs.**

0 ⇄ 0.7 rpm

|                |                |
|----------------|----------------|
| <b>TS2-5.5</b> | <b>TRA-7.5</b> |
| 2x40 ft.lbs.   | 2x55 ft.lbs.   |
| 0 ⇄ 65 ft./min |                |
| 1XR31<br>3XR51 | 5XR 71         |

**TRA-7.5VC**

**2x55 ft.lbs.**

0 ⇄ 65 ft./min

**5XR71**

1,080 ft.

**ES3-18-12**

**24 hp.**

|   |         |        |        |       |
|---|---------|--------|--------|-------|
|   |         | I      | II     | III   |
| ⬆ | ft./min | 30     | 126    | 252   |
|   | lbs.    | 5,510  | 5,510  | 2,865 |
| ⬇ | ft./min | 15     | 63     | 126   |
|   | lbs.    | 11,020 | 11,020 | 5,730 |

1,080 ft.

**EFU2-18-12**

**24 hp.**

|                         |              |
|-------------------------|--------------|
| Tensión de alimentación | <b>480 V</b> |
| Operating voltage       | <b>3 ph</b>  |
| Tension de service      | <b>60 Hz</b> |
| Betriebsspannung        |              |

|            |          |
|------------|----------|
| Optional   | <b>*</b> |
| Optional   |          |
| En option  |          |
| Kaufoption |          |