


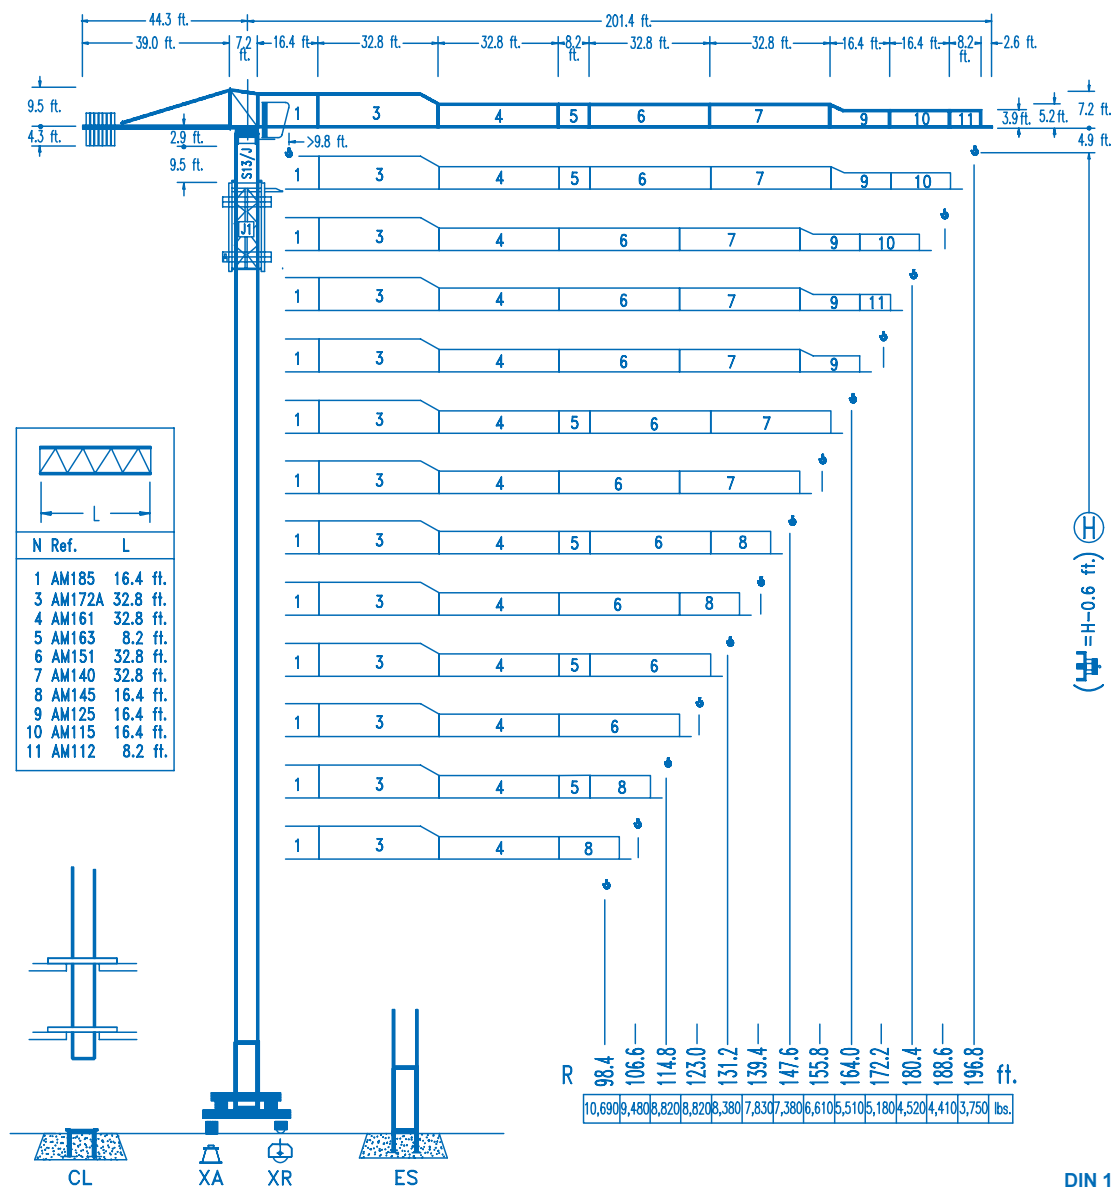

LINDEN 1100

11 LC 150



17,640 lbs.

CE
DIN 15018 H1 B3

R																				
196.8	48.6	65.6	75.5	86.9	94.5	98.4	106.6	114.8	123.0	131.2	139.4	147.6	155.8	164.0	172.2	180.4	188.6	196.8	ft.	
	17,640	12,370	10,470	8,820	8,820	8,420	7,690	7,080	6,550	6,080	5,670	5,290	4,960	4,670	4,410	4,170	3,950	3,750	lbs.	
188.6	52.8	65.6	75.5	82.0	94.8	103.3	106.6	114.8	123.0	131.2	139.4	147.6	155.8	164.0	172.2	180.4	188.6	ft.		
	17,640	13,690	11,620	10,520	8,820	8,820	8,530	7,850	7,250	6,750	6,280	5,890	5,530	5,200	4,920	4,650	4,410	lbs.		
180.4	51.5	65.6	75.5	82.0	92.5	101.0	106.6	114.8	123.0	131.2	139.4	147.6	155.8	164.0	172.2	180.4	ft.			
	17,640	13,320	11,290	10,210	8,820	8,820	8,290	7,630	7,050	6,570	6,110	5,730	5,380	5,070	4,780	4,520	lbs.			
172.2	55.1	65.6	75.5	82.0	91.9	99.1	107.9	114.8	123.0	131.2	139.4	147.6	155.8	164.0	172.2	ft.				
	17,640	14,370	12,210	11,070	9,660	8,820	8,820	8,250	7,630	7,100	6,610	6,190	5,820	5,490	5,180	lbs.				
164.0	55.1	65.6	75.5	82.0	91.9	99.1	108.6	114.8	123.0	131.2	139.4	147.6	155.8	164.0	ft.					
	17,640	14,440	12,260	11,090	9,680	8,550	8,820	8,290	7,670	7,120	6,660	6,220	5,840	5,510	lbs.					
155.8	61.0	75.5	82.0	91.9	98.4	109.9	120.7	123.0	131.2	139.4	147.6	155.8	ft.							
	17,640	13,820	12,540	10,980	10,100	8,820	8,820	8,640	8,020	7,500	7,030	6,610	lbs.							
147.6	63.6	75.5	82.0	91.9	98.4	106.6	114.8	126.0	131.2	139.4	147.6	ft.								
	17,640	14,510	13,160	11,530	10,630	9,630	8,820	8,820	8,420	7,870	7,390	lbs.								
139.4	63.3	75.5	82.0	91.9	98.4	106.6	114.2	125.3	131.2	139.4	ft.									
	17,640	14,400	13,070	11,440	10,540	9,570	8,820	8,820	8,380	7,830	lbs.									
131.2	63.3	75.5	82.0	91.9	98.4	106.6	113.8	125.3	131.2	ft.										
	17,640	14,370	13,050	11,420	10,520	9,550	8,820	8,820	8,380	lbs.										
123.0	62.0	75.5	82.0	91.9	98.4	105.0	111.5	123.0	ft.											
	17,640	14,070	12,760	11,160	10,270	9,500	8,820	8,820	lbs.											

</

DS.0840.05 10/08 Reserva de modificaciones.- Subject to modifications.- Modifications réservées.- Konstruktionsänderungen vorbehalten.

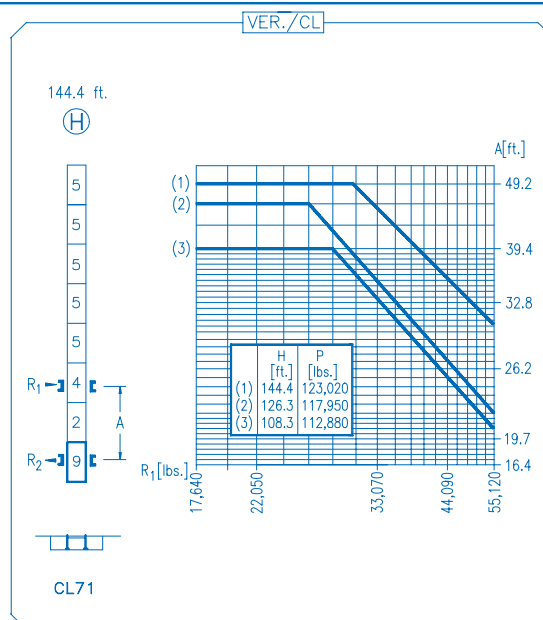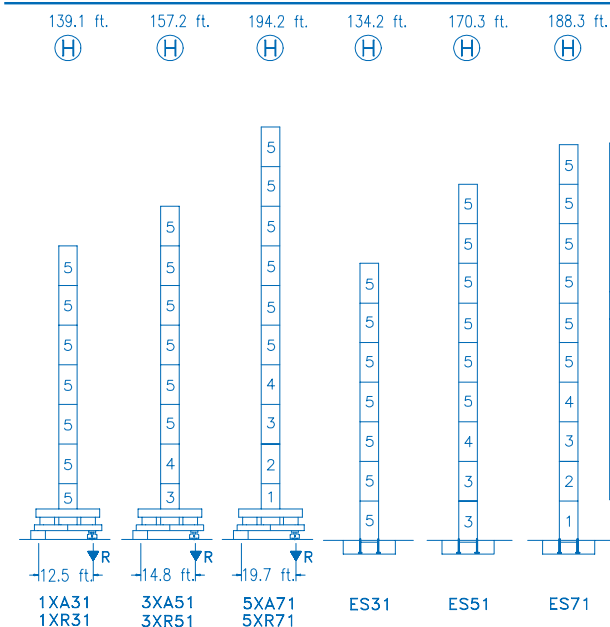

R. máx.	En servicio In operation En service In Betrieb	1XR31 ... 168,650 lbs. 3XR51 ... 162,260 lbs. 5XR71 ... 147,710 lbs.
----------------	---	---

R. máx.	Fuera de servicio Out of service Hors service Ausser Betrieb	1XR31 ... 202,160 lbs. 3XR51 ... 220,680 lbs. 5XR71 ... 230,160 lbs.
----------------	---	---

CFU-4.0

5.4 hp.

0 ⇄ 295 ft./min

GR-7.5

2 x 55 ft.lbs.

0 ⇄ 0.7 rpm




TS2-5.5	TRA-7.5
2x40 ft.lbs.	2x55 ft.lbs.
0 ⇄ 65 ft./min	
1XR31 3XR51	5XR 71

TRA-7.5VC

2x55 ft.lbs.

0 ⇄ 65 ft./min

5XR71

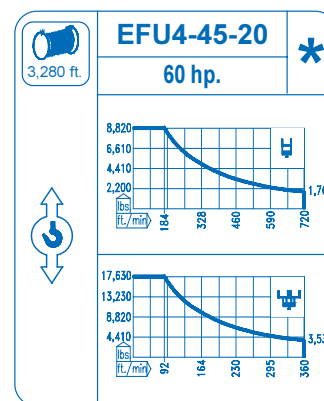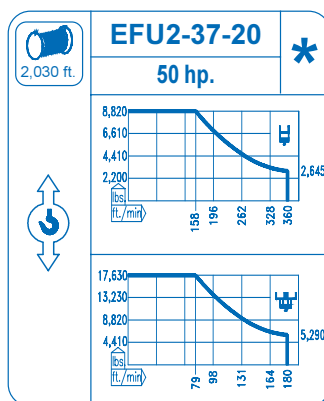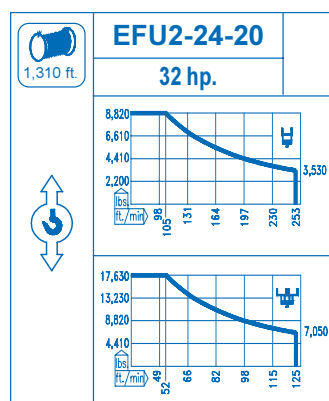

Tensión de alimentación Operating voltage Tension de service Betriebsspannung	480 V 3 ph 60 Hz
--	---

Optional Optional En option Kaufoption	*
---	---