




LINDEN 1100


11 LC 160


17,640 lbs.

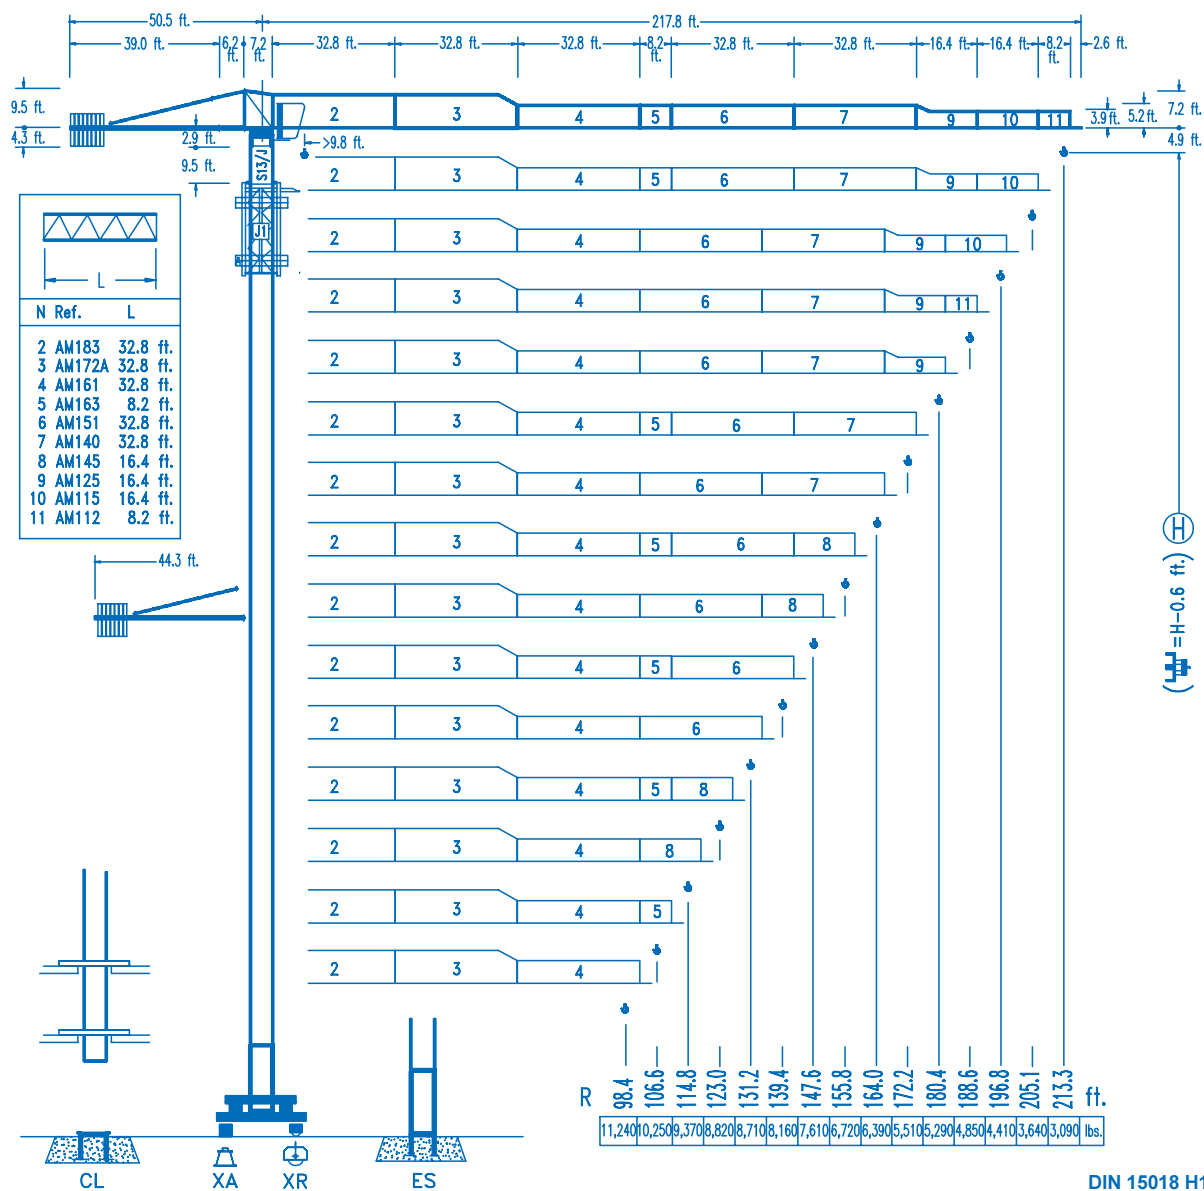

(H) = H - 0.6 ft.



CE
DIN 15018 H1 B3

R																					
213.3	45.3 17,640	49.2 15,980	65.6 11,380	81.0 8,820	87.9 8,820	91.9 8,380	98.4 7,760	106.6 7,080	114.8 6,500	123.0 6,020	131.2 5,580	139.4 5,180	147.6 4,850	155.8 4,540	164.0 4,280	172.2 4,030	180.4 3,810	188.6 3,590	196.8 3,420	205.1 3,240	213.3 3,090 lbs.
205.1	49.5 17,640	65.6 12,610	75.5 10,690	88.3 8,820	96.1 8,820	98.4 8,580	106.6 7,850	114.8 7,210	123.0 6,660	131.2 6,190	139.4 5,780	147.6 5,400	155.8 5,070	164.0 4,760	172.2 4,500	180.4 4,250	188.6 4,030	196.9 3,840	205.1 3,640	213.3 3,460 lbs.	
196.8	55.1 17,640	65.6 14,400	75.5 12,210	82.0 11,070	91.9 9,660	98.8 8,820	107.9 8,820	114.8 8,220	123.0 7,610	131.2 7,080	139.4 6,590	147.6 6,170	155.8 5,800	164.0 5,470	172.2 5,160	180.4 4,890	188.6 4,630	196.9 4,410 lbs.			
188.6	57.1 17,640	65.6 14,990	75.5 12,740	82.0 11,550	91.9 10,080	98.8 9,102.4	107.9 8,820	114.8 8,580	123.0 7,940	131.2 7,390	139.4 6,880	147.6 6,460	155.8 6,060	164.0 5,710	172.2 5,400	180.4 5,110	188.6 4,850 lbs.				
180.4	58.7 17,640	65.6 15,480	75.5 13,160	82.0 11,930	91.9 10,430	98.4 9,590	105.3 8,820	115.2 8,820	123.0 8,200	131.2 7,630	139.4 7,120	147.6 6,680	155.8 6,260	164.0 5,910	172.2 5,580	180.4 5,290 lbs.					
172.2	57.7 17,640	65.6 15,260	75.5 12,960	82.0 11,750	91.9 10,270	104.3 9,200	113.8 8,820	114.8 8,750	123.0 8,090	131.2 7,520	139.4 7,030	147.6 6,590	155.8 6,190	164.0 5,840	172.2 5,510	180.4 5,290 lbs.					
164.0	62.3 17,640	65.6 16,670	75.5 14,180	82.0 12,870	91.9 11,270	98.4 10,380	105.0 9,590	112.5 8,820	123.4 8,820	131.2 8,220	139.4 7,690	147.6 7,210	155.8 6,770	164.0 6,390	172.2 6,060	180.4 5,780	188.6 5,460	196.9 5,140	205.1 4,820	213.3 4,500 lbs.	
155.8	62.0 17,640	65.6 16,510	75.5 14,070	82.0 12,760	91.9 11,160	98.4 10,270	105.0 9,500	111.5 8,820	122.4 8,820	131.2 8,160	139.4 7,630	147.6 7,140	155.8 6,720	164.0 6,390	172.2 6,060	180.4 5,780	188.6 5,460	196.9 5,140	205.1 4,820	213.3 4,500 lbs.	
147.6	65.3 17,640	75.5 14,950	82.0 13,560	91.9 11,880	98.4 10,960	105.0 10,140	117.8 8,820	129.3 8,820	131.2 8,690	139.4 8,110	147.6 7,610	155.8 7,140	164.0 6,720	172.2 6,390	180.4 6,060	188.6 5,780	196.9 5,460	205.1 5,140	213.3 4,820	213.3 4,500 lbs.	
139.4	65.6 17,640	75.5 15,010	82.0 13,620	91.9 11,930	98.4 11,000	105.0 10,190	118.1 8,820	129.9 8,820	131.2 8,730	139.4 8,160	147.6 7,610	155.8 7,140	164.0 6,720	172.2 6,390	180.4 6,060	188.6 5,780	196.9 5,460	205.1 5,140	213.3 4,820	213.3 4,500 lbs.	
131.2	65.3 17,640	75.5 14,950	82.0 13,580	91.9 11,880	98.4 10,960	105.0 10,140	117.8 8,820	129.9 8,820	131.2 8,710	139.4 8,160	147.6 7,610	155.8 7,140	164.0 6,720	172.2 6,390	180.4 6,060	188.6 5,780	196.9 5,460	205.1 5,140	213.3 4,820	213.3 4,500 lbs.	
																					R



DS.0840.06

10/08 Reserva de modificaciones.- Subject to modifications.- Modifications réservées.- Konstruktionsänderungen vorbehalten.

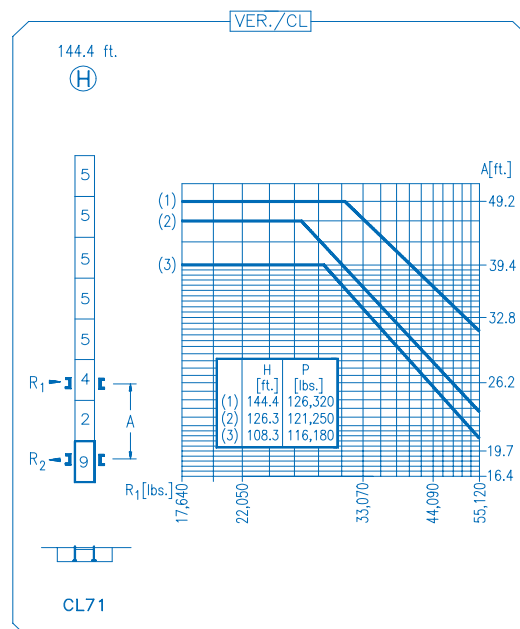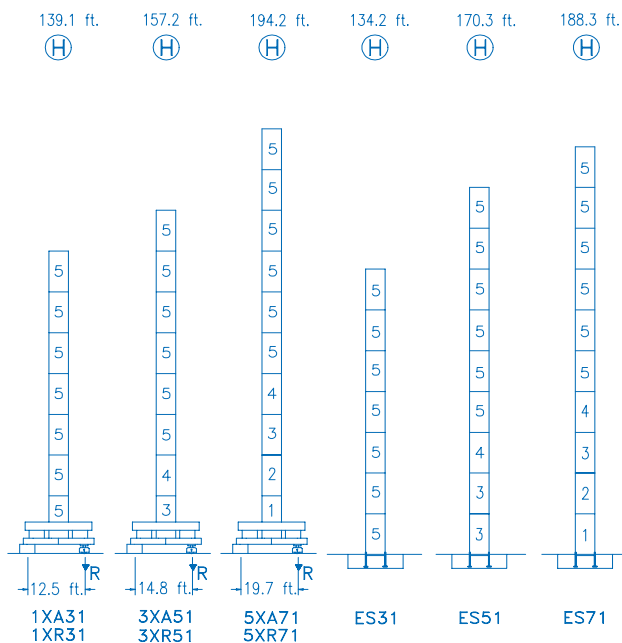

R. máx.	En servicio In operation En service In Betrieb
1XR31 164,460 lbs.	
3XR51 157,630 lbs.	
5XR71 154,100 lbs.	

R. máx.	Fuera de servicio Out of service Hors service Ausser Betrieb
1XR31 187,390 lbs.	
3XR51 206,570 lbs.	
5XR71 245,150 lbs.	

CFU-4.0

5.4 hp.

0 ➤ 295 ft./min

GR-7.5

2 x 55 ft.lbs.

0 ➤ 0.7 rpm




TS2-5.5	TRA-7.5
2x40 ft.lbs.	2x55 ft.lbs.
0 ➤ 65 ft./min	
1XR31 3XR51	5XR 71

TRA-7.5VC

2x55 ft.lbs.

0 ➤ 65 ft./min

5XR71

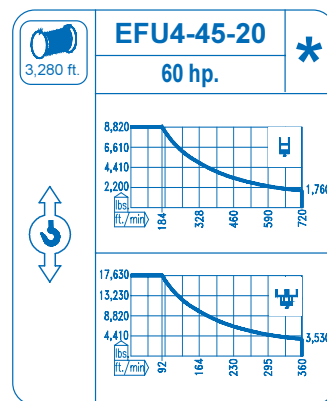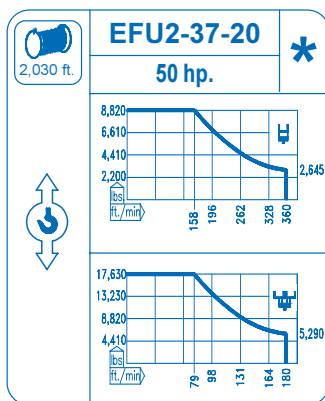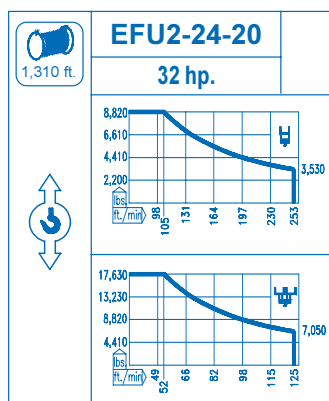

Tensión de alimentación Operating voltage Tension de service Betriebsspannung	400 V 3 ph 50 Hz
--	---

Optional Optional En option Kaufoption	*
---	----------