




COMANSA

LINDEN 500


5 LC 3510

8,820 lbs.

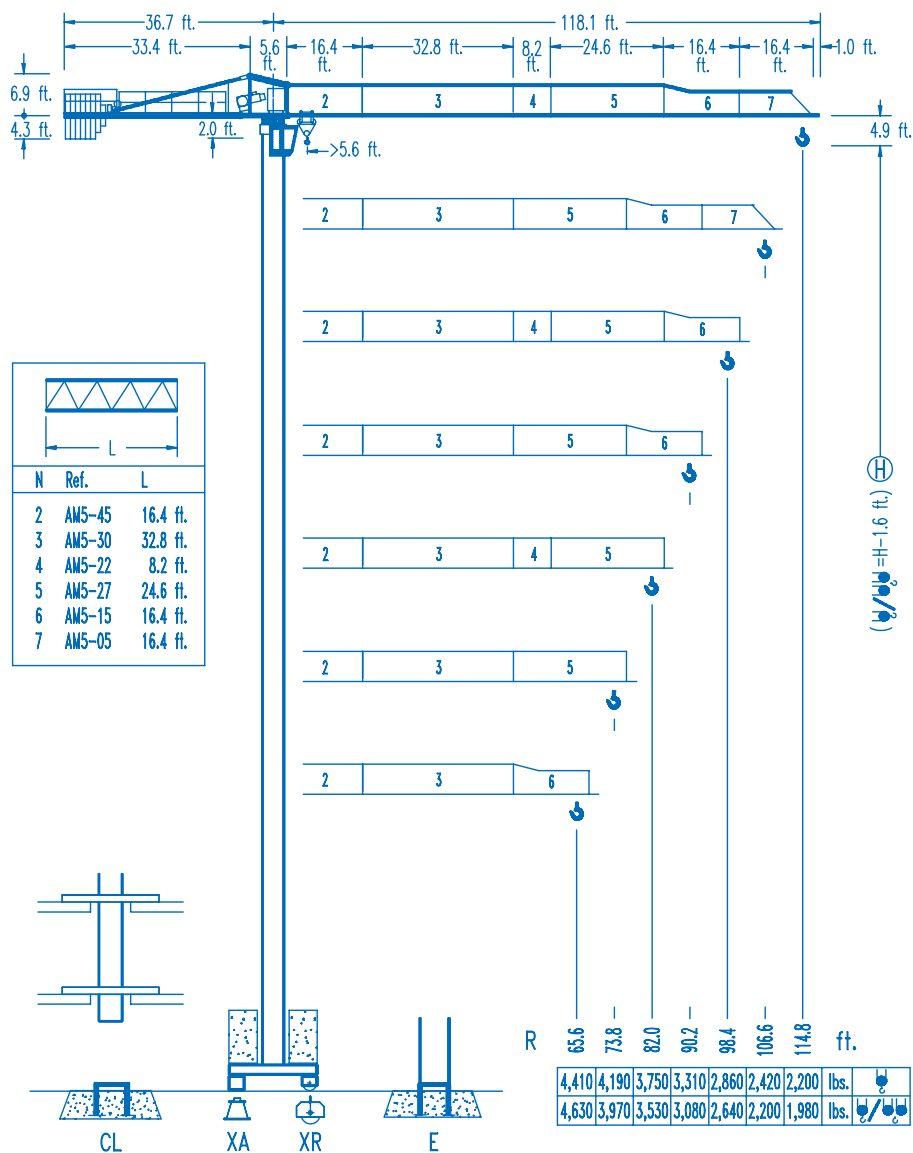

CE
DIN 15018 H1 B3



R	R(Cmax)	Cmax	65.6	73.8	82.0	90.2	98.4	106.6	114.8	ft.	lbs.
114.8	63.9 ft. 34.8 ft.	4,410 8,820	4,300 4,120	3,750 3,570	3,310 3,130	2,950 2,750	2,670 2,450	2,420 2,200	2,200 1,980		
106.6	64.3 ft. 34.8 ft.	4,410 8,820	4,300 4,140	3,770 3,570	3,330 3,130	2,970 2,750	2,670 2,470	2,420 2,200			
98.4	68.2 ft. 36.7 ft.	4,410 8,820	4,410 4,430	4,010 3,830	3,550 3,350	3,170 2,950	2,860 2,640				
90.2	70.5 ft. 37.7 ft.	4,410 8,820	4,410 4,580	4,160 3,970	3,700 3,480	3,310 3,080					
82.0	71.2 ft. 38.0 ft.	4,410 8,820	4,410 4,650	4,230 4,010	3,750 3,530						
73.8	70.5 ft. 37.7 ft.	4,410 8,820	4,410 4,580	4,190 3,970							
65.6	65.6 ft. 38.0 ft.	4,410 8,820	4,410 4,630								

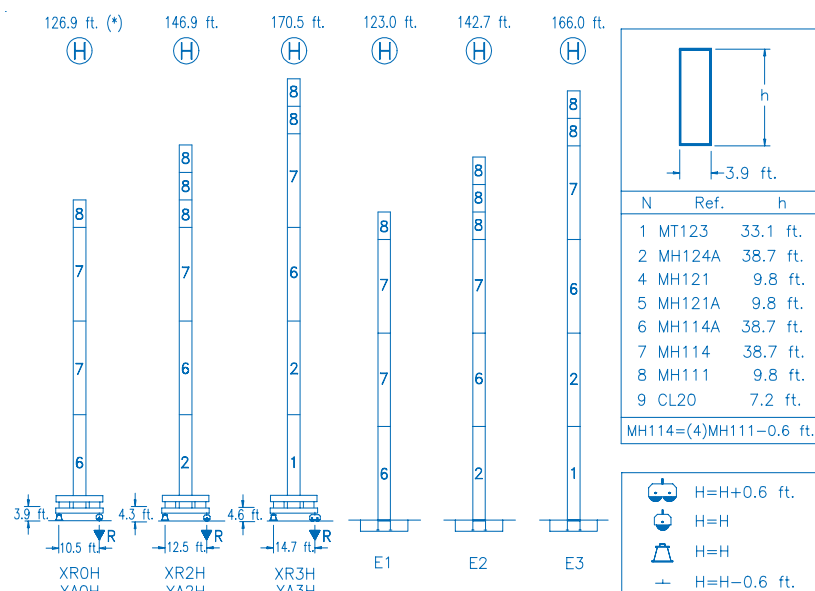

(*) SIN CAB.- CAB. NO.- SANS CAB.- KAB. NEIN.

R. máx.	En servicio	XR0H 83,330 lbs. XR2H 93,040 lbs. XR3H 98,550 lbs.
	In operation	
	En service	
	In Betrieb	

R. máx.	Fuera de servicio	XR0H 128,750 lbs. XR2H 158,510 lbs. XR3H 176,590 lbs.
	Out of service	
	Hors service	
	Ausser Betrieb	

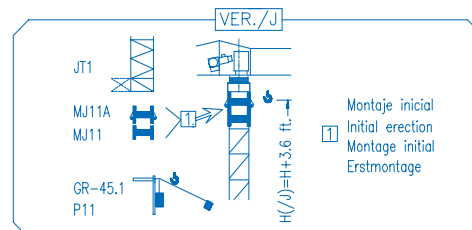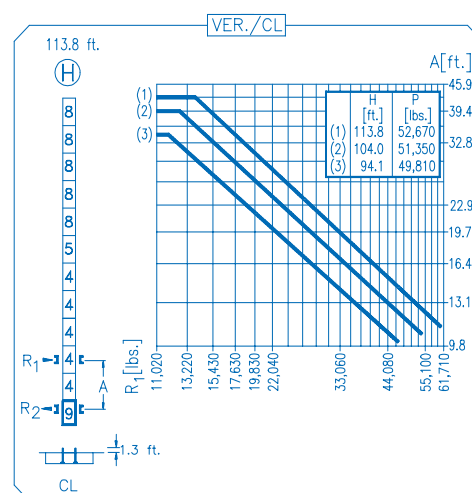

CS2-1.9
3 hp.
63 ft./min 189 ft./min

CFU-2.2
3 hp.
0 262 ft./min

GR-6.5
48 ft.lbs.
0 0.9 rpm

TS2-3.0
2x22 ft.lbs.
0 78 ft./min
XR0H
XR2H
XR3H

ES3-13-10
21 hp.
I
II
III
ft./min
lbs.
ft./min
lbs.

ES3-18-10
29 hp.
I
II
III
ft./min
lbs.
ft./min
lbs.

EFU2-11-10
15 hp.
ft./min
lbs.
ft./min
lbs.

EFU2-18-10
24 hp.
ft./min
lbs.
ft./min
lbs.

Tensión de alimentación
Operating voltage
Tension de service
Betriebsspannung

480 V
3 ph
60 Hz

Optional
Optional
En option
Kaufoption



Construcciones Metálicas COMANSA S. A.

Tel.: (34) 948 335 020
Fax: (34) 948 330 810
e-mail: info@comansa.com
www.comansa.com

Polígono Urbizkain
E-31620 HUARTE-PAMPLONA.- SPAIN

DS.0551.09
12/05
5 LC 3510
8,820 lbs.