




COMANSA

LINDEN 500

5 LC 4010




8,820 lbs.

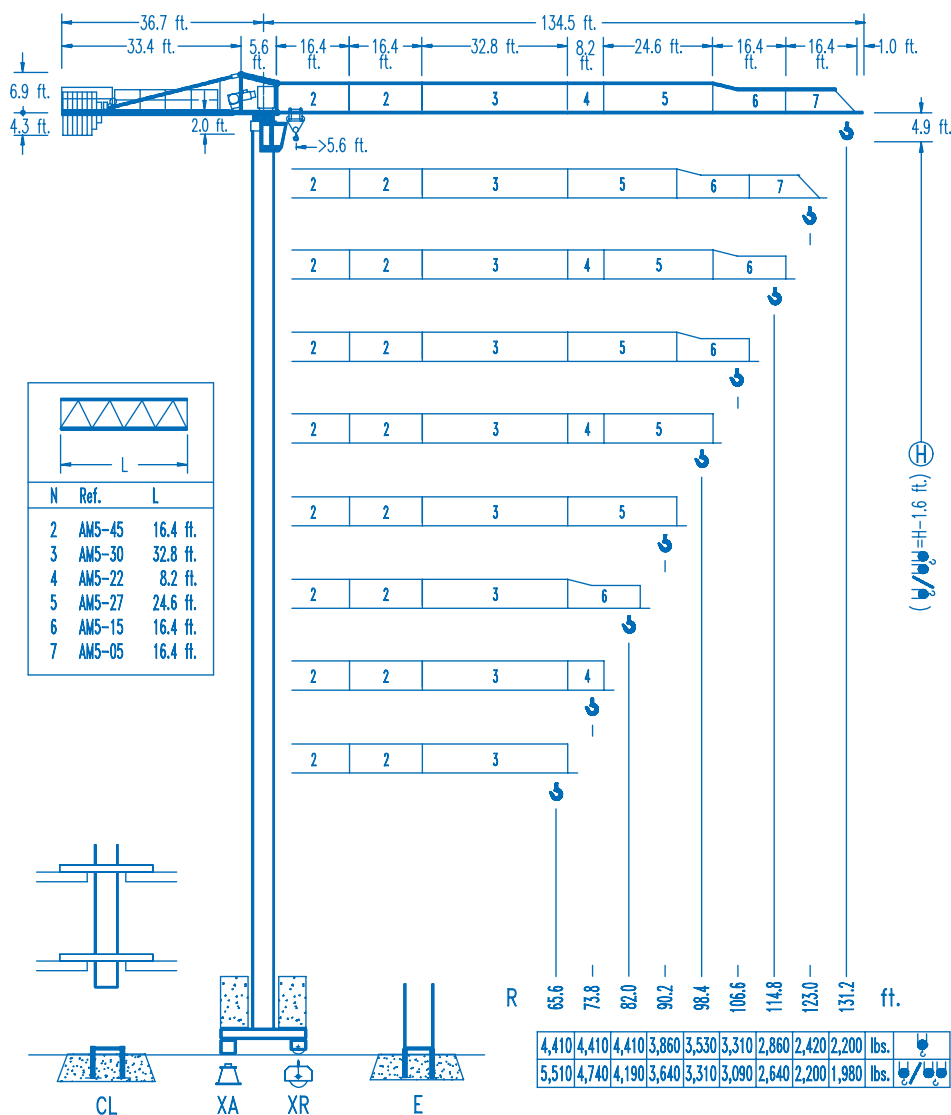CE
DIN 15018 H1 B3

R	R(Cmax)	Cmax	65.6	73.8	82.0	90.2	98.4	106.6	114.8	123.0	131.2	ft.
131.2	73.1 ft.	4,410	4,360	4,360	3,860	3,460	3,130	2,840	2,600	2,380	2,200	1,980
	39.4 ft.	8,820	4,850	4,210	3,700	3,280	2,930	2,640	2,380	2,180	1,980	
123.0	74.1 ft.	4,410	4,410	4,410	3,920	3,500	3,170	2,890	2,640	2,420		
	39.7 ft.	8,820	4,910	4,250	3,750	3,330	2,970	2,670	2,420	2,200		
114.8	79.4 ft.	4,410	4,410	4,410	4,250	3,810	3,440	3,130	2,860			
	42.3 ft.	8,820	5,310	4,610	4,050	3,610	3,240	2,910	2,640			
106.6	83.0 ft.	4,410	4,410	4,410	4,410	4,010	3,640	3,310				
	44.3 ft.	8,820	5,600	4,870	4,270	3,810	3,420	3,090				
98.4	81.0 ft.	4,410	4,410	4,410	4,340	3,900	3,530					
	43.3 ft.	8,820	5,420	4,720	4,140	3,680	3,310					
90.2	80.4 ft.	4,410	4,410	4,410	4,300	3,860						
	42.6 ft.	8,820	5,350	4,650	4,100	3,640						
82.0	82.0 ft.	4,410	4,410	4,410	4,410							
	43.6 ft.	8,820	5,460	4,760	4,190							
73.8	73.8 ft.	4,410	4,410	4,410								
	43.3 ft.	8,820	5,440	4,740								
65.6	65.6 ft.	4,410	4,410									
	43.6 ft.	8,820	5,510									

DS.0551.12

12/05 Reserva de modificaciones.- Subject to modifications.- Modifications réservées.- Konstruktionsänderungen vorbehalten.

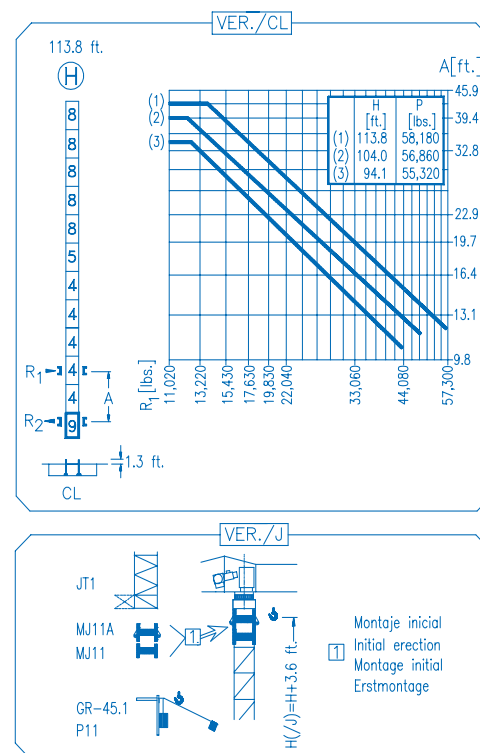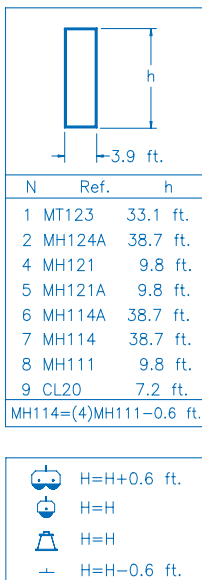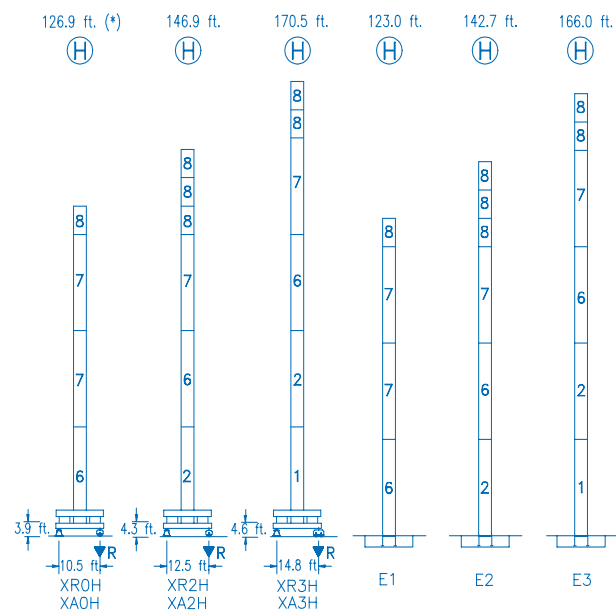

(*) SIN CAB. - CAB. NO. - SANS CAB. - KAB. NEIN.

R. máx.	En servicio In operation En service In Betrieb	XR0H ... 88,850 lbs. XR2H ... 97,890 lbs. XR3H ... 102,960 lbs.
----------------	---	--

R. máx.	Fuera de servicio Out of service Hors service Ausser Betrieb	XR0H ... 129,190 lbs. XR2H ... 159,840 lbs. XR3H ... 178,350 lbs.
----------------	---	--

CS2-1.9
3 hp.
63 ft./min 189 ft./min

CFU-2.2
3 hp.
0 ⇄ 262 ft./min

GR-6.5
48 ft.lbs.
0 ⇄ 0.9 rpm

TS2-3.0	TS2-4.5	TS2-5.5
2x22 ft.lbs.	2x33 ft.lbs.	2x40 ft.lbs.
0 ⇄ 78 ft./min		
XR0H	XR2H	XR3H






ES3-13-10

21 hp.

		I	II	III
	ft./min	30	118	236
	lbs.	4,410	4,410	2,425
	ft./min	15	59	118
	lbs.	8,820	8,820	4,850

 820 ft.				
ES3-18-10				
29 hp.				
		I	II	III
	ft./min	39	150	299
	lbs.	4,410	4,410	2,425
	ft./min	20	75	150
	lbs.	8,820	8,820	4,850

	EFU2-11-10	
820 ft.	15 hp.	
		
		

820 ft.

EFU2-18-10

24 hp.

Flow Rate (ft./min)	Pressure (lbs.)
177	4,410
230	4,410
292	4,410
296	1,760
302	1,760

Flow Rate (ft./min)	Pressure (lbs.)
89	8,820
98	8,820
115	8,820
131	8,820
148	3,530
151	3,530

Tensión de alimentación Operating voltage Tension de service Betriebsspannung	480 V 3 ph 60 Hz
--	---

Opcional Optional En option Kaufoption	*
---	----------