




**LINDEN 500** 

**5 LC 4010** 


11,020 lbs.

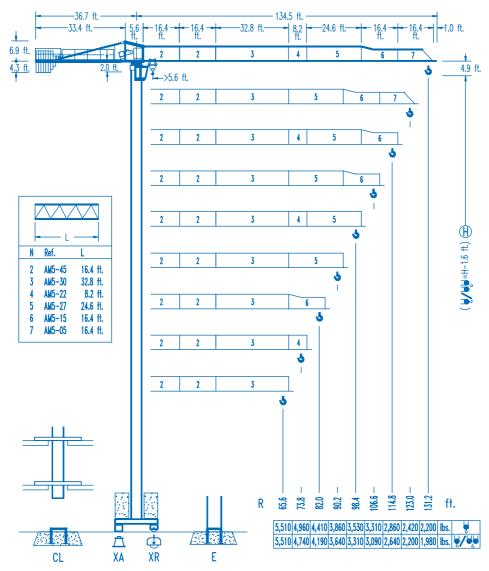



**C€** DIN 15018 H1 B3


R		R(Cmax)	Cmax	65.6	73.8	82.0	90.2	98.4	106.6	114.8	123.0	131.2	ft.
131.2		60.1 ft. 32.4 ft.	5,510 11,020	4,980 4,850	4,360 4,210	3,860 3,700	3,460 3,280	3,130 2,930	2,840 2,640	2,600 2,380	2,380 2,180	2,200 1,980	lbs.
123.0		61.0 ft. 32.8 ft.	5,510 11,020	5,070 4,910	4,430 4,250	3,920 3,750	3,500 3,330	3,170 2,970	2,890 2,670	2,640 2,420	2,420 2,200		
114.8		65.2 ft. 35.1 ft.	5,510 11,020	5,470 5,310	4,780 4,610	4,250 4,050	3,810 3,610	3,440 3,240	3,130 2,910	2,860 2,640	_,		
106.6		68.2 ft. 36.4 ft.	5,510 11,020	5,510 5,600	5,050 4,870	4,470 4,270	4,010 3,810	3,640 3,420	3,310 3,090	2,010			
98.4		66.5 ft. 35.4 ft.	5,510 11,020	5,510 5,420	4,910 4,720	4,340 4,140	3,900 3,680	3,530 3,310	0,000				
90.2		65.9 ft. 35.1 ft.	5,510 11,020	5,510 5,350	4,850 4,650	4,300 4,100	3,860 3,640	3,310					
82.0		67.2 ft. 35.7 ft.	5,510	5,510	4,980 4,760	4,410 4,410 4,190	3,040						
73.8		67.2 ft. 35.7 ft.	11,020 5,510 11,020	5,460 5,510 5,440	4,760 4,960 4,740	4,190							
65.6	Á/M	65.6 ft. 36.1 ft.	5,510 11,020	5,510 5,510	4,740								

DS.0551.13 12/05 Reserva de modificaciones.- Subject to modifications.- Modifications reservèes.- Konstruktionsänderungen vorbehalten.

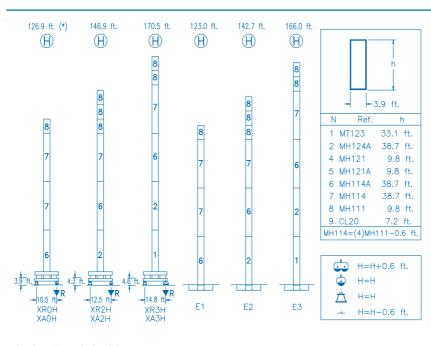







R. máx. En servicio
In operation
En service
In Betrieb

XR0H .... 88,850 lbs. XR2H .... 97,890 lbs. XR3H .. 102,960 lbs. R. máx. Fuera de servicio Out of service Hors service Ausser Betrieb


XR0H ... 129,190 lbs.
 XR2H ... 159,840 lbs.
 XR3H ... 178,350 lbs.



CS2-1.9

3 hp.

63 ft./min 189 ft./min





**GR-6.5** 

48 ft.lbs.

0 c 0.9 rpm




TS2-3.0 TS2-4.5 TS2-5.5 2x22 ft.lbs. 2x33 ft.lbs. 2x40 ft.lbs.


0 ♀ 78 ft./min


XR0H XR2H XR3H



29 hp.								
			II	III				
Ų	ft./min	32	126	252				
2	lbs.	5,510	5,510	2,860				
	ft./min	16	63	126				
	lbs.	11,020	11,020	5,730				







Tensión de alimentación	
Operating voltage	
Tension de service	
Retriehssnannung	

480 V 3 ph 60 Hz Opcional
Optional
En option
Kaufoption



Tel.: (34) 948 335 020 Fax: (34) 948 330 810 e-mail: info@comansa.com www.comansa.com

Polígono Urbizkain E-31620 HUARTE-PAMPLONA.- SPAIN

