




LINDEN 500

5 LC 4510

8,820 lbs.


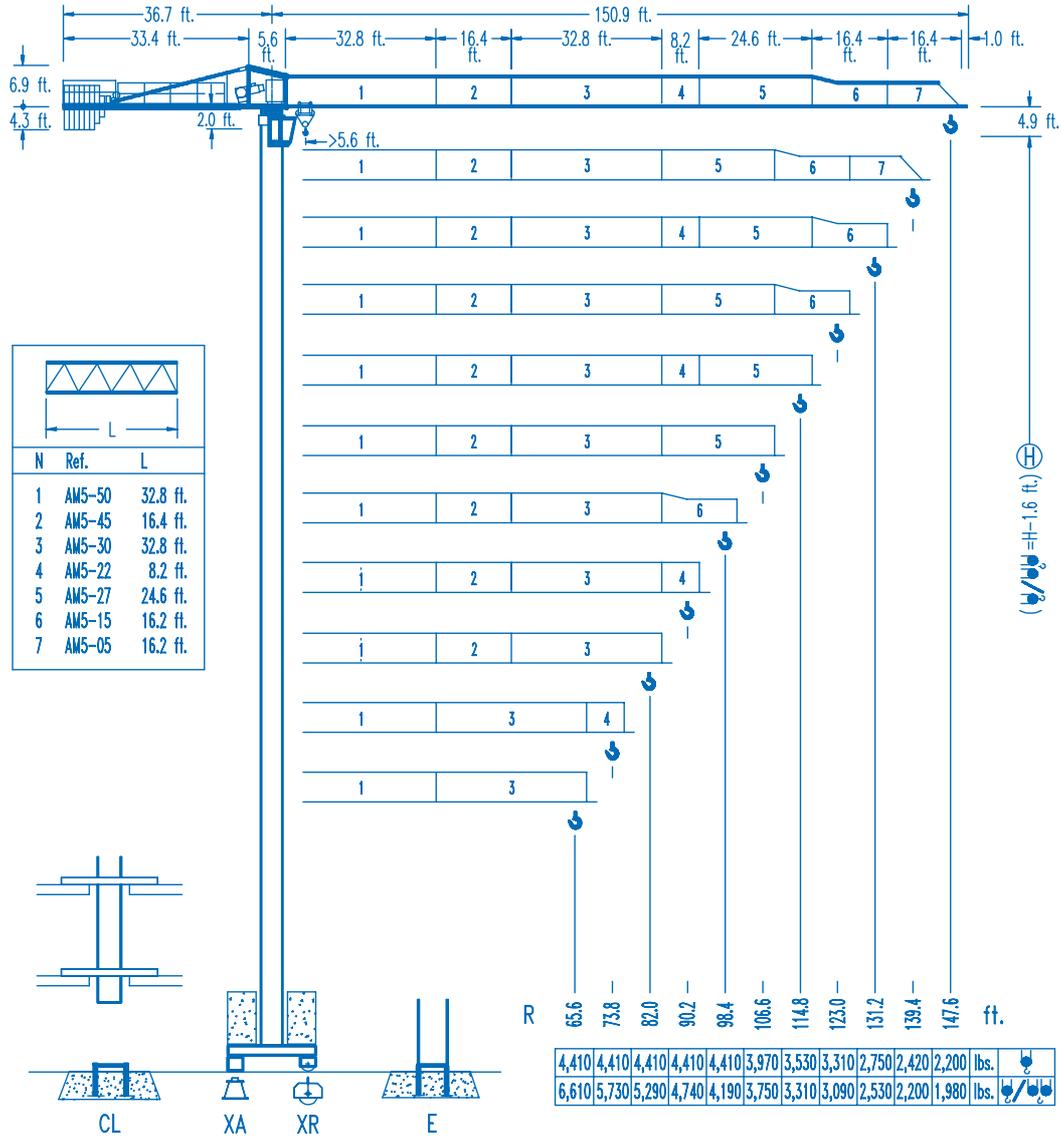


CE  
DIN 15018 H1 B3

R	R(Cmax)	Cmax	65.6	73.8	82.0	90.2	98.4	106.6	114.8	123.0	131.2	139.4	147.6	ft.	lbs.
147.6	82.3 ft.	4,410	4,410	4,410	4,410	3,970	3,570	3,260	3,000	2,750	2,530	2,360	2,200		
	44.3 ft.	8,820	5,580	4,850	4,250	3,790	3,390	3,060	2,800	2,560	2,340	2,160	1,980		
139.4	83.6 ft.	4,410	4,410	4,410	4,410	4,050	3,660	3,350	3,060	2,820	2,600	2,420			
	44.9 ft.	8,820	5,690	4,940	4,360	3,880	3,480	3,150	2,860	2,600	2,400	2,200			
131.2	87.6 ft.	4,410	4,410	4,410	4,410	4,270	3,860	3,530	3,220	2,970	2,750				
	46.9 ft.	8,820	5,970	5,200	4,580	4,080	3,660	3,330	3,020	2,750	2,530				
123.0	95.8 ft.	4,410	4,410	4,410	4,410	4,410	4,270	3,900	3,570	3,310					
	50.8 ft.	8,820	6,590	5,750	5,070	4,540	4,080	3,700	3,370	3,090					
114.8	94.5 ft.	4,410	4,410	4,410	4,410	4,410	4,210	3,830	3,530						
	50.2 ft.	8,820	6,480	5,660	4,980	4,450	4,010	3,640	3,310						
106.6	97.1 ft.	4,410	4,410	4,410	4,410	4,410	4,340	3,970							
	51.5 ft.	8,820	6,680	5,820	5,130	4,580	4,140	3,750							
98.4	98.4 ft.	4,410	4,410	4,410	4,410	4,410	4,410								
	52.1 ft.	8,820	6,770	5,910	5,200	4,650	4,190								
90.2	90.2 ft.	4,410	4,410	4,410	4,410	4,410									
	52.8 ft.	8,820	6,880	6,020	5,310	4,740									
82.0	82.0 ft.	4,410	4,410	4,410	4,410										
	52.8 ft.	8,820	6,850	5,990	5,290										

DS.0551.15



12/05 Reserva de modificaciones.- Subject to modifications.- Modifications réservées.- Konstruktionsänderungen vorbehalten.

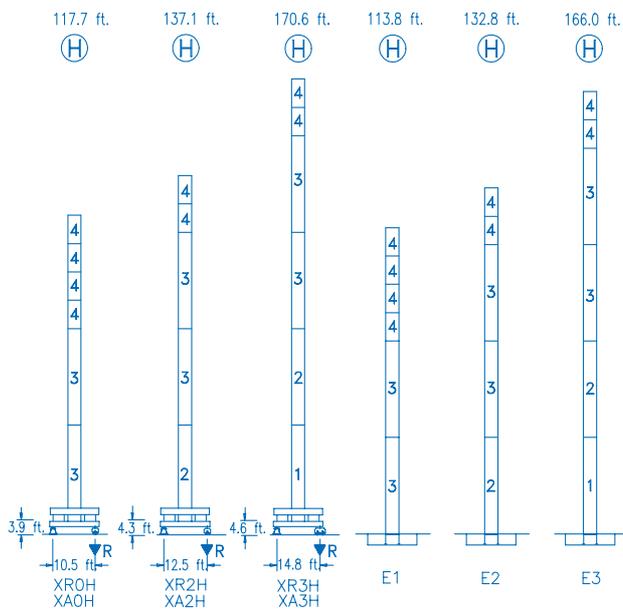

N	Ref.	h
1	MT123	33.1 ft.
2	MH124A	38.7 ft.
3	MH124-1	38.7 ft.
4	MH121	9.8 ft.
9	CL20	7.2 ft.

MH124=(4)MH121-0.6 ft.

- H=H+0.6 ft.
- H=H
- H=H
- H=H-0.6 ft.

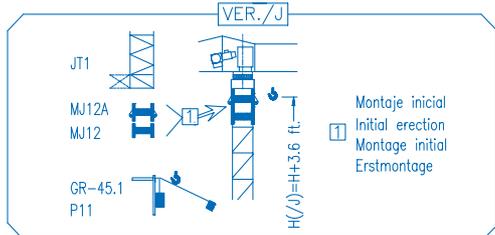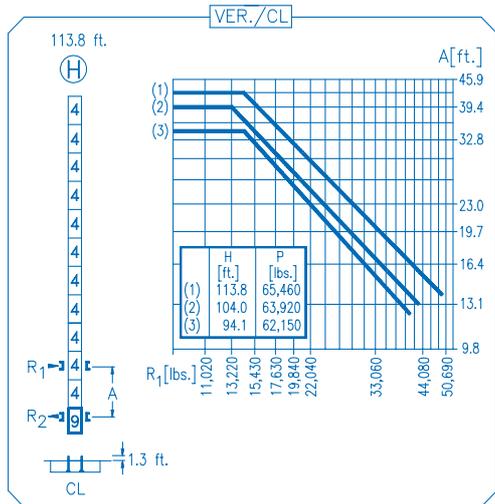

<b>R. máx.</b>	En servicio In operation En service In Betrieb	<b>XR0H ..... 94,580 lbs.</b>
		<b>XR2H ..... 96,560 lbs.</b>
		<b>XR3H ... 113,320 lbs.</b>

<b>R. máx.</b>	Fuera de servicio Out of service Hors service Ausser Betrieb	<b>XR0H .... 118,610 lbs.</b>
		<b>XR2H .... 146,390 lbs.</b>
		<b>XR3H .... 191,800 lbs.</b>

**CS2-1.9**  
3 hp.  
63 ft./min  
189 ft./min

**CFU-2.2**  
3 hp.  
0 ⇄ 262 ft./min

**GR-7.5**  
55 ft.lbs.  
0 ⇄ 0.9 rpm

<b>TS2-3.0</b> 2x22 ft.lbs.	<b>TS2-4.5</b> 2x33 ft.lbs.	<b>TS2-5.5</b> 2x40 ft.lbs.
0 ⇄ 78 ft./min		
<b>XR0H</b>	<b>XR2H</b>	<b>XR3H</b>

**ES3-13-10**  
21 hp.

	I	II	III
ft./min	30	118	236
lbs.	4,410	4,410	2,425
ft./min	15	59	118
lbs.	8,820	8,820	4,850

**ES3-18-10**  
29 hp.

	I	II	III
ft./min	39	150	299
lbs.	4,410	4,410	2,425
ft./min	20	75	150
lbs.	8,820	8,820	4,850

**EFU2-11-10**  
15 hp.

**EFU2-18-10**  
24 hp.

Tensión de alimentación Operating voltage Tension de service Betriebsspannung	<b>480 V</b> <b>3 ph</b> <b>60 Hz</b>
--	---

Opcional  
Optional  
En option  
Kaufoption

**\***

**COMANSA**  
Construcciones Metálicas COMANSA S. A.

Tel.: (34) 948 335 020  
Fax: (34) 948 330 810  
e-mail: info@comansa.com  
www.comansa.com

Polígono Urbizkain  
E-31620 HUARTE-PAMPLONA.- SPAIN

<b>DS.0551.15</b>	12/05	<b>5 LC 4510</b>	<b>8,820 lbs.</b>
-------------------	-------	------------------	-------------------