




COMANSA

LINDEN 500

5 LC 5010

8,820 lbs.










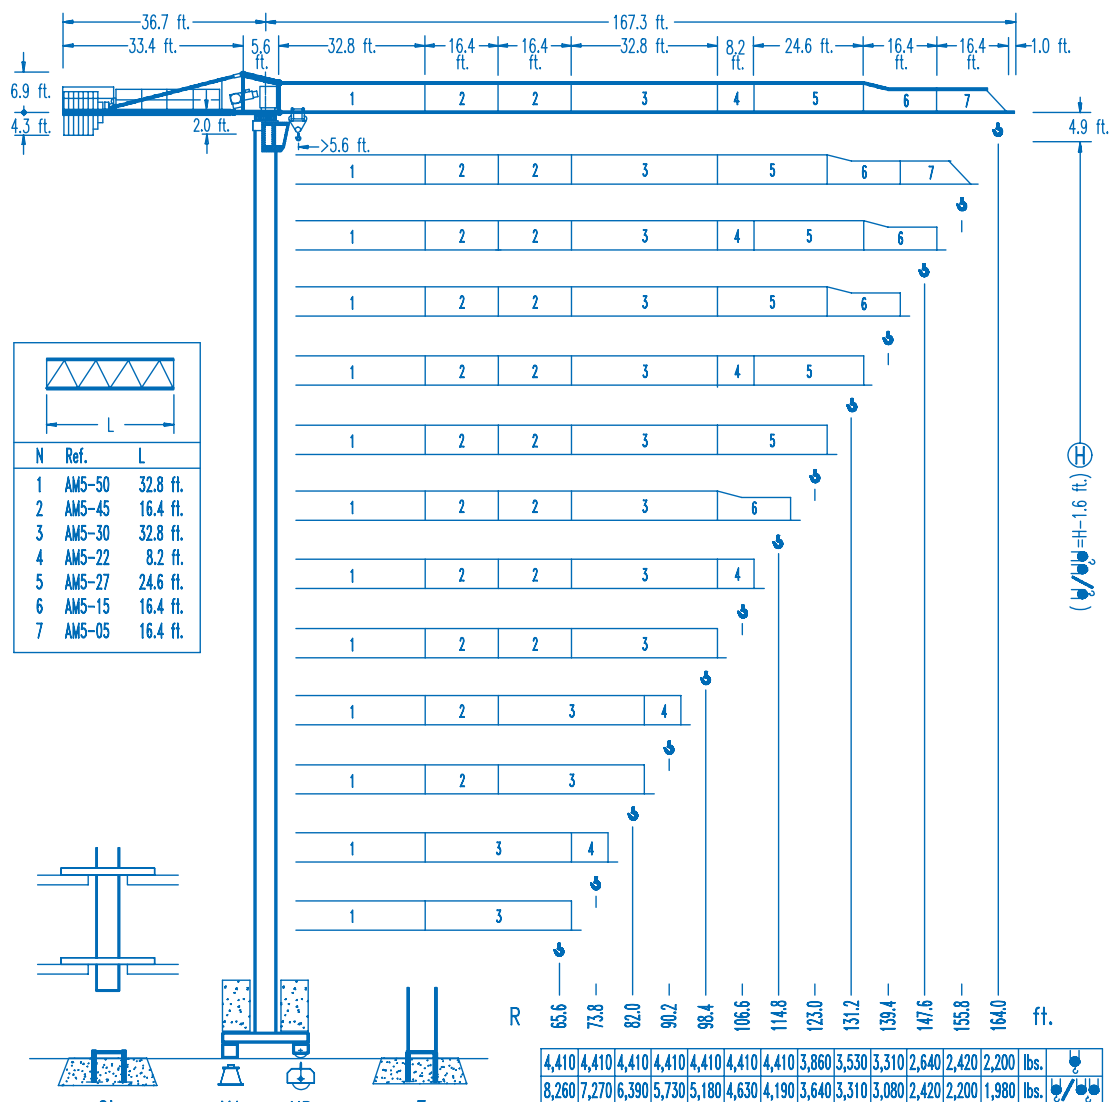
CE
DIN 15018 H1 B3

R	R(Cmax)	Cmax	65.6	73.8	82.0	90.2	98.4	106.6	114.8	123.0	131.2	139.4	147.6	155.8	164.0	ft.
164.0	91.2 ft.	4,410	4,410	4,410	4,410	4,410	4,030	3,680	3,370	3,110	2,890	2,690	2,510	2,360	2,200	164.0
	48.8 ft.	8,820	6,280	5,460	4,830	4,300	3,220	3,500	3,190	2,930	2,690	2,470	2,290	2,140	1,980	164.0
155.8	93.5 ft.	4,410	4,410	4,410	4,410	4,110	4,160	3,790	3,480	3,220	2,970	2,780	2,580	2,420		155.8
	50.2 ft.	8,820	6,460	5,620	4,960	4,430	3,990	3,610	3,280	3,020	2,780	2,550	2,380	2,200		155.8
147.6	95.1 ft.	4,410	4,410	4,410	4,410	4,410	4,250	3,880	3,550	3,280	3,040	2,820	2,640			147.6
	50.8 ft.	8,820	6,570	5,730	5,070	4,520	4,050	3,680	3,350	3,080	2,820	2,620	2,420			147.6
139.4	108.5 ft.	4,410	4,410	4,410	4,410	4,410	4,410	4,410	4,140	3,810	3,550	3,310				139.4
	57.0 ft.	8,820	7,600	6,630	5,860	5,240	4,740	4,300	3,920	3,610	3,330	3,080				139.4
131.2	107.9 ft.	4,410	4,410	4,410	4,410	4,410	4,410	4,410	4,100	3,790	3,530					131.2
	57.0 ft.	8,820	7,540	6,590	5,820	5,220	4,690	4,270	3,900	3,590	3,310					131.2
123.0	109.5 ft.	4,410	4,410	4,410	4,410	4,410	4,410	4,410	4,160	3,860						123.0
	57.7 ft.	8,820	7,650	7,270	5,910	5,290	4,760	4,340	3,970	3,640						123.0
114.8	114.8 ft.	4,410	4,410	4,410	4,410	4,410	4,410	4,410	4,410							114.8
	60.7 ft.	8,820	8,040	7,030	6,240	5,580	5,020	4,580	4,190							114.8
106.6	106.6 ft.	4,410	4,410	4,410	4,410	4,410	4,410	4,410								106.6
	61.0 ft.	8,820	8,130	7,120	6,300	5,640	5,090	4,630								106.6
98.4	98.4 ft.	4,410	4,410	4,410	4,410	4,410	4,410									98.4
	62.0 ft.	8,820	8,260	7,230	6,410	5,730	5,180									98.4

DS.0551.18

12/05

Reserva de modificaciones.- Subject to modifications.- Modifications réservées.- Konstruktionsänderungen vorbehalten.

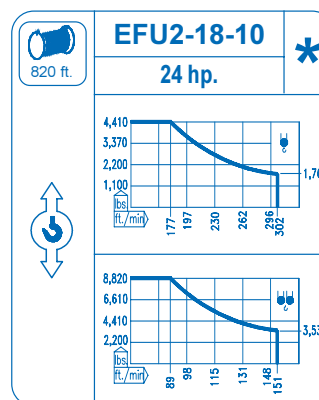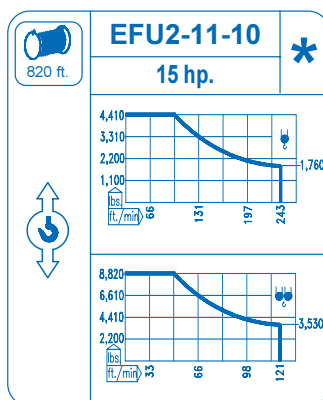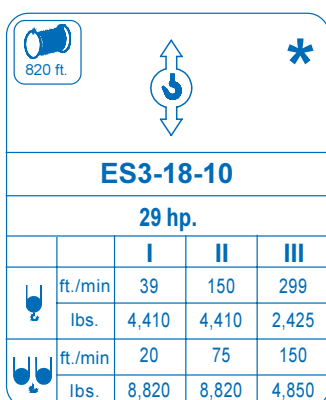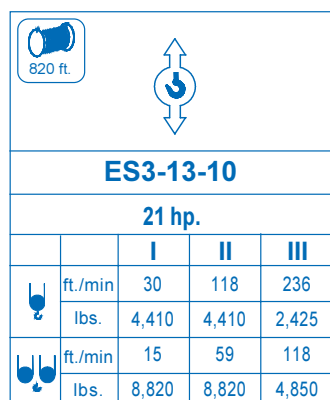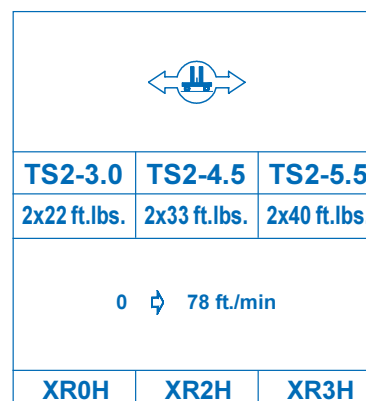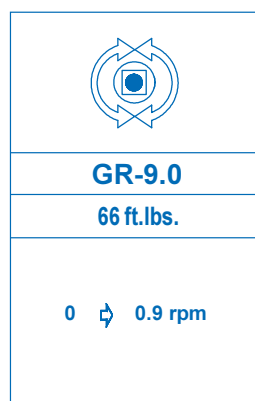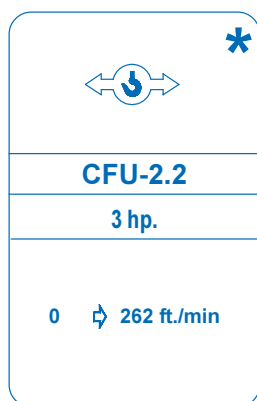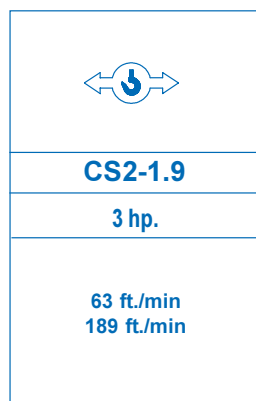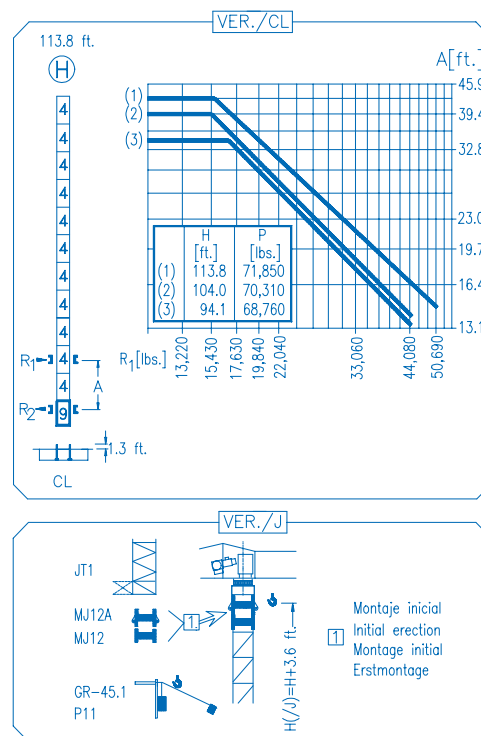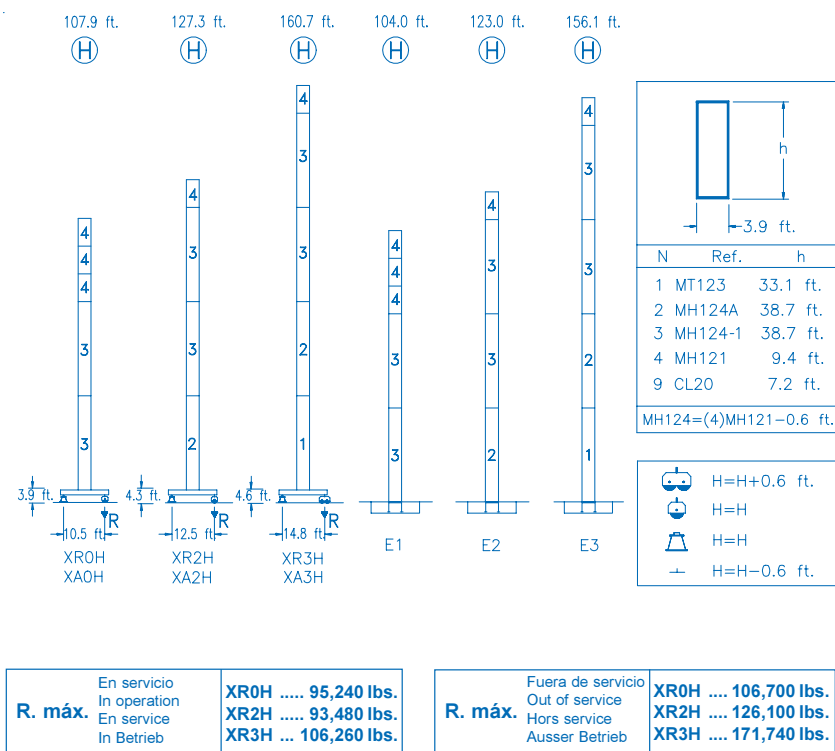

Tensión de alimentación Operating voltage Tension de service Betriebsspannung	480 V 3 ph 60 Hz
--	---------------------------------

Optional Optional En option Kaufoption	*
---	----------