


COMEDIL CTL 400-24

LUFFING CRANE

HEIGHT / REACH CONFIGURATIONS



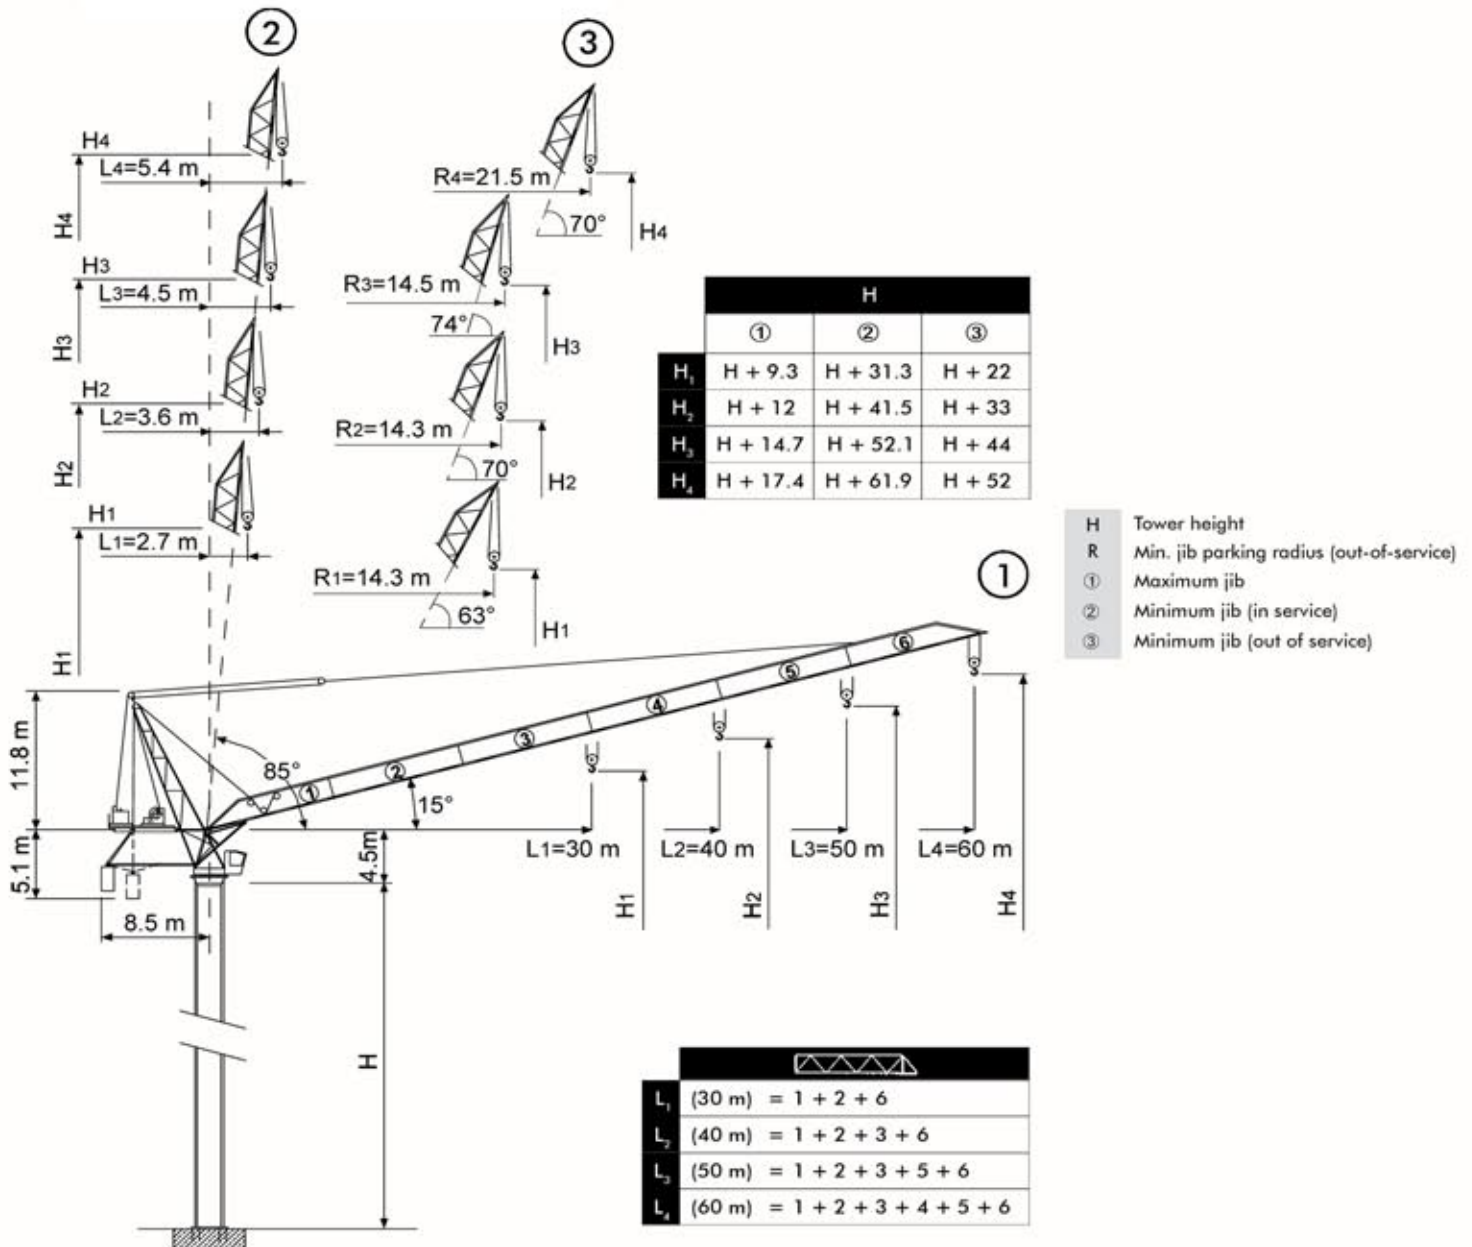

COMEDIL CTL 400-24

LUFFING CRANE SPECIFICATIONS

Radius and Capacities

		CTL 400/A-24																
		m	20	22	24	26	28	30	32	34	36	38	40	45	50	55	60	
12 t	- 25.7 m	t	12	12	12	11.84	10.99	10.23	9.56	8.98	8.45	7.99	7.57	6.68	5.97	5.38	4.9	
12 t	- 32.9 m	t	12	12	12	12	12	12	12	11.59*	10.9*	10.27*	9.71*	8.53*	7.6*			
18 t	- 23.1 m	t	18	18	17.26	15.89	14.72	13.7	12.81	12.02	11.33	10.7	10.14	8.95	8			
12 t	- 36.3 m	t	12	12	12	12	12	12	12	12	12	11.43*	10.85*					
18 t	- 25.3 m	t	18	18	18	17.53	16.24	15.12	14.14	13.28	12.51	11.82	11.24					
24 t	- 18.9 m	t	22.66	20.52	18.74	17.23	15.94	14.73	13.75	12.89	12.12	11.43	10.85					
12 t	- 30 m	t	12	12	12	12	12	12										
18 t	- 26.1 m	t	18	18	18	18	16.75	15.64										
24 t	- 19.4 m	t	23.29	21.09	19.25	17.7	16.36	15.25										

* = + 400 kg [⚙️ - ⚙️] 30 m - 40 m - 50 m ⓘ

⚡	⚡	🔊
258 * kVA	400 - 460 V / 50 - 60 Hz	CE 87/405

		m/min	t	kW	
⚙️	110 AWL 120 LLC D1 110 AWL 120 LLC D2	0 ~ 40	12	110	630 m (LLC D1) 1140 m (LLC D2)
		0 ~ 55	8.6		
		0 ~ 75	6		
		0 ~ 102	4.2		
		0 ~ 116	0.6		
	⚙️	0 ~ 27	18		
		0 ~ 37	12.9		
		0 ~ 50	9		
		0 ~ 68	6.3		
	⚙️	0 ~ 77	0.9		
		0 ~ 20	24		
		0 ~ 27.5	17.2		
		0 ~ 37.5	12		
		0 ~ 51	8.4		
	0 ~ 58	1.2			

🚧	LWL 9000/D2	2.1 min	90 kW
⚙️	SCC 2 2 132	0 ~ 0.65 r.p.m.	2 × 14 kW
⚙️	TSR 2 RG 4 M 8	12 ~ 24 m/min	4 × 80 Nm
⚙️	ⓘ		

- ⚙️ Hoisting
- 🚧 Luffing
- ⚙️ Slewing
- ⚙️ Travelling
- 🔊 Directive on noise level
- ⓘ Consult us
- ⚡ Power requirements
- ⚡ Power supply

FOR REFERENCE USE ONLY!
Please consult Reliable Crane Service for more information.

702-400-2516 or 702-525-0840
sales@reliablecraneservice.com