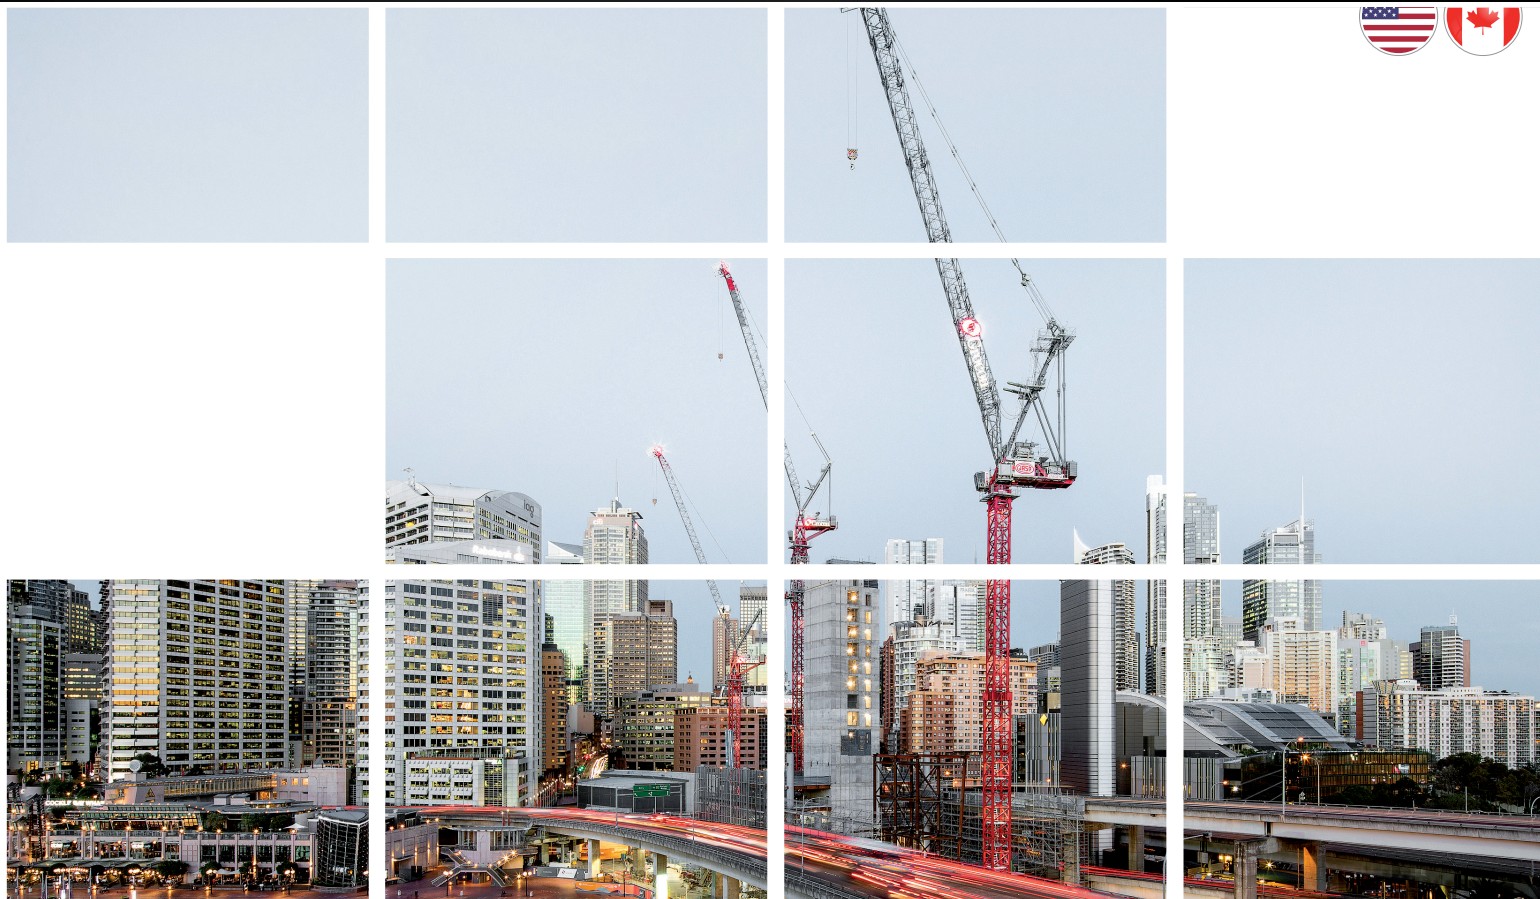




RELIABLE CRANE SERVICE



We **build** the cranes that **build** the world.

North America Range



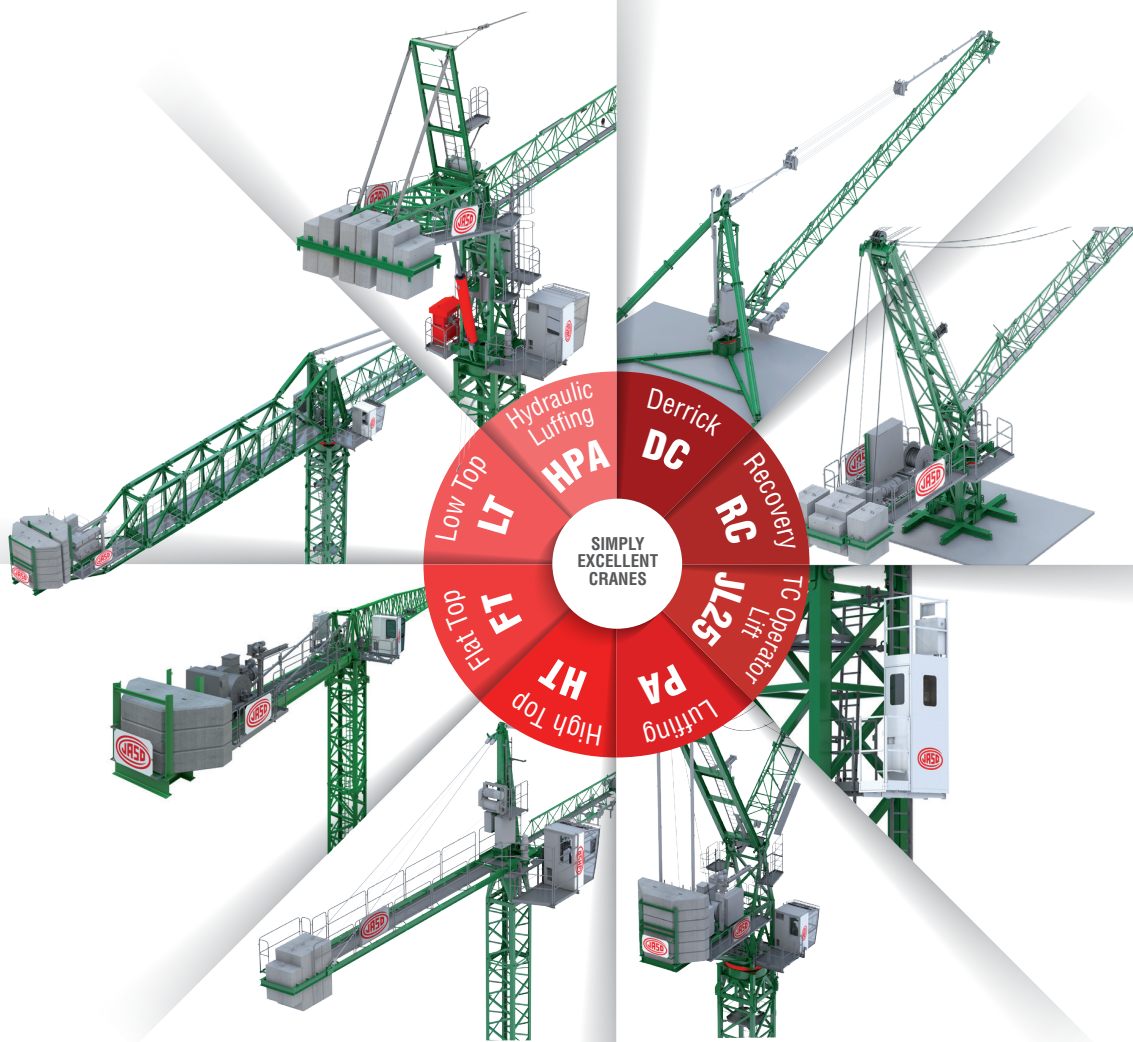
(909) 222-0202

www.relaiblecraneservice.com

260 North Smith Ave. Corona, CA 92880



Product Range



Follow us at:

www.jaso.com



JASO GROUP®



RELIABLE CRANE SERVICE



LT



TOWER
CRANES

(909) 222-0202

www.relaiblecraneservice.com

260 North Smith Ave. Corona, CA 92880



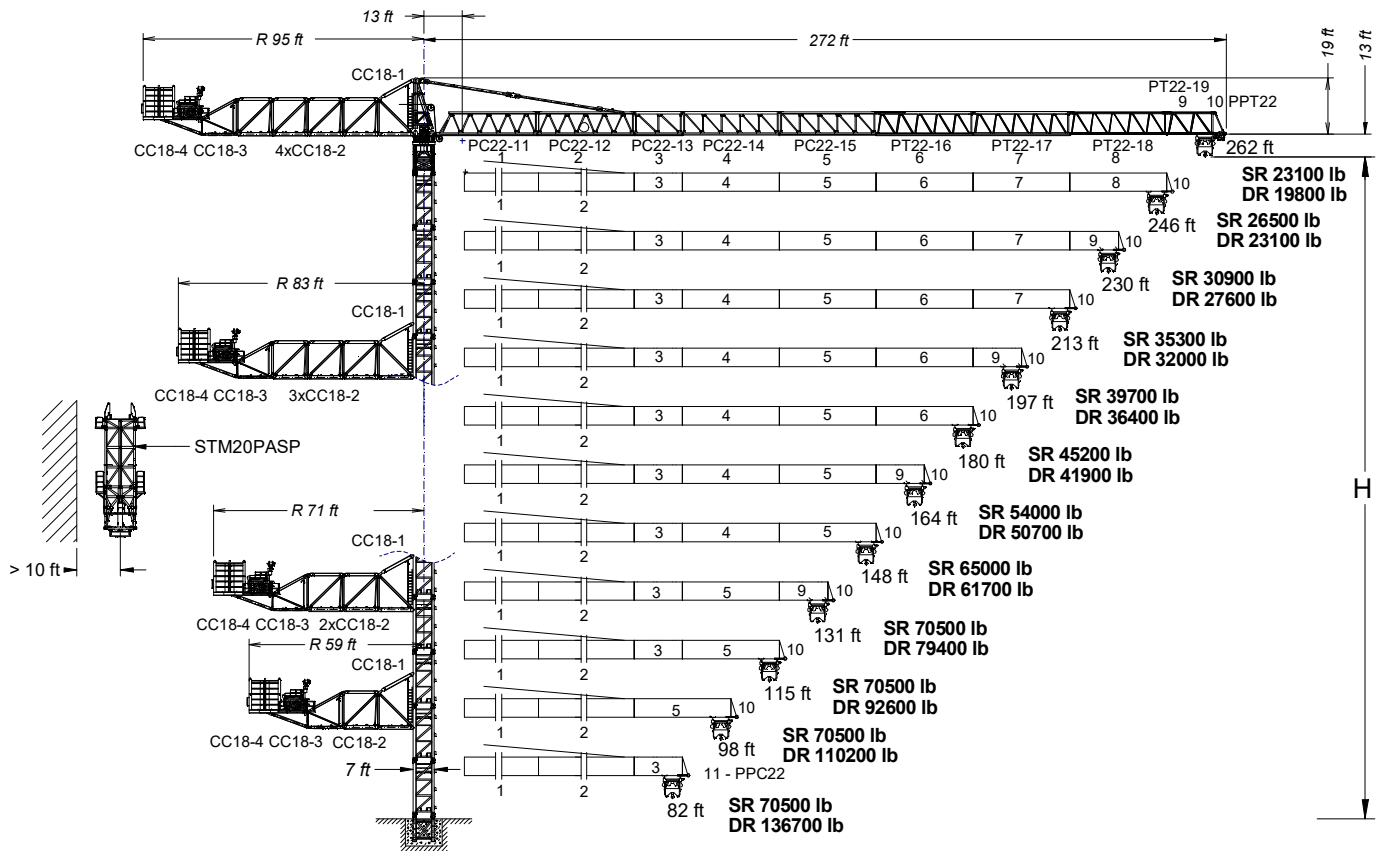
GRUA TORRE TOWER CRANE

J1400



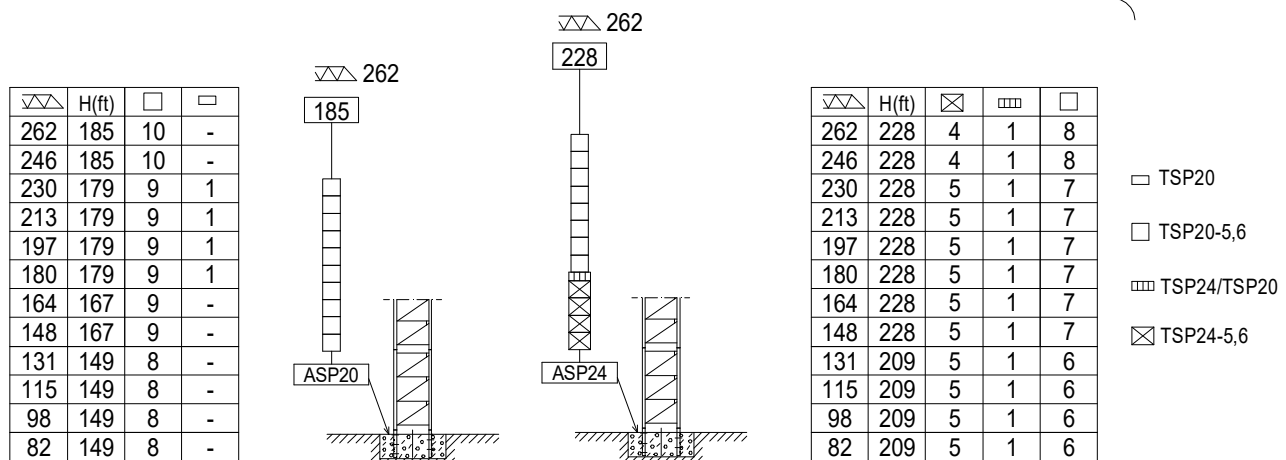
UNE 58-101
FEM 1001

UNE-EN-ISO 9001



H = Altura máxima bajo gancho sin arriostrar (ft).
Maximum height under hook without fastening (ft).

(H) ESTACIONARIA / STATIONARY



Fecha / Date: 16/01/2023



FEM 1001



Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice. This information is supplied without liability /



CARGAS / LOADS

J1400

 ST-SR (lb)		Cargas máximas / Maximum loads ST - SR – 70500 lb												
 70500 lb @ ... (ft)	[ft]	Alcance del gancho [ft] / Hook reach [ft]												
		66	82	98	115	131	148	164	180	197	213	230	246	262
262	107	70500	70500	70500	65400	56000	48700	42900	38100	34100	30700	27900	25300	23100
246	111	70500	70500	70500	67800	58100	50600	44500	39600	35500	32000	29000	26500	—
230	116	70500	70500	70500	70500	61300	53400	47100	42000	37600	34000	30900	—	—
213	119	70500	70500	70500	70500	63400	55300	48800	43500	39000	35300	—	—	—
197	121	70500	70500	70500	70500	64400	56200	49600	44200	39700	—	—	—	—
180	123	70500	70500	70500	70500	65800	57400	50700	45200	—	—	—	—	—
164	130	70500	70500	70500	70500	69900	61100	54000	—	—	—	—	—	—
148	137	70500	70500	70500	70500	70500	65000	—	—	—	—	—	—	—
131	131	70500	70500	70500	70500	70500	—	—	—	—	—	—	—	—
115	115	70500	70500	70500	70500	—	—	—	—	—	—	—	—	—
98	98	70500	70500	70500	—	—	—	—	—	—	—	—	—	—
82	82	70500	70500	—	—	—	—	—	—	—	—	—	—	—

 ST-DR (lb)		Cargas máximas / Maximum loads ST - DR – 141100 lb												
 141100 lb @ ... (ft)	[ft]	Alcance del gancho [ft] / Hook reach [ft]												
		66	82	98	115	131	148	164	180	197	213	230	246	262
262	56	118400	92100	74600	62100	52700	45400	39600	34800	30800	27400	24500	22000	19800
246	58	122600	95500	77400	64500	54800	47200	41200	36300	32200	28700	25700	23100	—
230	60	129000	100600	81600	68100	58000	50100	43800	38600	34300	30700	27600	—	—
213	62	133200	103900	84400	70500	60100	52000	45500	40100	35700	32000	—	—	—
197	63	135100	105500	85800	71700	61100	52800	46300	40900	36400	—	—	—	—
180	64	138000	107800	87600	73300	62500	54100	47400	41900	—	—	—	—	—
164	68	141100	114400	93200	78000	66600	57800	50700	—	—	—	—	—	—
148	72	141100	121500	99100	83100	71100	61700	—	—	—	—	—	—	—
131	79	141100	134800	110200	92600	79400	—	—	—	—	—	—	—	—
115	79	141100	134800	110200	92600	—	—	—	—	—	—	—	—	—
98	79	141100	134900	110200	—	—	—	—	—	—	—	—	—	—
82	80	141100	136700	—	—	—	—	—	—	—	—	—	—	—



Fecha / Date: 16/01/2023

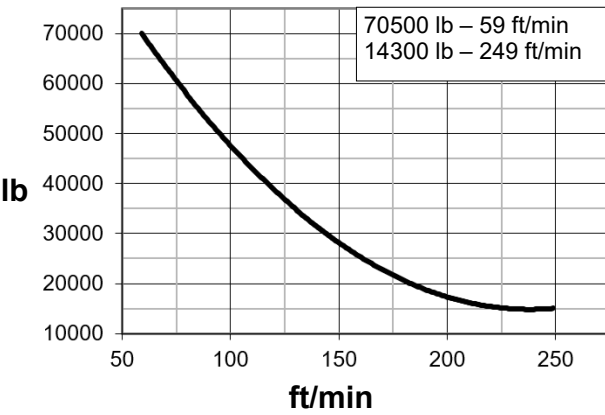
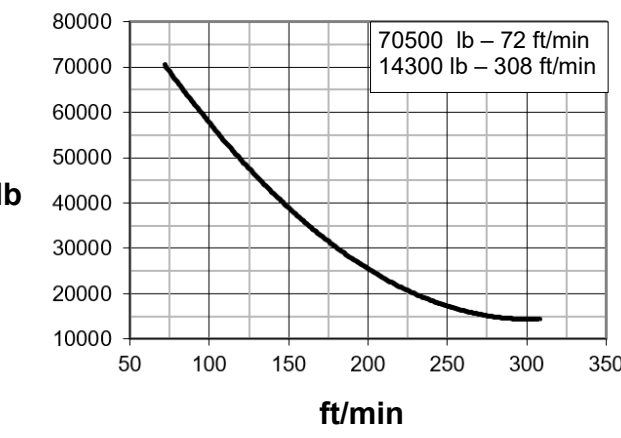
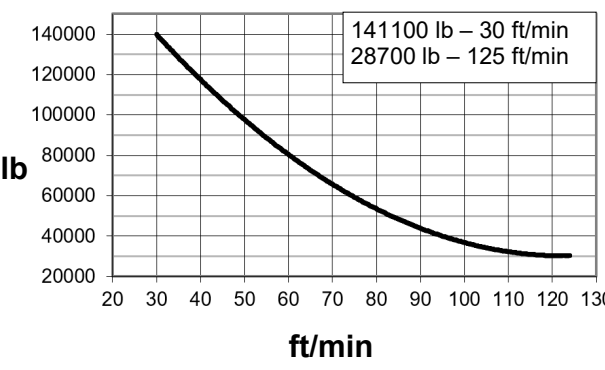
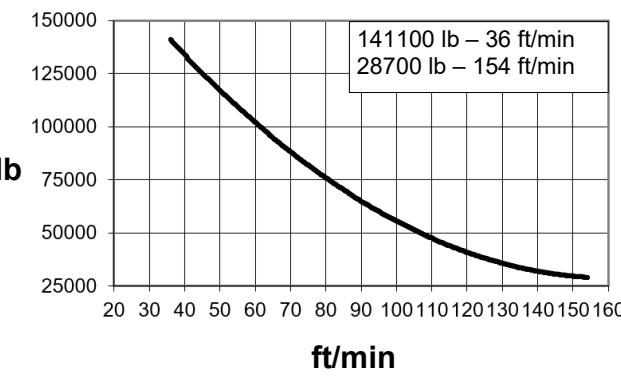

FEM 1001



Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice. This information is supplied without liability /



CARACTERISTICAS DE MECANISMOS / MECHANISMS FEATURES

J1400

*opcional *optional		
	EC15076VF 110 kW	*EC18094VF 132 kW
		
		

		 480V 60Hz	 
OG6007VF 3 x 15 kW	TC3360VF 24,3 kW	EC15076VF: AMPERAGE = 286 A EC18094VF: AMPERAGE = 318 A	
0...0,7 r/min sl/min	<u>70500 lb</u> 0...196 ft/min <u>141100 lb</u> 0...98 ft/min	 $H \leq$ SR DR 1496 ft 748 ft 3809 ft	



Fecha / Date: 16/01/2023














FEM 1001

Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice. This information is supplied without liability /



LISTA DE EMBARQUE / PACKING LIST

J1400

DENOMINACIÓN / DENOMINATION			L [ft]	A [ft]	H [ft]	P / W [Lb]
Torre Tower	TSP20		14.4	7.5	7.8	12380
	TSP20-5.6		20.2	7.5	7.8	16900
	TSP24-5.6		20.2	9.0	9.4	18290
Larguero largo. reducción Long crossbar. reduction	TSP24/TSP20		12.9	2.4	7.3	8430
Larguero corto reducción Short crossbar. reduction.	TSP24/TSP20		6.2	2.4	7.3	4125
Torre asiento pista + base punta de torre + orientación Slewing table + tower head base + slewing mechanism			17.0	8.0	8.3	47620
Punta de torre Tower head			18.3	7.3	7.3	16010
Tramo de pluma Jib section	PC22-11		35.7	7.6	8.7	19910
	PC22-12+tr		33.9	7.0	8.2	26900
	PC22-13		17.7	6.8	8.2	12435
	PC22-14		34.1	7.1	8.2	21300
	PC22-15		34.1	6.8	8.2	18080
	PPC22		4.0	7.7	9.6	1875
	PT22-16		34.0	6.8	8.1	9315
	PT22-17		33.9	6.8	8.1	7340
	PT22-18		33.9	6.8	8.1	5390
	PT22-19		17.5	6.8	8.1	3110
	PPT22		4.0	7.7	9.6	1765
Contrapluma Counterjib	CC18-1		24.6	7.1	3.7	12030
Contrapluma Counterjib	CC18-2		22.2	7.1	4.2	11015
Contrapluma Counterjib	CC18-3		17.9	6.9	2.2	5095
Contrapluma Counterjib	CC18-4		21.6	7.2	7.4	10695
Contrapluma + Mec. Elevación Counterjib + Hoisting Mech.	CC18-4 + EC		22.8	7.6	8.0	28605



Fecha / Date: 16/01/2023


FEM 1001

Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice. This information is supplied without liability /



LISTA DE EMBARQUE / <i>PACKING LIST</i>			J1400			
DENOMINACIÓN / <i>DENOMINATION</i>			L [ft]	A [ft]	H [ft]	P / W [Lb]
Polipasto <i>Hook assembly</i>	ST/DR		7.6	3.0	11.0	6440
Carro <i>Trolley</i>	ST/DR		12.1	7.9	7.6	5690
Soporte y elevación (sin cable) / <i>Support and hoisting (without rope)</i>			10.4	7.6	6.6	17915
Armario eléctrico y plataforma <i>Electrical cabinet and platform</i>			8.9	5.2	7.8	2095
Plataforma y cabina <i>Platform and cabin</i>			12.0	7.3	8.1	2450
TM20PASP-5.6						
Package 1.						
Transporte torre de montaje <i>Jacking cage transport</i>			38.1	7.3	8.2	26270
	Package 2.					
			38.3	6.6	8.2	31815
Contrapeso / <i>Counterweight</i>	Lastre / <i>Ballast</i>		12.5 12.5 12.5	1.9 0.9 0.6	4.9 4.9 4.9	13230 6615 4410

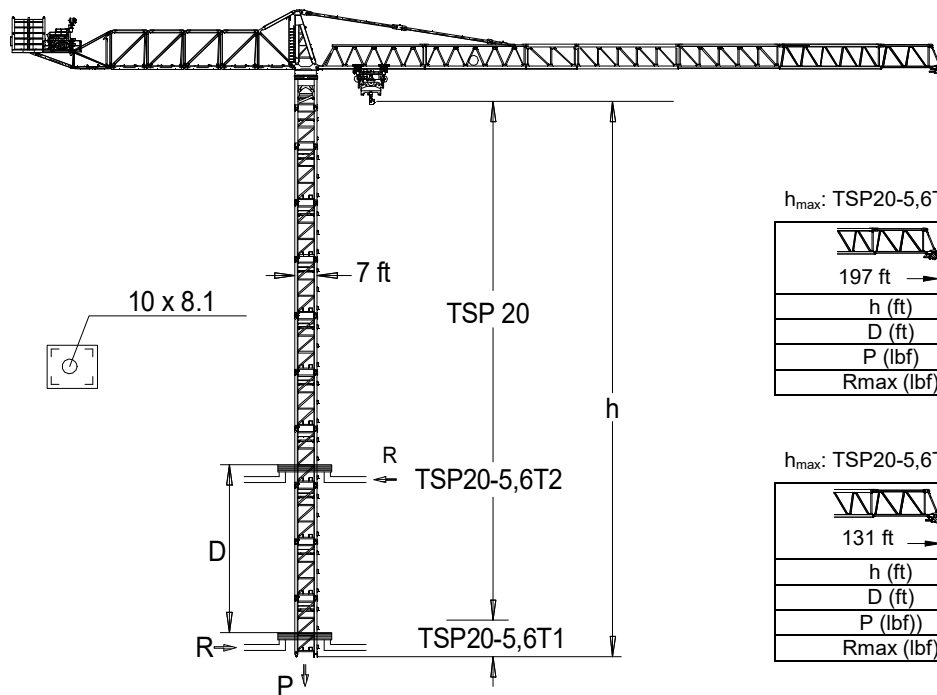


Fecha / Date: 16/01/2023



FEM 1001

Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice. This information is supplied without liability /



TSP20-5,6T1: 214.31.000
TSP20-5,6T2: 214.31.500



Trepado interno / Internal climbing

$$h_{\max}: \text{TSP20-5,6T1} + 7 \times \text{TSP20-5,6} + \text{TSP20-5,6T2} + \text{TSP20}$$

	▶	■
h (ft)	179	
D (ft)	35 – 85	
P (lbf)	846405	702525
Rmax (lbf)	200080	330470

$$h_{\max}: \text{TSP20-5,6T1} + 6 \times \text{TSP20-5,6} + \text{TSP20-5,6T2}$$

	▶	■
h (ft)	149	
D (ft)	39 – 69	
P (lbf)	763225	619350
Rmax (lbf)	202330	285510



Viento fuera de servicio / Out of service wind



Consultar / Consult



En servicio / In service



Fuera de servicio / Out of service



Ctra./Rd. Madrid - Irún Km.415 - 20.213 IDIAZABAL [Gipuzkoa] ESPAÑA / SPAIN
P.O. Box, 23 - 20.200 BEASAIN - E-mail: jaso@jaso.com
Tel. +34 943 - 18 70 00 • Fax. +34 943 - 18 70 20
www.jaso.com

Fecha / Date: 16/01/2023



FEM 1001

DELEGACION / DEALER

Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada
Subject to modification, without prior notice. This information is supplied without liability