




RELIABLE CRANE SERVICE

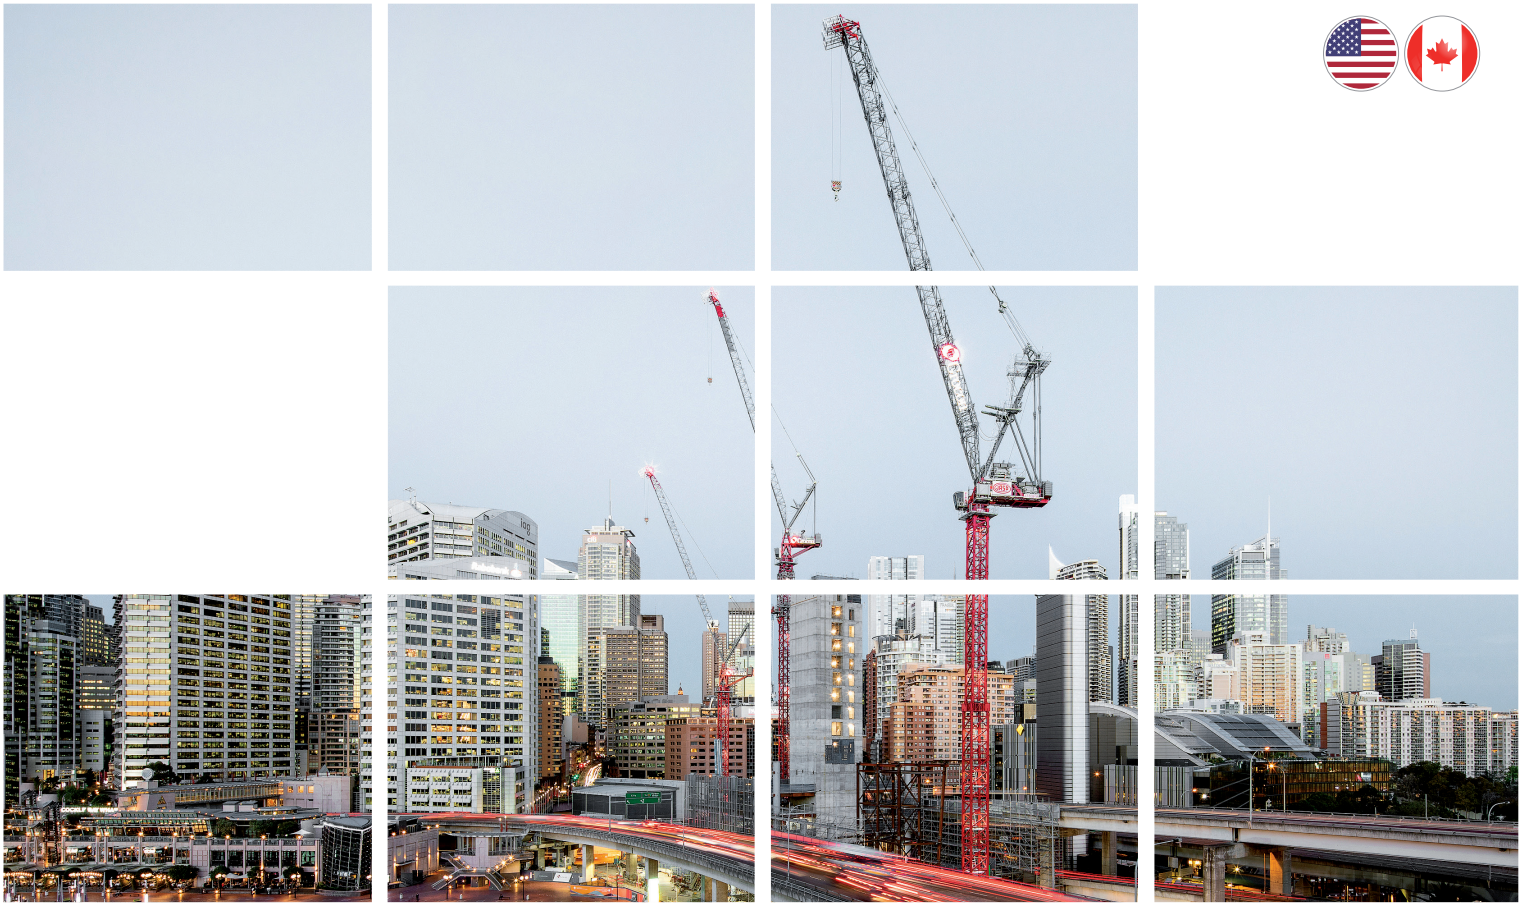

We **build** the cranes that **build** the world.

North America Range




(909) 222-0202

www.relaiblecraneservice.com

260 North Smith Ave. Corona, CA 92880



Product Range

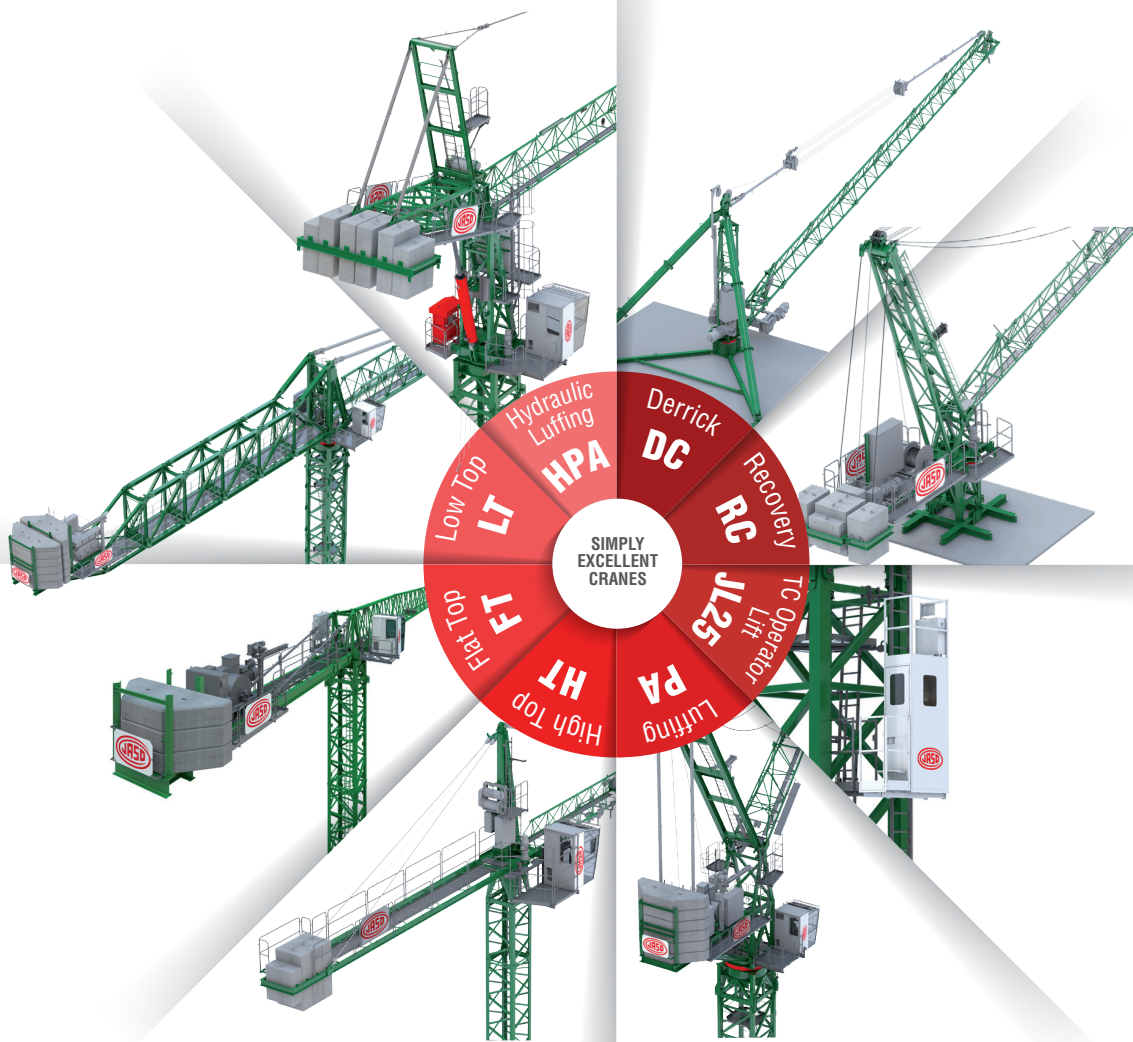

Follow us at:

www.jaso.com



JASO GROUP®



RELIABLE CRANE SERVICE



(909) 222-0202

www.relaiblecraneservice.com

260 North Smith Ave. Corona, CA 92880




GRUA TORRE TOWER CRANE

J560



UNE 58-101
FEM 1001


UNE-EN-ISO 9001

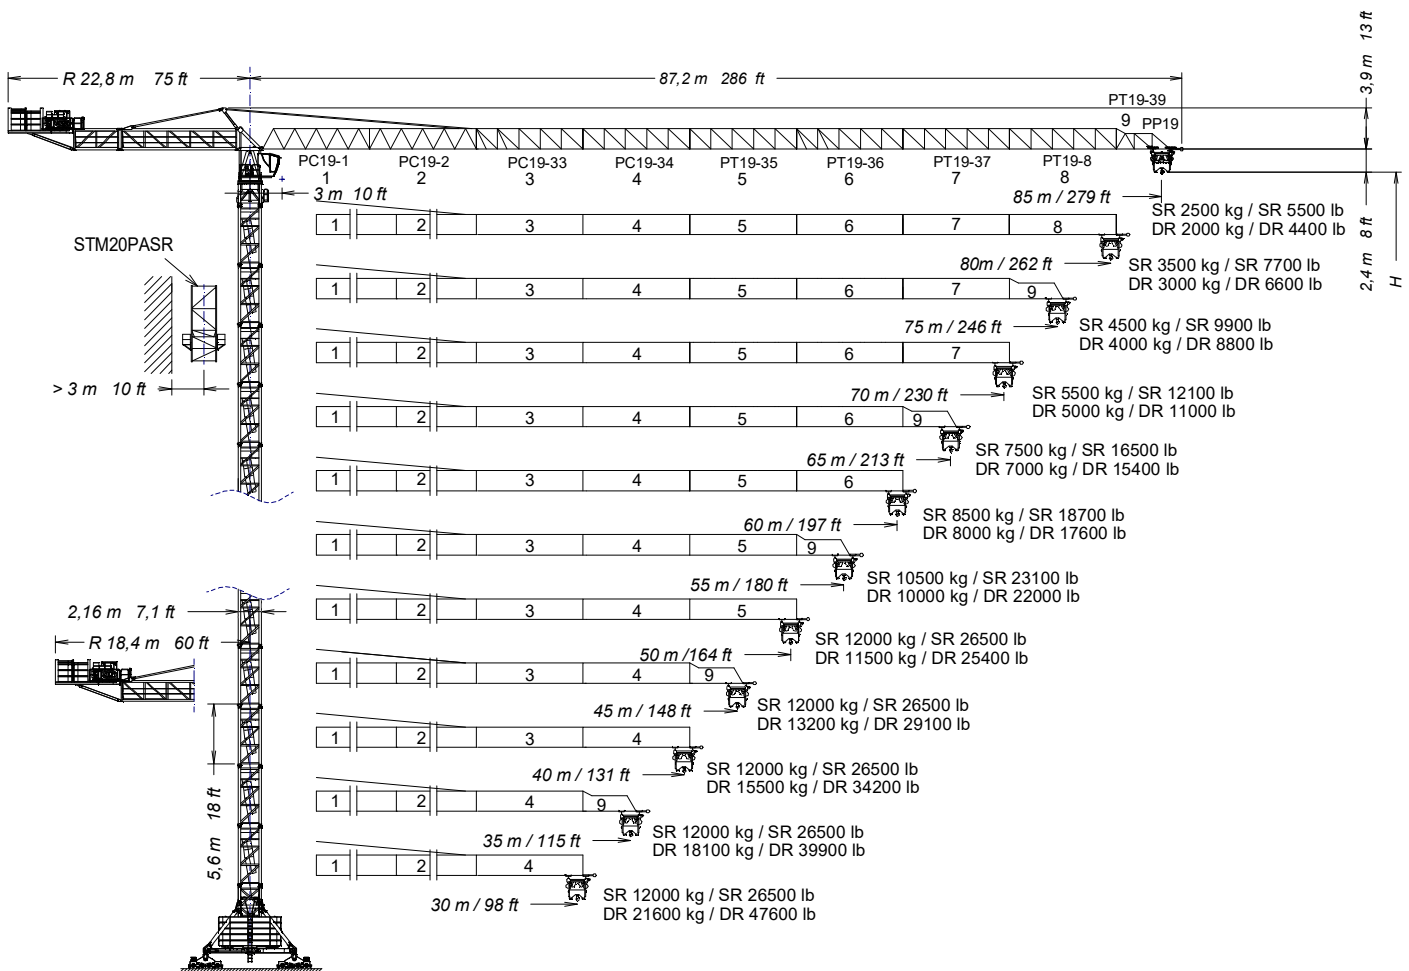

H = Altura máxima bajo gancho sin arriostrar (ft).
Maximum height under hook without fastening (ft).

(H) TRASLACIÓN / TRAVELLING

(H) ESTACIONARIA / STATIONARY

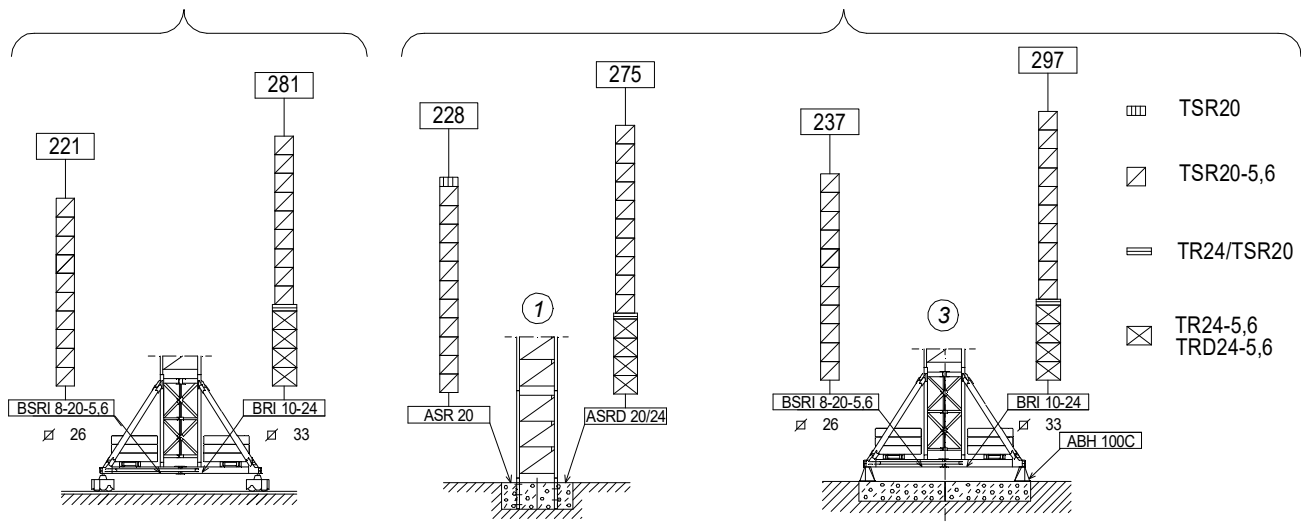

Fecha / Date: 16/01/2023

Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice. This information is supplied without liability



FEM 1001



CARGAS / LOADS

J560

ST-SR (lb)		Cargas máximas / Maximum loads ST-SR – 26500 lb												
[ft]	26500 lb @ ... (ft)	Alcance del gancho [ft] / Hook reach [ft]												
		82	98	115	131	148	164	180	197	213	230	246	262	279
279	91	26500	24000	19900	16800	14500	12600	11000	9700	8600	7700	6900	6100	5500
262	104	26500	26500	23500	20000	17300	15100	13300	11800	10500	9500	8500	7700	—
246	115	26500	26500	26500	22600	19600	17200	15200	13500	12100	11000	9900	—	—
230	124	26500	26500	26500	24600	21400	18800	16700	14900	13400	12100	—	—	—
213	145	26500	26500	26500	26500	25900	22900	20400	18300	16500	—	—	—	—
197	148	26500	26500	26500	26500	26500	23400	20900	18700	—	—	—	—	—
180	161	26500	26500	26500	26500	26500	25900	23100	—	—	—	—	—	—
164	164	26500	26500	26500	26500	26500	26500	—	—	—	—	—	—	—
148	148	26500	26500	26500	26500	26500	—	—	—	—	—	—	—	—
131	131	26500	26500	26500	26500	—	—	—	—	—	—	—	—	—
115	115	26500	26500	26500	—	—	—	—	—	—	—	—	—	—
98	98	26500	26500	—	—	—	—	—	—	—	—	—	—	—

 ST - DR [lb]		Cargas máximas / <i>Maximum loads</i> ST-DR – 52900 lb													
 [ft]	52900 lb @ ... (ft)	Alcance del gancho [ft] / <i>Hook reach [ft]</i>													
		66	82	98	115	131	148	164	180	197	213	230	246	262	279
279	49	37500	28900	23100	19000	15900	13500	11600	10000	8700	7500	6600	5800	5000	4400
262	55	43800	33900	27300	22600	19000	16200	14000	12300	10700	9500	8400	7400	6600	—
246	61	49000	38000	30700	25500	21600	18600	16100	14100	12500	11100	9900	8800	—	—
230	66	52900	41300	33400	27800	23600	20300	17700	15600	13800	12300	11000	—	—	—
213	77	52900	49400	40200	33600	28700	24900	21800	19300	17200	15400	—	—	—	—
197	78	52900	50400	41000	34400	29300	25400	22300	19800	17600	—	—	—	—	—
180	86	52900	52900	45200	37900	32500	28200	24800	22000	—	—	—	—	—	—
164	87	52900	52900	46100	38700	33100	28800	25400	—	—	—	—	—	—	—
148	88	52900	52900	46500	39100	33500	29100	—	—	—	—	—	—	—	—
131	89	52900	52900	47500	39900	34200	—	—	—	—	—	—	—	—	—
115	89	52900	52900	47500	39900	—	—	—	—	—	—	—	—	—	—
98	90	52900	52900	47600	—	—	—	—	—	—	—	—	—	—	—

LASTRES INFERIORES / LOWER BALLASTS


J560

BRI 10-24	H (ft)	262	281	297
	P (lb)	158700	185200	211640
BSRI 8-20-5,6	H (ft)	184	203	237
	P (lb)	211640	238100	264600

H: Altura bajo gancho / Height under hook

Para alturas intermedias tomar el lastre correspondiente a la altura superior / For intermediate heights take the ballast corresponding to the higher height

TREPADO / CLIMBING

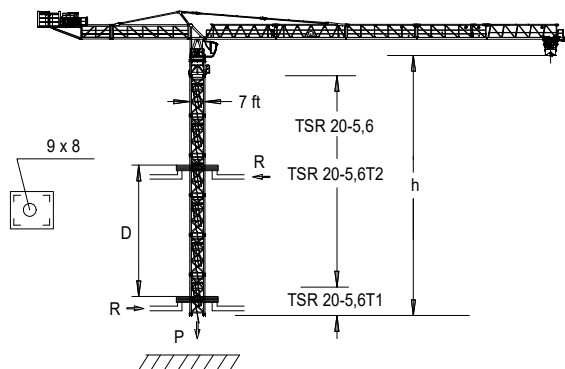J560


$$h_{\max} = \text{TSR20-5,6T1} + 8 \times \text{TSR20-5,6} + \text{TSR20-5,6T2}$$

	▶	■
h (ft)	197	
D (ft)	44 – 93	
P (lbf)	441750	387800
Rmax (lbf)	95550	181000

TSR20-5,6T1: 206.31.400

TSR20-5,6T2: 206.31.500

	Trepado interno / Internal climbing
--	-------------------------------------



Fecha / Date: 16/01/2023







FEM 1001



Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice. This information is supplied without liability



CARACTERISTICAS DE MECANISMOS / MECHANISMS





J560

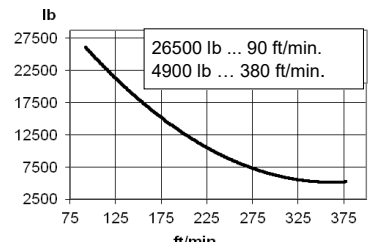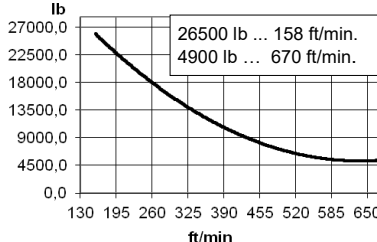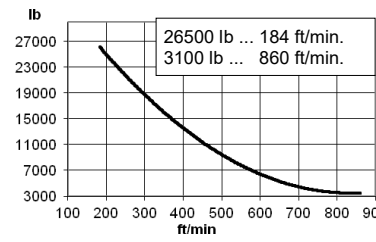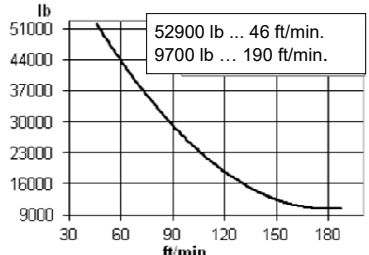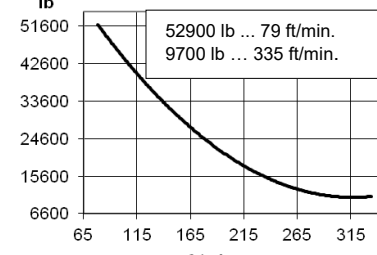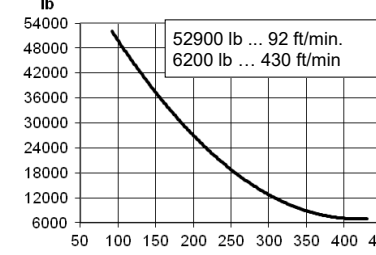*opcional *optional			
	EC88115VF 65 kW	*EC150205VF 110 kW	*EC180262VF 132 kW
			
			

				 480V 60Hz
TG4025VF 4 x 7,5 kW	OG4006VF 4 x 7,5 kW	TC15105VF 11 kW	TH4010 29,4 kW	EC88115VF: AMPERAGE = 182 A EC150205VF: AMPERAGE = 241 A EC180262VF: AMPERAGE = 279 A
0...82 ft/min	0...0,8 r/min sl/min	26500 lb 0...344 ft/min 52900 lb 0...171 ft/min	2 ft/min	 $H \leq$ SR 2782 ft DR 1391 ft  8596 ft
				 
				 ecoMode

LISTA DE EMBARQUE / PACKING LIST

J560













DENOMINACIÓN / DENOMINATION			L [ft]	A [ft]	H [ft]	P / W [lb]
Torre inferior Lower tower	TSRI-20-5,6 TRID24-5,6		19.7	7.4	7.4	15120
			19.7	9.8	9.8	18520
Torre Tower	TSR20 TSR20-5,6 TR24-5,6		14.0	7.4	7.4	6900
			19.7	7.4	7.4	9300
			19.7	9.1	9.3	10500
Torre desmontada Dismantled tower	TRD24-5,6		19.7	3.8	8.3	11650
Larguero largo, reducción Long crossbar, reduction	TR24/TSR20		13.0	2.0	6.0	5000
Larguero corto reducción Short crossbar, reduction	TR24/TSR20		6.3	2.0	6.0	2330

Fecha / Date: 16/01/2023

 **FEM 1001**


Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice. This information is supplied without liability

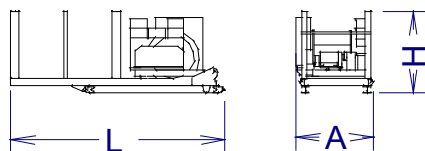

LISTA DE EMBARQUE / PACKING LIST				J560			
DENOMINACIÓN / DENOMINATION			L [ft]	A [ft]	H [ft]	P / W [lb]	
Torre asiento pista, torre superior y orientación <i>Slewing table, top tower and slewing mechanism</i>			29.2	7.6	8.1	37200	
Punta de torre <i>Top tower</i>			16.8	8.0	7.0	10900	
Torre asiento pista + base punta de torre + orientación <i>Slewing table + tower head base + slewing mechanism</i>			15.3	7.6	8.1	26300	
Tramo de pluma <i>Jib section</i>	PC19-1		33.7	6.1	7.3	9300	
	PC19-2+tr		33.7	5.2	7.9	11900	
	PC19-33		33.7	5.2	7.1	10900	
	PC19-34		33.7	5.2	7.2	9100	
	PT19-35		33.8	5.2	7.2	6100	
	PT19-36		33.8	5.2	7.2	4600	
	PT19-37		33.7	5.2	7.1	3800	
	PT19-8		33.7	5.2	7.1	3000	
	PT19-39		17.0	5.2	7.1	1700	
	PP19		4.3	6.1	2.1	705	
Tirante sostén pluma <i>Jib support tie</i>			31	3.7	2.2	7100	
Contrapluma III con mecanismos (sin cable) y plumin auxiliar <i>Counterjib III with mechanism (without rope), and auxiliary jib</i>			21.0	7.5	8.1	21200	
Contrapluma II <i>Counterjib II</i>			14.9	6.7	6.8	4950	
Contrapluma I <i>Counterjib I</i>			37.5	6.7	8.2	20200	
Polipasto <i>Hook assembly</i>	ST/DR		5.7	2.1	4.4	2300	
Carro <i>Trolley</i>	ST/DR		8.5	7.6	7.0	2500	
Plataforma y cabina <i>Platform and cabin</i>			13.1	6.3	7.7	3300	
Transporte torre de montaje <i>Jacking cage transport</i>		TM20PASR-5,6 	35.5	7.5	7.9	26800	
Contrapeso <i>Counterweight</i>	Lastre <i>Ballast</i>		12.5	1.9	4.9	13200	
			12.5	0.9	4.9	6600	
			12.5	0.6	4.9	4400	



Ctra./Rd. Madrid - Irún Km. 415 - 20.213 IDIAZABAL [Gipuzkoa] ESPAÑA / SPAIN
P.O. Box, 23 - 20.200 BEASAIN - E-mail: jaso@jaso.com
Tel. +34 943 - 18 70 00 • Fax. +34 943 - 18 70 20
www.jaso.com

Fecha / Date: 16/01/2023



FEM 1001

DELEGACION / DEALER

Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada.
Subject to modification, without prior notice. This information is supplied without liability.