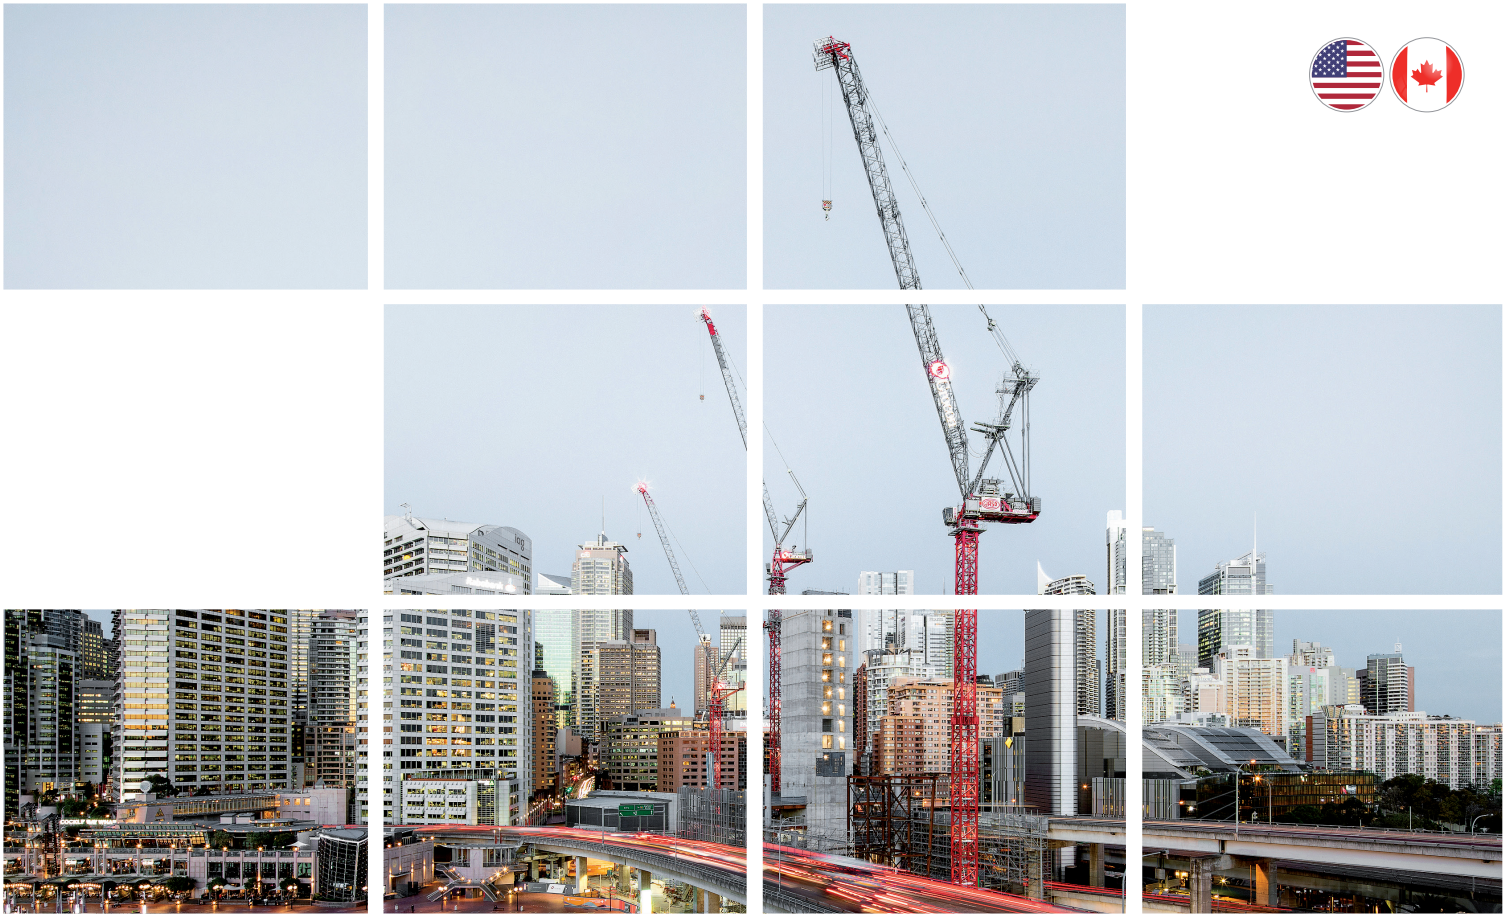




RELIABLE CRANE SERVICE



We **build** the cranes that **build** the world.

North America Range



(909) 222-0202

www.relaiblecraneservice.com

260 North Smith Ave. Corona, CA 92880



RELIABLE CRANE SERVICE



Product Range



Follow us at:

www.jaso.com



JASO GROUP®



RELIABLE CRANE SERVICE



**RC /
DC**



**TOWER
CRANES**

(909) 222-0202

www.relaiblecraneservice.com

260 North Smith Ave. Corona, CA 92880



GRUA TORRE
TOWER CRANE

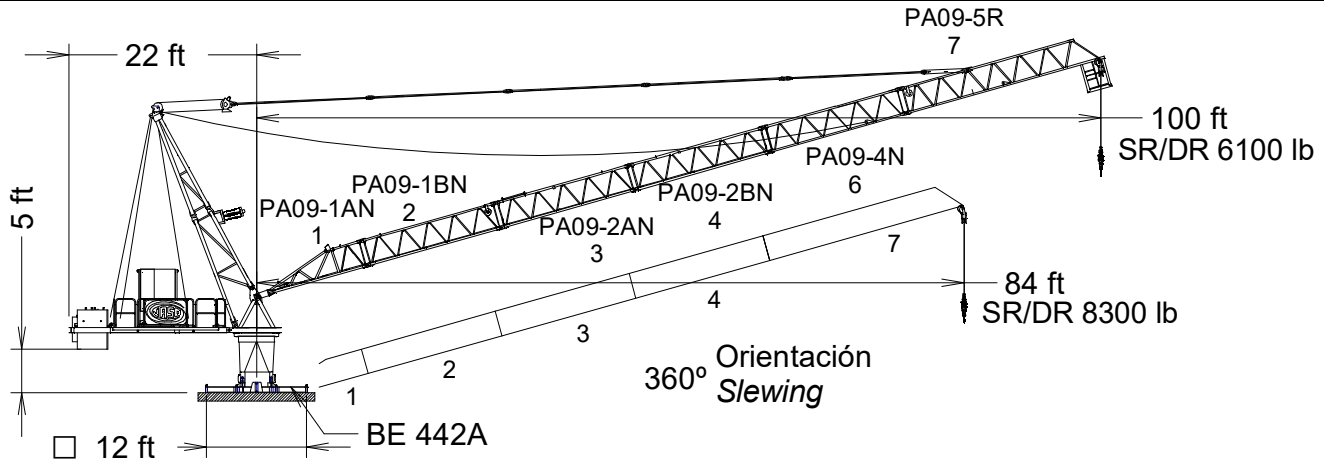
J80PA.RC



UNE 58-101
FEM 1001

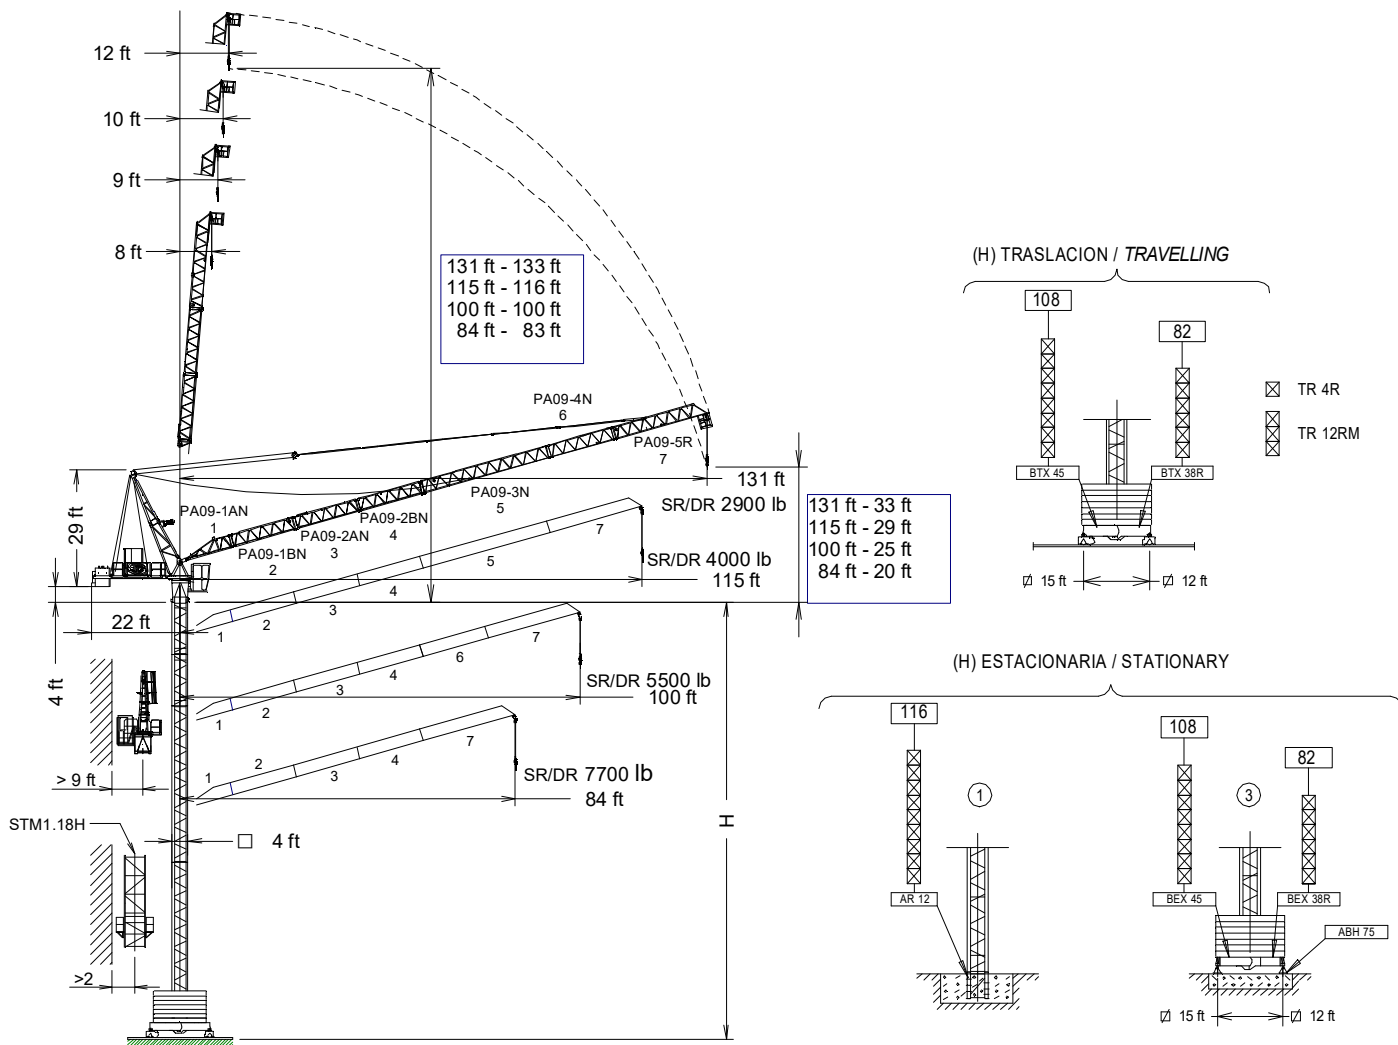
UNE-EN-ISO 9001

RECOVERY CRANE:



H_{SR} = Máxima altura de torre sin arriostrar (ft).
Maximum tower height without fastening (ft)

LUFFING CRANE:



Fecha / Date: 16/01/2023



FEM 1001

Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice. This information is supplied without liability





CARGAS / LOADS

J80PA.RC

RECOVERY CRANE:


SR / DR (lb)		Cargas máximas / Maximum loads SR / DR- 8800 / 17600 lb			
 [ft]	8800 / 17600 lb @ ... (ft)	Alcance del gancho [ft] / Hook reach [ft]			
		49	66	84	100
100	78/46	8800/16200	8800/11200	8300	6100
84	80/47	8800/16500	8800/11500	8300	—

LUFFING CRANE:

SR / DR (lb)		Cargas máximas / Maximum loads SR / DR - 5500 / 11000 lb				
 [ft]	5500 / 11000 lb @ ... (ft)	Alcance del gancho [ft] / Hook reach [ft]				
		66	84	100	115	131
131	95/60	5500/9700	5500/6900	5200	3900	2900
115	96/60	5500/9800	5500/7100	5300	4000	—
100	100/62	5500/10200	5500/7500	5500/5500	—	—
84	84/64	5500/10700	5500/7700	—	—	—

CARACTERISTICAS DE MECANISMOS / MECHANISMS FEATURES

J80PA.RC

*opcional *optional						
	RECOVERY CRANE EC3360VF 24,3 kW	LUFFING CRANE EC3360VF 24,3 kW	OG608VF 4 kW	EP2515VF 18,4 kW	2,8/ 3,8 / 4,5 m TG825VF 2x3 kW	TH1010 9,2 kW
 lb ft/min	4400 8800 0...197 0...98	4400 5500 0...197 0...157	0...0,8 r/min sl/min	1,5 min	0...82 ft/min	3 ft/min
 lb ft/min	8800 17600 0...98 0...49	8800 11000 0...98 0...79				
 H	H ≤ SR 2625 ft DR 1312 ft		 6407 ft			
 480V 60Hz EC3360VF: AMPERAGE = 93 A						
 						

LASTRES INFERIORES / LOWER BALLASTS

J80PA.RC

H (ft)		31	56	82	108
BEX 45 / BTX 45	 9000 lb	8	10	12	14
BEX 38R / BTX 38R		10	12	14	—

H: Altura bajo gancho / Height under hook

Para alturas intermedias tomar el lastre correspondiente a la altura superior / For intermediate heights take the ballast corresponding to the higher height



Fecha / Date: 16/01/2023















 FEM 1001

Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice. This information is supplied without liability



LISTA DE EMBARQUE / PACKING LIST

J80PA.RC

DENOMINACIÓN / DENOMINATION			L [ft]	A [ft]	H [ft]	P / W [lb]
Torre Tower	TR 8RM		26.5	3.9	3.9	5680
	TR 12RM		39.4	3.9	3.9	8190
	TR 4R		13.6	3.9	3.9	3155
Torre asiento pista + base punta de torre + orientación Slewing table + tower head base + slewing mechanism			11.2	5.3	6.4	5270
Punta de torre 1 Tower head 1			14.5	3.5	3.4	2075
Punta de torre 2 Tower head 2			14.9	3.0	4.8	1865
Tramo de pluma Jib section	PA09-1AN (1)		13.0	3.4	4.0	1000
	PA09-1BN (2)		17.1	2.8	3.4	795
	PA09-2AN (3)		17.1	2.8	3.4	820
	PA09-2BN (4)		17.1	2.8	3.4	650
	PA09-3N (5)		33.2	2.8	3.5	1170
	PA09-4N (6)		17.1	2.8	3.5	610
	PA09-5R (7)		24.5	2.8	3.9	1235
Plataforma de punta de pluma Jib end platform			5.6	2.4	4.4	160
Punta de pluma Jib end			2.7	0.9	2.2	195
Polipasto Hook assembly			4.2	1.2	4.0	1630
Tirante sostén pluma Jib support tie			16.7	1.2	1.0	630
Contrapluma con plataformas Counterjib with platforms			18.4	8.4	0.8	1765
Contrapluma con plataformas, armario eléctrico y mecanismos Counterjib with platforms, electric control cupboard and mechanisms			19.1	8.4	7.4	8810
Mecanismos Mechanisms	Elevación carga / Hoisting Elevación pluma / Luffing		6.3	4.3	2.8	2610
			6.2	4.1	2.5	1990
Plataforma y cabina Platform and cabin			12.3	5.4	7.7	1810
Lastre Ballast			13.1	1.1	4.3	9040
Torre de montaje Jacking cage		TM 1.18H	23.4	5.8	5.6	7055
Torre de montaje sin puerta+ carro+plataforma carro+ viga de apoyo Jacking cage without door+ trolley+ trolley platform+beam assembly			23.4	5.8	5.6	5400



Fecha / Date: 16/01/2023

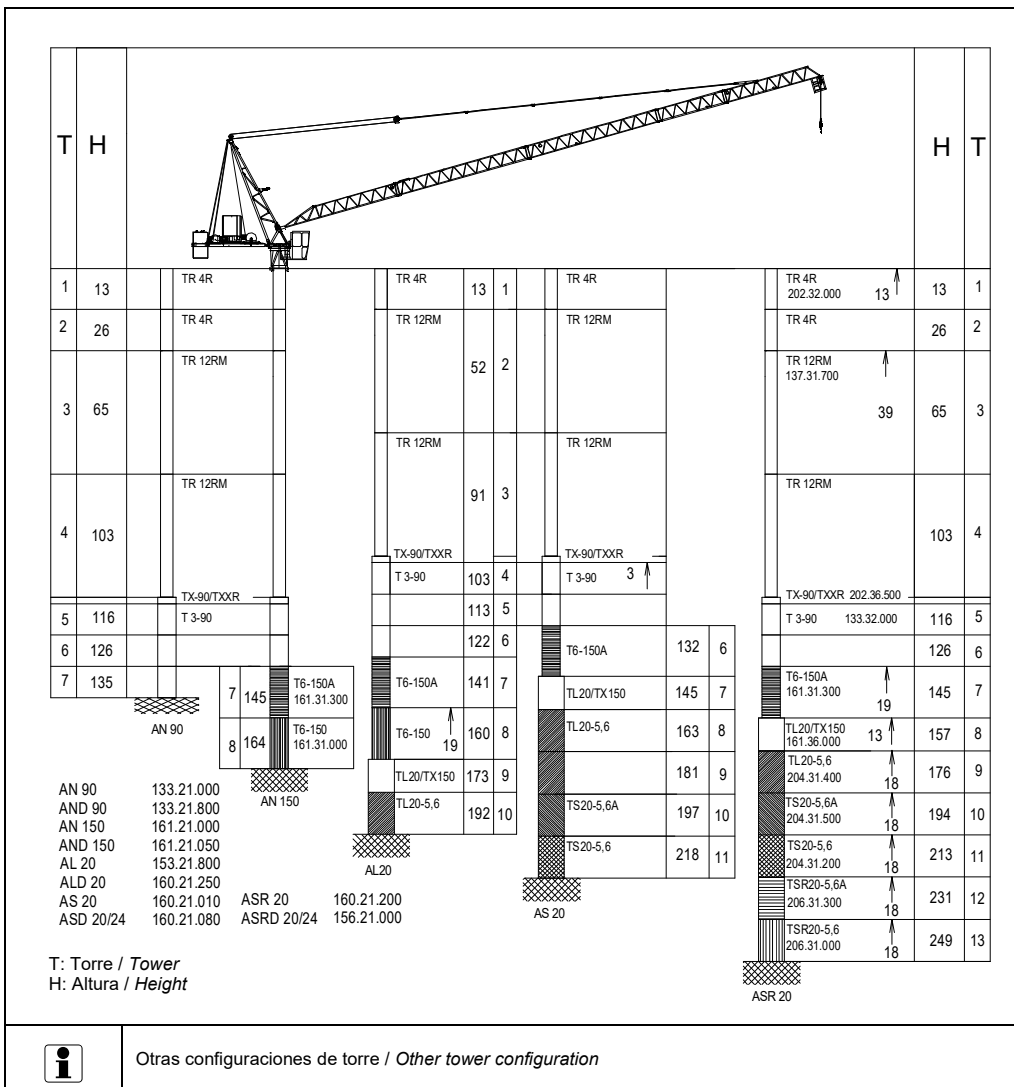
 **FEM 1001**

Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice. This information is supplied without liability

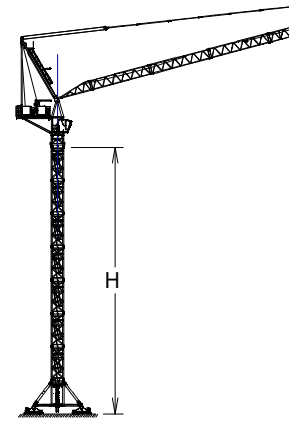


COMPOSICIONES DE TORRE / TOWER COMPOSITIONS

J80PA.RC



Transporte / Transport



H = 108 ft + BTX45

3x

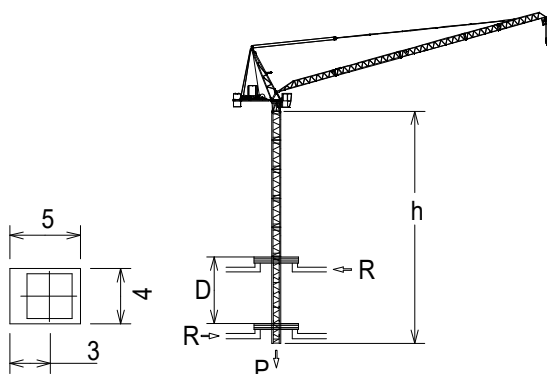


4x

HIGH CUBE 40'

TREPADO / CLIMBING

J80PA.RC



$h_{max} = 3 \times TR4RT + 6 \times TR4R$

	▶	■
h (ft)	117	
D (ft)	21 - 33	
P (lbf)	95100	83900
Rmax (lbf)	45000	490600

TR4RT: 800.32.100



Trepado interno / Internal climbing



Viento fuera de servicio / Out of service wind



Consultar / Consult



En servicio / In service



Fuera de servicio / Out of service



Ctra./Rd. Madrid - Irún Km. 415 - 20.213 IDIAZABAL [Gipuzkoa] ESPAÑA / SPAIN
P.O. Box, 23 - 20.200 BEASAIN - E-mail: jaso@jaso.com
Tel. +34 943 - 18 70 00 • Fax. +34 943 - 18 70 20
www.jaso.com

Fecha / Date: 16/01/2023



FEM 1001

DELEGACION / DEALER

Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice.
This information is supplied without liability