





AP308

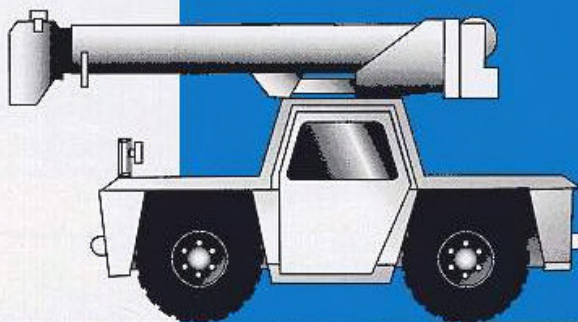

Material Handling Hydraulic Crane

ap3081 (681x1104x24b jpeg)

Dimensions

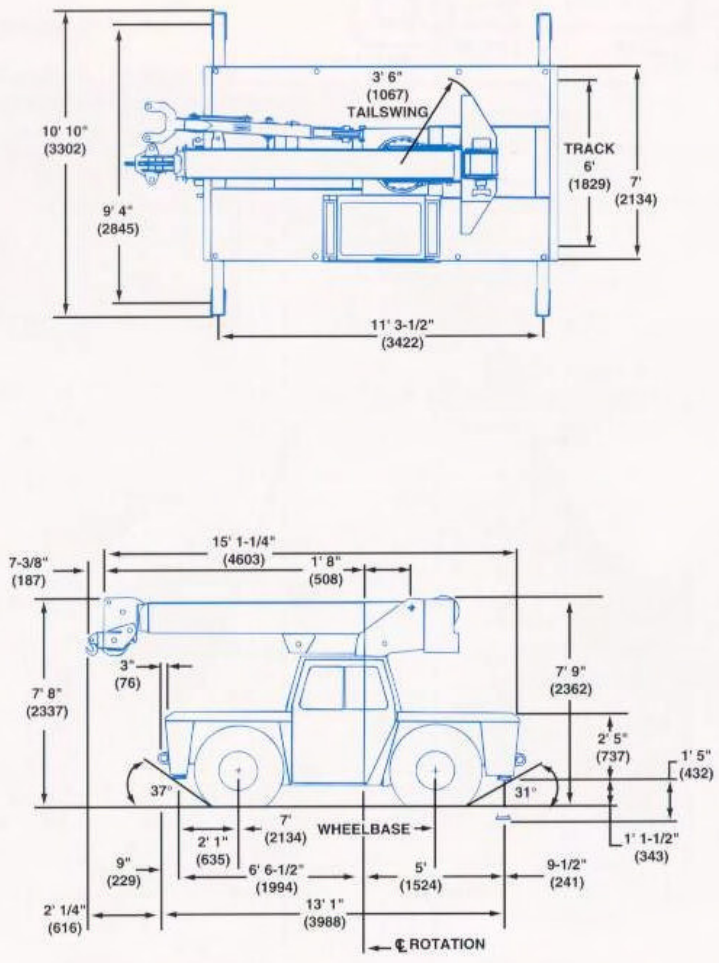

- Turning Radius 15' 3" (4658 mm)
- Front Axle Load 6,731 lbs. (3053 kg)
- Rear Axle Load 8,730 lbs. (3960 kg)
- Gross Vehicle Weight 15,461 lbs. (7013 kg)



ap3083 (773x1132x24b jpeg)

Working Range





10.5 - 24 ft.
(3.2 - 7.3 m)



10 - 15 ft. 9 in.
(3.05 - 4.8 m)



360°

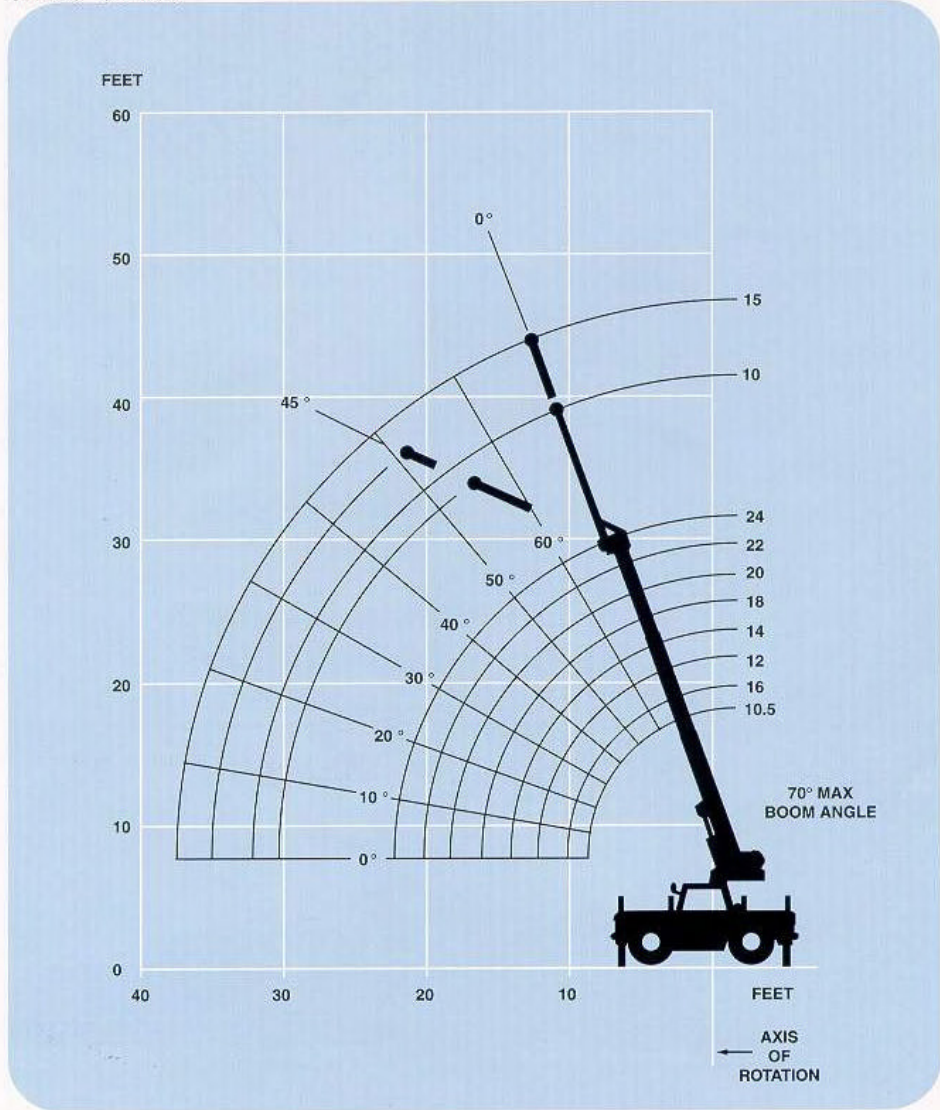

DIMENSIONS ARE FOR LARGEST GROVE FURNISHED HOOK BLOCK AND HEADACHE BALL, WITH ANTI-TWO BLOCK ACTIVATED.

ap3084 (790x1132x24b jpeg)

Superstructure specifications

Boom

10.5 ft. - 24 ft. (3.2 m - 7.3 m) three-section full power boom.
Maximum tip height: 29 ft. (8.8 m).

Fixed Swingaway Extension

10 ft. (3.05 m) swingaway extension. Offsettable at 0° or 45°. Stows alongside base boom section.
Maximum tip height: 39 ft. (11.9 m).

*Optional Telescopic Swingaway Extension

10 ft. - 15 ft. (3.05 m - 4.5 m) telescoping swingaway extension. Offsettable at 0° or 45°. Stows alongside base boom section.
Maximum tip height: 44 ft. (13.4 m).

Boom Nose

Two lower steel sheaves and one idler sheave mounted on bronze bushings with removable pin-type rope guards.

*Optional Searcher Hook

Boom nose mounted. 3,000 lbs. (1316 kg) capacity.

Boom Elevation

One double acting hydraulic cylinder with integral holding valve provides elevation from 0° to 70°.

Load Moment & Anti-Two Block System

Standard load moment and anti-two block system with audio-visual warning and control lever lockout. These systems provide electronic display of boom angle, length, radius, tip height, relative load moment, maximum permissible load and load indication and warning of impending two-block condition.

Cab

Standard frame mounted control station includes all crane function and driving controls, engine monitoring instrumentation and deluxe fabric seat with seat belt. Standard full vision, all steel fabricated enclosed cab with tinted safety glass throughout. Dash panel incorporates gauges for all engine functions. Other features include skylight, sliding left & right side windows, electric windshield washer-wiper, circulating air fan and fire extinguisher.

Swing

Ball bearing swing circle with 360° continuous rotation. Grove planetary glide-swing with automatic type multi-disc brake.
Maximum speed: 1.5 RPM.

Counterweight

2,100 lbs. (952 kg) integral with superstructure.

Hydraulic System

Two main gear pumps with a combined capacity of 54.4 GPM (205.7 LPM), driven by carrier engine through PTO.

Two individual valve banks.

Return line type filter with full flow by-pass protection and service indicator. Three micron rated replaceable cartridge.

30 gallon (114 L) reservoir.

Remote-mounted oil cooler with thermostatically controlled electric motor driven fan.

System pressure test ports with quick release type fittings for each circuit.

HOIST SPECIFICATIONS

Main and Auxiliary Hoist

Planetary reduction with automatic spring applied multi-disc brake and hoist drum cable followers.

Maximum Single Line Pull:	9,580 lbs. (4345 kg)
Maximum Single Line Speed:	145 FPM (44 m/min)
Maximum Permissible Line Pull:	7,400 lbs. (3356 kg)
Rope Diameter:	9/16 in. (14 mm)
Rope Length:	130 ft. (39.6 m)
Maximum Rope Stowage:	181 ft. (55.2 m)

**Denotes optional equipment*

ap3085 (742x1132x24b jpeg)

Carrier specifications

Chassis

High strength alloy steel construction with integral outrigger housings and front/rear lifting, towing and tie down lugs.

Carry deck with surface area of 62 sq. ft. (5.8m²)

Outrigger System

Front and rear oblique type telescoping beams at all four corners with integral holding valves. Outrigger pads are an integral part of the beam and have a surface area of 72 sq. in. (464 cm²).

Maximum outrigger pad load 15,000 lbs. (6804 kg).

Outrigger Controls

Controls and crane level indicator located in cab.

Engine

Cummins 4B3.9L diesel, four cylinders, 76 bhp (57 kW) (Gross) @ 2,500 RPM.

Maximum torque: 184 ft. lbs. (250 Nm) @ 1,200 RPM.

*Optional Engine

Continental TM 2.7L, four cylinders, 2.7L gasoline engine, 66 bhp (49 kW) (Gross) @ 2,800 RPM.

Maximum torque: 144 ft. lbs. (195 Nm) @ 1,800 RPM.

Fuel Tank Capacity

30 gallons (114 L)

Transmission

Automatic with 3 speeds forward and 1 reverse with torque converter.

Electrical System

One 12 V - maintenance free battery. 12 V starting.

Drive

4 x 2

Steering

Rear: Full hydraulic power, controlled by steering wheel.

Axles

Front: Drive-type with no spin differential and planetary reduction hubs rigid mounted to chassis.

Rear: Steer-type rigid mounted to frame.

Brakes

Hydraulic drum and shoe type acting on front drive wheels. Mechanical hand lever actuated parking brake.

Tires

10.00 x 15-16 PR tube type, deep mine lug.

Lights

Full lighting package including turn indicators, head, tail, brake and hazard warning lights.

Maximum Speed

17 MPH (27 kph) with automatic transmission.

*29 MPH (46.7 kph) with manual transmission.

Gradeability (Theoretical)

65.6% (Based on 15,461 lbs. [7013 kg] GVW).

Miscellaneous Standard Equipment

Dual rear view mirrors, hookblock tiedown sling, electronic back-up alarm, light package and stowage well.

*Optional Equipment

- * Worklights
- * 360° Flashing light
- * Cab spotlight
- * Tachometer
- * Cold start aid (less canister)
- * Engine block heater
- * Maintenance platform
- * Hookblocks
- * Tow winch
- * Tool kit
- * Pintle hook front/rear
- * Carry deck posts
- * LP gas conversion kit (less bottle)
- * Engine low oil pressure/high water temperature A/V warning system
- * Spark arrestor muffler
- * Sound suppression kit
- * Hot water heater and forced air defroster
- * Optional hydraulic brakes acting on all four wheels.
- * Manual Transmission 4 x 4

**Denotes optional equipment*



ap3086 (755x1132x24b jpeg)

10 - 24 ft. (3.2 - 7.3 m)	2,100 lbs. (952 kg)	100%
	85% Domestic (Pounds)	
(Feet)	Over Front	360°
5	17,000	17,000
6	15,000	15,000
8	13,000	13,000
10	11,000	11,000
12	9,500	9,500
14	8,100	7,180
16	6,900	5,740
18	5,900	4,750
20	5,150	4,040
22	4,590	3,500

A6-829-007960A


10 - 24 ft. (3.2 - 7.3 m)	2,100 lbs. (952 kg)	10.00 x 15 - 16 PR	
	75% Domestic (Pounds)		
(Feet)	Stationary Capacity Defined Arc Over Front	Stationary Capacity 360° Arc	Pick & Carry Capacity Up to 2.5 mph Boom Centered Over Front
4	17,000	14,700	15,000
5	17,000	10,600	13,800
6	15,000	9,260	12,450
7	14,000	7,380	11,100
8	12,700	5,920	10,000
10	7,920	4,170	7,920
12	5,680	3,160	5,680
14	4,450	2,500	4,450
16	3,520	2,040	3,520
18	2,920	1,700	2,920
20	2,480	1,430	2,480
22	2,130	1,220	2,130

A6-829-007981B

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.



ap3087 (747x1132x24b jpeg)

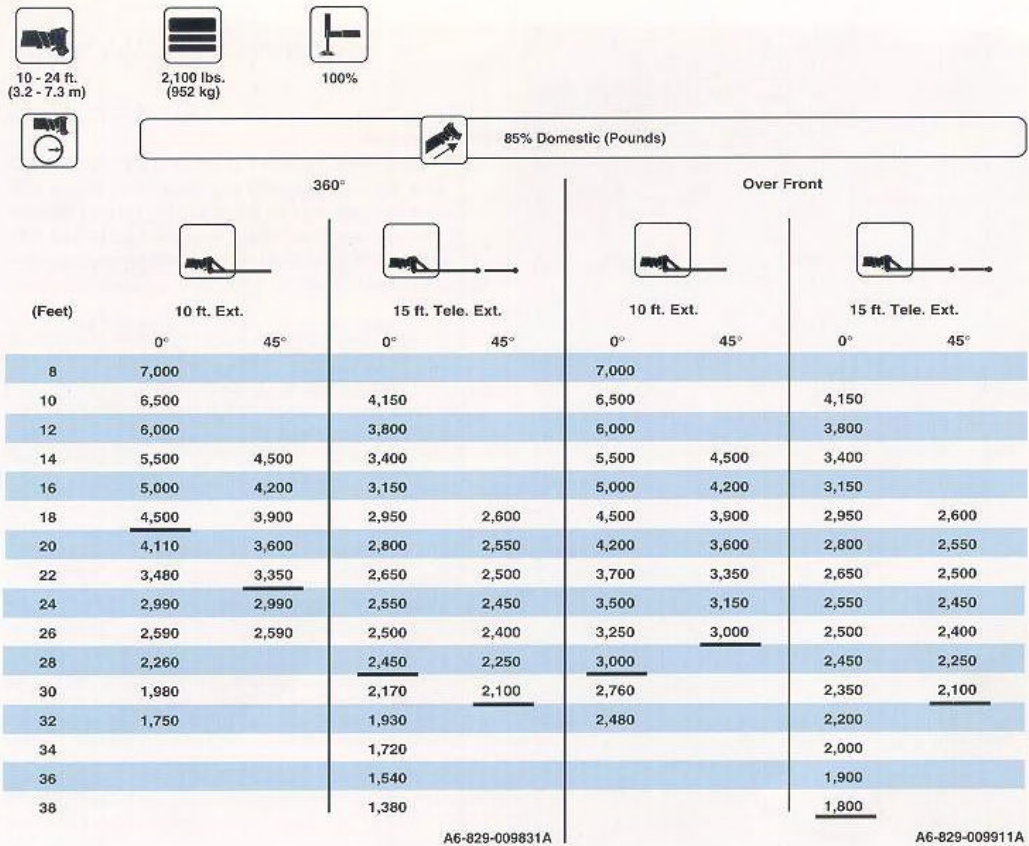


THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

AP308 7



ap3088 (760x1132x24b jpeg)



10 - 24 ft.
(3.2 - 7.3 m)



2,100 lbs.
(952 kg)



Rubber
10.00 x 15 - 16 PR

75% Domestic (Pounds)

(Feet)	360°				Defined Arc Over Front				
	10 ft. Ext.		15 ft. Tele. Ext.		10 ft. Ext.		15 ft. Tele. Ext.		
	0°	45°	0°	45°	0°	45°	0°	45°	
8	6,110					7,000			
10	4,260		4,150			6,500		4,150	
12	3,190		3,430			6,000		3,800	
14	2,490	2,490	2,700			4,570	4,500	3,400	
16	2,010	2,010	2,180			3,630	3,630	3,150	
18	1,640	1,640	1,790	1,790		2,970	2,970	2,950	2,600
20	1,360	1,360	1,500	1,500		2,480	2,480	2,550	2,550
22	1,140	1,140	1,260	1,260		2,100	2,100	2,180	2,180
24	960	960	1,070	1,070		1,800	1,800	1,890	1,890
26	810	810	910	910		1,560	1,560	1,650	1,650
28	690		780	780		1,360		1,450	1,450
30	580		660	660		1,180		1,280	1,280
32	480		560	560		1,040		1,140	1,140
34			480					1,020	
36			400					910	
38			330					810	

A6-829-009832B

A6-829-009917B

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

ap3089 (755x1132x24b jpeg)

Rated Lifting Capacities



































IMPORTANT NOTES:

WARNING: THIS CHART IS ONLY A GUIDE.

The notes below are for illustration only and should not be relied upon to operate the crane. The individual crane's load chart, operating instructions and other instruction plates must be read and understood prior to operating the crane.


1. All rated loads have been tested to and meet minimum requirements of SAE J1063 OCT90 - Cantilevered Boom Crane Structures - Method of Test, and do not exceed 85% of the tipping load on outriggers fully extended 75% tipping on rubber, as determined by SAE J765 OCT90 Crane Stability Test Code.
2. Rated loads include the weight of hookblock, slings and auxiliary lifting devices and their weights shall be subtracted from the listed rating to obtain the net load to be lifted. When more than the minimum required hoist reeving is used, the additional rope weight shall be considered part of the load to be handled.
3. Defined Arc $\pm 6^\circ$ on either side of longitudinal centerline of machine.
4. Capacities appearing above the bold line are based on structural strength and tipping should not be relied upon as a capacity limitation.
5. All capacities are for crane on firm, level surface. It may be necessary to have structural supports under the outrigger floats or tires to spread the load to a larger bearing surface.
6. When either boom length or radius or both are between values listed, the smallest load shown at either the next larger radius or boom length shall be used.
7. Tires shall be inflated to the recommended pressure before lifting on rubber.
8. For outrigger operation, ALL outriggers shall be properly extended with tires raised free of ground before raising the boom or lifting loads.

Symbols Glossary

	Frame		Steering
	Outriggers		Transmission
	Outrigger Controls		Axles
	Engine		Brakes
	Fuel Tank Capacity		Tires
	Electrical System		Suspension
	Drive		360° Rotation
	Lights		Boom Elevation
	Cab		Swing
	Boom		Counterweight
	Fixed Swingaway		Oil
	Tele-Swingaway		Hydraulic System
	Jib		Hoist
	Boom Nose		Radius
	Boom Extension		Boom Length
	Speed		Hookblock
	Grade		Gear
	Lattice Extension		Luffing Jib

AP308

ap30810 (764x1081x24b jpeg)

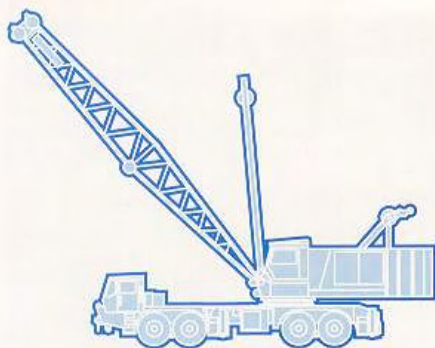

Grove Worldwide – World Headquarters

Grove North America
 1565 Buchanan Trail East
 P.O. Box 21
 Shady Grove, Pennsylvania 17256, U.S.A.
 Tel: [Int + 1] (717) 597-8121
 Fax: [Int + 1] (717) 597-4062
 Western Hemisphere, Asia/Pacific

Grove Europe Limited*

Sunderland SR4 GTT, England
 Tel: [Int + 44] 191 565-6281
 Fax: [Int + 44] 191 564-0442
 Europe, Africa, Middle East

Grove Europe Limited*

P.O. Box No. 268
 4A Kimber Road
 Abingdon, Oxfordshire, OX141SG
 Tel: [Int + 44] 1235 55-3184
 Fax: [Int + 44] 1235 55-3218

Deutsche Grove GmbH

Sales and Service
 Helmholtzstrasse 12, Postfach 5026
 D-40750 Langenfeld, Germany
 Tel: [Int + 49] (2173) 8909-0
 Fax: [Int + 49] (2173) 8909-30

Wilhelmshaven Works

Industriegelände West, Postfach 1853
 D-26358 Wilhelmshaven, Germany
 Tel: [Int + 49] (4421) 294-0
 Fax: [Int + 49] (4421) 294-301

Grove France S.A.

16, chaussée Jules-César, 95520 OSNY
 B.P. 203, 95523 CERGY PONTOISE CEDEX
 France
 Tel: [Int + 33] (1) 30313150
 Int: [Int + 33] (1) 30386085

*Grove Europe Limited, Registered in England,
 Number 1845128, Registered office, Crown Works,
 Pallion, Sunderland, Tyne & Wear, England SR4 6TT

Grove Asia/Pacific - Regional Office

171 Chin Swee Road
 #06-01 San Centre
 Singapore 0316
 Tel: [Int + 65] 536-6112
 Fax: [Int + 65] 536-6119
 Asia/Pacific, Near East

Grove China - Representative Office

Beijing Hotel Room 6074
 No. 33 East Chang An Avenue
 Beijing, 100004, China
 Tel: [Int + 86] (10) 513-7766
 Fax: [Int + 86] (10) 513-7307

Grove Product Support

Western Hemisphere, Asia/Pacific
 1086 Wayne Avenue
 Chambersburg, Pennsylvania USA
 Tel: [Int + 1] (717) 263-5100
 Fax: [Int + 1] (717) 267-0404

Europe, Africa, Middle East
 Sunderland SR4 6TT, England
 Tel: [Int + 44] 191 565-6281
 Parts Fax: [Int + 44] 191 510-9242
 Service Fax: [Int + 44] 191 510-9560

Constant improvement and engineering progress make it necessary that we reserve the right to make specification, equipment, and price changes without notice. Illustrations shown may include optional equipment and accessories and may not include all standard equipment.

Distributed By:

Bigge Crane and Rigging Co.

10700 Bigge Avenue
 San Leandro, CA 94577
 Phone: (888) 337-BIGGE or (510) 638-8100
 Fax: (510) 639-4053
 Email: info@bigge.com
 Web site: www.bigge.com