




LINDEN 500

**LC 3510** 


11,020 lbs.

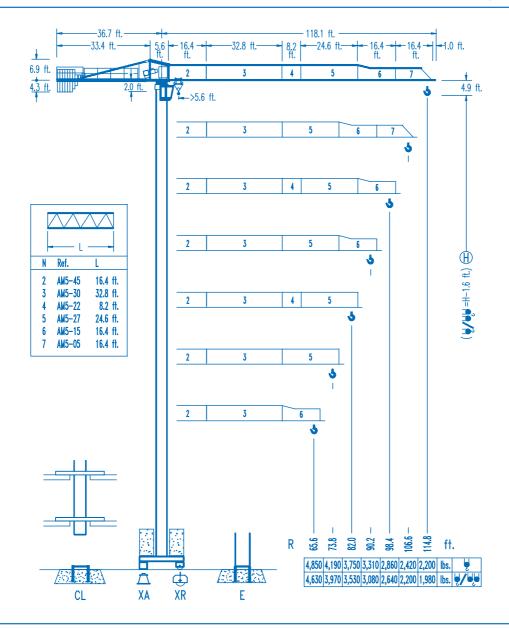



**C€** DIN 15018 H1 B3

R		R(Cmax)	Cmax	65.6	73.8	82.0	90.2	98.4	106.6	114.8	ft.
114.8	ň/ň	52.8 ft. 28.5 ft.	5,510 11,020	4,300 4,120	3,750 3,570	3,310 3,130	2,950 2,750	2,670 2,450	2,420 2,200	2,200 1,980	lbs.
106.6		52.8 ft. 28.5 ft.	5,510 11,020	4,300 4,140	3,770 3,570	3,330 3,130	2,970 2,750	2,670 2,470	2,420 2,200		
98.4		56.1 ft. 30.1 ft.	5,510 11,020	4,610 4,430	4,010 3,830	3,550 3,350	3,170 2,950	2,860 2,640			
90.2	Ų/Ų	57.7 ft. 31.1 ft.	5,510 11,020	4,780 4,580	4,160 3,970	3,700 3,480	3,310 3,080				
82.0		58.3 ft. 31.6 ft.	5,510 11,020	4,850 4,650	4,230 4,010	3,750 3,530					
73.8		58.0 ft. 31.1 ft.	5,510 11,020	4,810 4,580	4,190 3,970						
65.6	ñ\ñ	58.7 ft. 31.5 ft.	5,510 11,020	4,850 4,630							

**DS.0551.10** 12/05 Reserva de modificaciones.- Subject to modifications.- Modifications reservèes.- Konstruktionsänderungen vorbehalten.

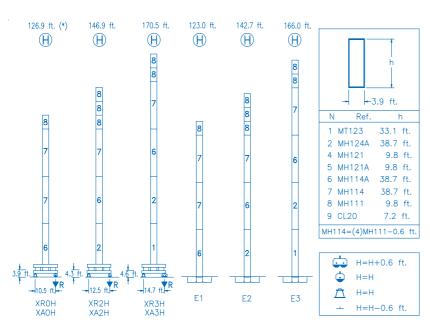







R. máx. En servicio
In operation
En service
In Betrieb

XR0H .... 83,330 lbs. XR2H .... 93,040 lbs. XR3H .... 98,550 lbs. R. máx. Fuera de servicio
Out of service
Hors service
Ausser Betrieb


XR0H .... 128,750 lbs.
 XR2H .... 158,510 lbs.
 XR3H .... 176,590 lbs.



CS2-1.9

3 hp.

63 ft./min 189 ft./min





**GR-6.5** 

48 ft.lbs.


0.9 rpm



TS2-3.0 TS2-4.5 TS2-5.5 2x22 ft.lbs. 2x33 ft.lbs. 2x40 ft.lbs


0 🖒 78 ft./min


XR0H XR2H XR3H




11,020

11,020







Tensión de alimentación
Operating voltage
Tension de service
Retriebeenannung

lbs

480 V 3 ph 60 Hz

5,730

Opcional
Optional
En option
Kaufoption



Tel.: (34) 948 335 020 Fax: (34) 948 330 810 e-mail: info@comansa.com www.comansa.com

Polígono Urbizkain E-31620 HUARTE-PAMPLONA.- SPAIN

